

Technické parametry pro VZ „Pixelový detektor“

MINIMÁLNÍ TECHNICKÉ POŽADAVKY ZADAVATELE

Požadavky zadavatele		Nabídka účastníka zadávacího řízení (dále jen "ÚZŘ") ÚZŘ doplní u technických parametrů konkrétní nabízené hodnoty nebo v případě, že nejsou požadovány konkrétní hodnoty, uvede ANO/NE
1.	Typ senzoru: monolitický s otvorem v centrální oblasti pro vedení budícího rentgenového svazku	ano
2.	Průměr otvoru: 2 – 5 mm	2 mm
3.	Materiál senzoru: křemík	ano
4.	Tloušťka senzoru: minimálně 0,5 mm	0,5 mm
5.	Počet pixelů: minimálně 400 x 400	512x512
6.	Velikost jednoho pixelu: od 40 do 60 mikrometrů	55 mikrometrů
7.	Rozsah měřitelných energií rentgenového záření: 4 – 25 keV	ano
8.	Energetická rozlišovací schopnost (FWHM): maximálně 2 keV	Energy resolution in full spectral mode (σ @ 23 keV): 0,7-1 keV

9.	Rychlost sběru dat: minimálně 10 milionů pixelů za sekundu	47 milionů pixelů/sek
10.	Hmotnost: maximálně 1 kg	0,9 kg
11.	Tloušťka detektoru: maximálně 4 cm	3,8 cm

** Zeleně označený sloupec doplní ÚZŘ*

ADVAPIX TPX3 QUAD

Datasheet

Model No.: A3QxHx-Xxx220308



General features

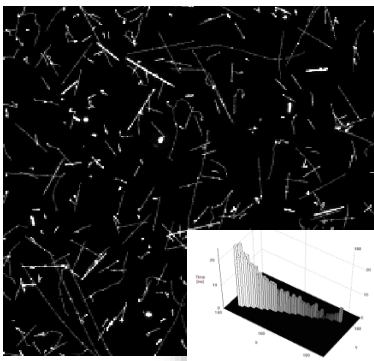


Illustration of single particle sensitivity of Timepix3 device. The tracks of different particles of radiation background (mostly muons and few protons) were recorded in 5 minutes on board of airplane. No noise (clean zero) is seen in dark regions. Inset shows the time profile along one muon track.

The **ADVAPIX TPX3 QUAD** modules were designed with special emphasis to performance and versatility which is often required in a scientific experimental work. They contain CERN detector Timepix3 for particle tracking and imaging with Si or CdTe sensor. The **ADVAPIX TPX3 QUAD** modules can be used in different configurations: telescope of several layers for better particle tracking and/or side-by-side for larger area coverage. Each module contains one Timepix3 device with fast sparse data readout to acquire up to 25 Mhits per second. A separate USB 3.0 channel for each module assures fast read-out of the whole modular system. The sensor type and thickness is of customer's choice.

The typical and intended applications of **ADVAPIX TPX3 QUAD** include:

- **Spectral X-ray and gamma ray imaging:** X-ray fluorescence imaging, X-ray radiography (low flux), scintigraphy or SPECT, radiography with isotopes.
- **Energy dispersive XRD, SAXS or WAXS:** Monochromatic X-ray source is NOT needed! Even high energy for thick samples is possible (e.g. 100 keV)!
- **Particle tracking and ion beam monitoring:** detectors can be used for tracking and tagging of primary particles (e.g. ions) as well as secondary radiation (spallation, fragmentation, recoiled, bremsstrahlung, prompt/delayed decays, neutrons¹ ...).
- **Neutron imaging:** The sensors can be adapted for neutron imaging by deposition of converter layers¹.

Recording shapes of individual hits together with advanced data processing allows increasing the spatial resolution in some applications to units of microns or even sub-micrometric level (for ions).

Main Features

- Readout chip type Timepix3
- Pixel size 55 x 55 μm^*
- Sensor resolution 256 x 256 pixels
- Time resolution 1.6 ns
- Power External or via second USB 3.0
- Interface USB 3.0 (Super-Speed)
- Maximum readout speed 47 million pixels / s
- Dimensions 210 x 94 x 38 mm

¹ Convertors based on ⁶LiF or ¹⁰B₄C for slow neutrons (efficiency up to 4%) or PE for fast neutrons.

*55 x 110 μm at the edges and 110 x 110 μm at the corners



Device parameters

Operating conditions

Symbol	Parameter	Value	Units	Comment
TA	Ambient Temperature Range	0-50	°C	
Φ	Humidity	<80	%	Not condensing
	Altitude*	<2000	m	Above sea level
IP	IP rating	IP40		With cover

Warning: Disconnect the device from power during pumping down or venting the vacuum chamber!

Electrical Specification

T_A = 25°C, USB voltage V_{CC} = 4.8V

Symbol	Parameter	Min	Typ	Max	Units	Comment
V _{CC}	Supply Voltage	20.0	24.0	26.0	V	
I _{CC}	Supply Current		400		mA	
I _{CC1}	Chip active		800	1500	mA	
P1	Power Dissipation			8	W	
I/O Conn. Input CMOS (pin 5,6,7,8,9)						
V _{INL}	Voltage Low	-0.3		0.7	V	
V _{INH}	Voltage High	1.7		2.8	V	
I/O Conn. Input LVDS (pin 3,4)						
V _{IN}	Voltage Range	0		2.5	V	
V _{INDIFF}	Differential Voltage	250		600	mV	
I/O Conn. +5V (pin 2)						
I _{MAX}	Maximum current	0		0.5	A	
V _{+5V}	Pin Voltage		4.5		V	V _{CC} – 0.5V
Bias Voltage Source for Sensor Diode						
V _{BIAS}	Bias Voltage	0		±500	V	Polarity is sensor dependent

Performance characteristics of Timepix3

Symbol	Parameter	Min	Typ	Max	Units	Comment
f	Hit-rate			47	MPixels/s	with USB 3.0 cable
	Data rate			2.4	Gbit/s	with USB 3.0 cable
TREAD	Frame Readout Time ³		33		ms	with USB 3.0 cable
dT	Time resolution	1.56			ns	
FREAD	Read-out frequency		320		MHz	½ of maximum ROC freq

¹ AdvAPIX_{TPX3} QUAD is not certified dosimetric device. It serves as the first level indicator and monitor of radiation fields allowing identification of a radiation type. Radiation protection of people cannot be based on measurements of AdvAPIX_{TPX3} QUAD.


² Dynamic range of final picture is theoretically unlimited; the only limiting factor is exposure time.

³ During Readout time (or Dead time), no signal is collected from the sensor.



Pixel mode hit-rate measurement


The whole detector is exposed to homogenous perpendicular irradiation from X-ray tube operated at 18 kVp with 2 mm Aluminum filter. The measurement type is set to “**Pixels**” and mode to “**ToT+ToA**” all other parameters are set to factory defaults (as stored in configuration file delivered with device). The exposure time is set to 0.1 s. The “Clustering” tool of PiXet-Pro is used to analyze measured data. The number of hit pixels per second is drawn as function of X-ray tube current searching for saturation. The real number of events is verified for each step using frame type measurement when all hits are accumulated in single frame.

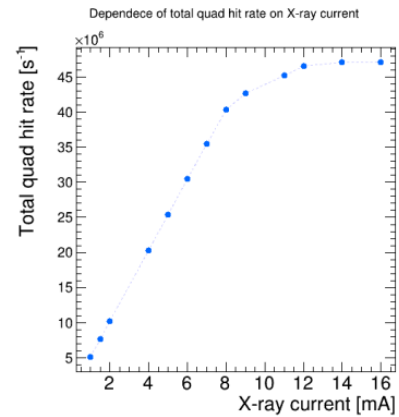

Sensor parameters

T_A = 25°C

Symbol	Parameter	Si			CdTe	Units	Comment
		100	300	500			
	Thickness	100	300	500	1000	µm	
σ	Energy resolution of energy discrimination threshold (σ @ 23 keV)	0.5			1.1	keV	
σ	Energy resolution of energy discrimination threshold (σ @ 60 keV)	0.6			1.5	keV	
σ	Energy resolution in full spectral mode (σ @ 23 keV)	0.7			3.0	keV	
σ	Energy resolution in full spectral mode (σ @ 60 keV)	1.0			3.6	keV	
	Typical detectable energy range for X-rays ⁴	5 to 60			5 to 500	keV	See chart below
	Pixel size	55			55	µm	

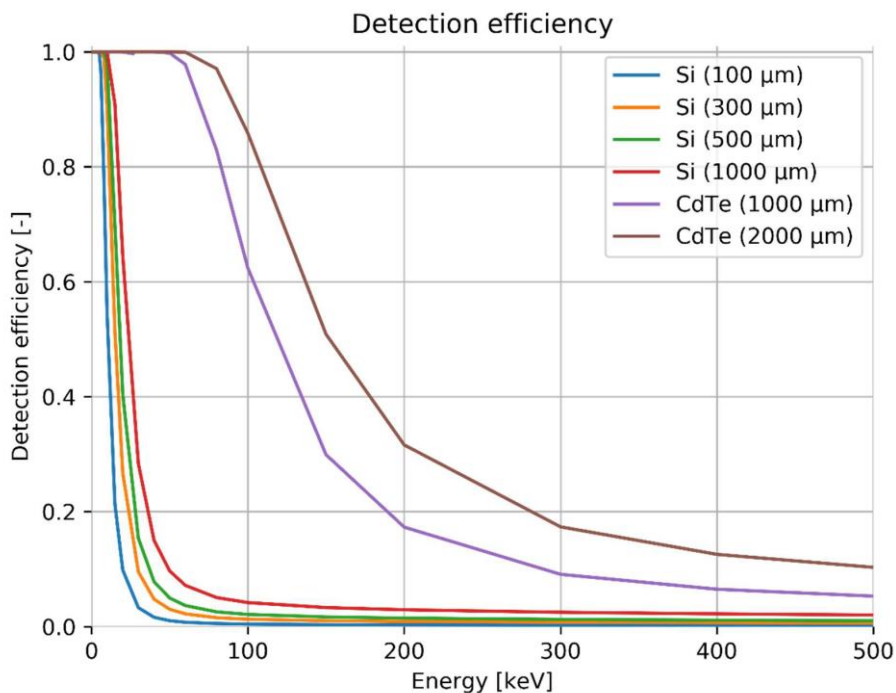

Basic principles, measurement types and modes

The ionizing radiation particle interacts with the sensor material creating an electric charge. This charge is collected by electric field and brought to pixel preamplifier where it is amplified and shaped forming triangular voltage pulse. The amplitude and duration of this pulse is proportional to energy deposited by particle within the pixel. The situation when the voltage pulse amplitude in particular pixel exceeds preselected threshold value is called “event” or “hit”.

Each pixel contains three digital counters (10, 14 and 4 bits). These counters are used differently according to measurement type and mode. There are four basic values which can be measured and stored in counters of each pixel:

Measurement modes:

- Number of Events** = number of events (hits) in the pixel during exposure time (this mode is suitable mainly for frame type readout).
- Time-over-Threshold (ToT)** = measured as number of periods of 40 MHz clock signal (25 ns step) when amplifier output signal stays over the energy threshold. The ToT can be transformed to energy in keV using per-pixel-calibration function. The coefficients for per-pixel-calibration are unique for each detector pixel and they are stored in configuration file delivered with device. The energy calibration is valid only for given values of other detector parameters as delivered in configuration file (especially threshold).
- Time-of-Arrival (ToA)** = number of periods of 40 MHz clock signal (25 ns step) from start of exposure till the event is registered by pixel (i.e. pulse in pixel crosses the threshold). The range is 409.6 μs. Additional 14 bits are added in FPGA in readout electronics so that the total range is 6.7 seconds. The additional bits are usable only if the pixel hit rate is below maximal value (see f_p in table of Performance characteristics).
- Fast-Time-of-Arrival (FToA)** = time difference between event detection and next clock signal measured with step of 1.5625 ns. Range is 4 bits. The combination of ToA and FToA gives precise time of event detection in nanoseconds using following formula:

$$\text{Time [ns]} = \text{ToA} * 25 - \text{FToA} * 1.5625$$

ToA and FTOA are combined together by software. If saved then ToA and FToA are stored as separate items.

Measurement types:

- Frame type measurement** No data is sent out of device during the exposure time. All measured events are accumulated in counters of pixels. Event counter is incremented and ToT is integrated for all events. The measured data is read-out after end of exposure time for all pixels with nonzero content. No measurement can be performed during readout process.
- Pixel type measurement** Information about all hit pixels is read-out immediately and continuously during exposure time. If hit rate is below maximal value (see f_p in table of Performance characteristics) then there is virtually no deadtime.



Major modes and types of operation (rarely used combinations are shown with gray background):

Type	Mode	Range	Description
Frame (reading all pixels after end of exposure)	Event+iToT	10 bit + 14 bit	2 output frames per exposure: 1 st Events = Number of events in pixel, 2 nd iToT = total time over threshold for all events in pixel.
	iToT	14 bit	1 output frame: iToT = total time over threshold for all events in pixel.
	ToA	16 bit	1 output frame: ToA+FToA ^{Error! Bookmark not defined.} = Time of Arrival of first event in pixel.
Pixel (reading only hit pixels continuously during exposure)	ToT+ToA	10 bit + 16 bit	4 numbers per pixel per event: Position, ToT, ToA and FToA.
	ToA	16 bit	3 numbers per pixel per event: Position, ToA and FToA ^{Error! Bookmark not defined.} .
	Only ToT	10 bit	2 number per pixel per event: Position and ToT.

Vacuum Operation

The standard AdvaPIX TPX3 QUAD is not vacuum compatible but can be customized to be vacuum compatible. The vacuum compatible version operate only with air pressure lower than 10^{-3} Pa. Intended for dust free indoor use.


Make sure to disconnect the device from power during pumping down or venting the vacuum chamber!

External Cooling

Temperature stabilization is strongly recommended for consistent results. Attaching a Peltier cooling or cooling plate at the back of the detector should serve the purpose. The temperature should be set to 22°C.



Device description

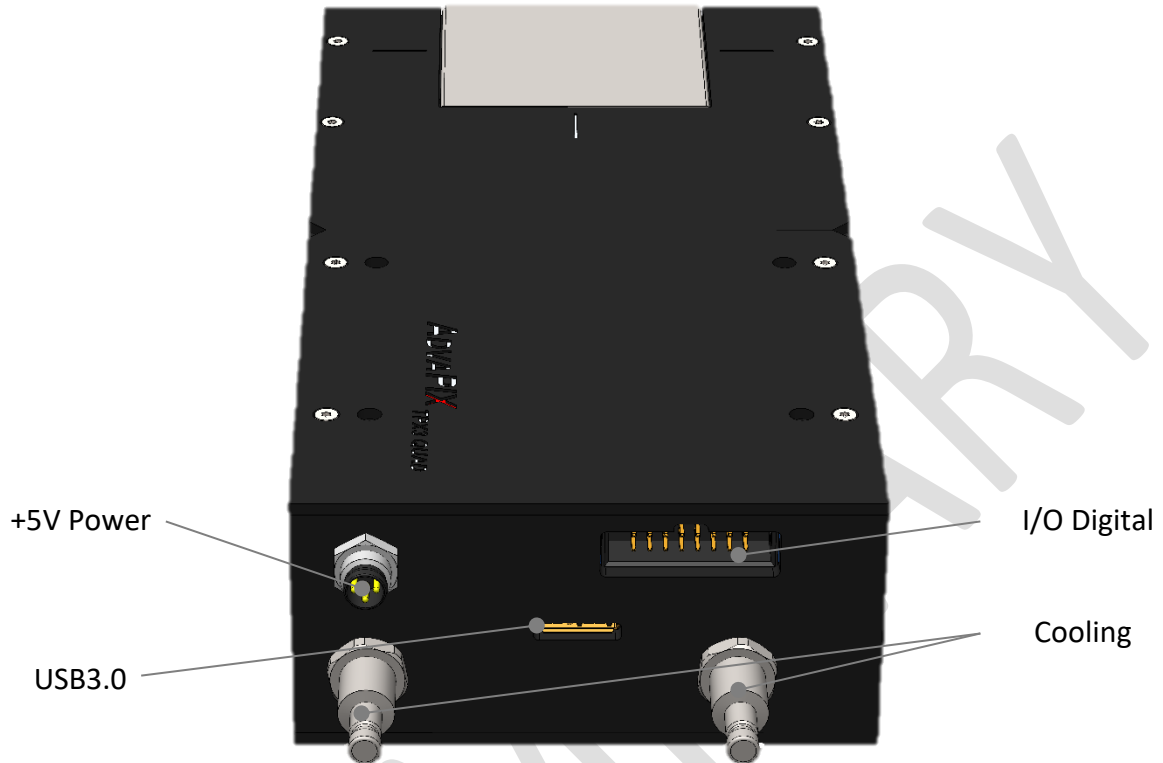

+24VDC connector

Main power supply (via standard M8 connector with 3 female contacts) Connect after plugging USB connector.

USB 3.0 connector

USB type micro B, Standard USB 3.0 Super-Speed.

I/O Digital connector

Signals on I/O Digital connector are used for synchronization purposes. For details see Synchronization guide for TPX3. Input pins are **NOT** +5V compatible. Pin 2 (+5V) may be used for power of external circuitry. It is taken directly from +5VDC connector, protected by schottky diode (0.5A max) Pin directions (Input/output) are dependent on polarity of pin 9 (Dir Select).

Pin	Name	Signal type	Pin	Name	Signal type
1	GND		2	+5V	
3	Master Disable	CMOS 0-2.5V/5V	4	CLK n	LVDS (2.5V)
5	CLK p	LVDS (2.5V)	6	T0/Sh-sel	CMOS 0-2.5V
7	Th/Sh p	LVDS (2.5V)	8	Th/Sh n	LVDS (2.5V)
9	Ready	CMOS 0-2.5V	10	T0/Sh-CMOS	CMOS 0-2.5V
11	Reserved	CMOS	12	Reserved	LVDS

13	Reserved	LVDS	14	Reserved	CMOS
15	Reserved	LVDS	16	Reserved	LVDS

The device is supplied with USB flash disk containing installer of PiXet-Pro software, unique device configuration and calibration file and protocol on quality tests.


The device is delivered with protective plastic box covering the sensitive detector part. The protective box is used only for transportation. **Protective cover has to be removed before use to avoid sensor damage from overheating.** The removing has to be performed with extreme care avoiding any touches to the sensor chip or wire-bonds. **Sensor chip is supplied with high voltage up to ±500V. To avoid sparks or unwanted discharge follow EN 61010-1** (chapter 6.7, Insulation requirements. Fig. 4, Tab. 6, Annex C).

PRELIMINARY



Mechanical dimensions

Straight with Hole 2x2 mm

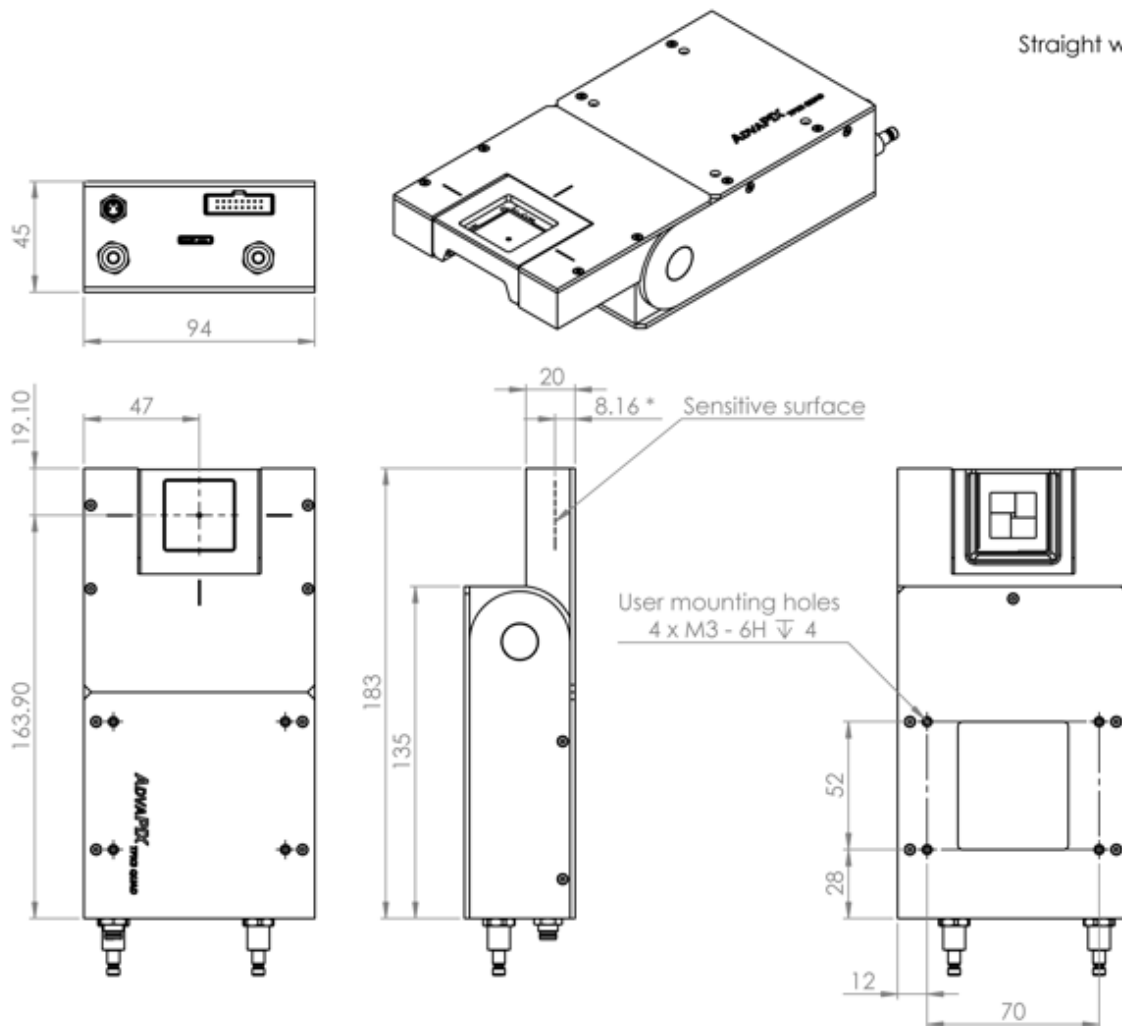


All dimensions are in mm.

PREVIEW



Following is the second orientation

Angled with Hole 2x2 mm

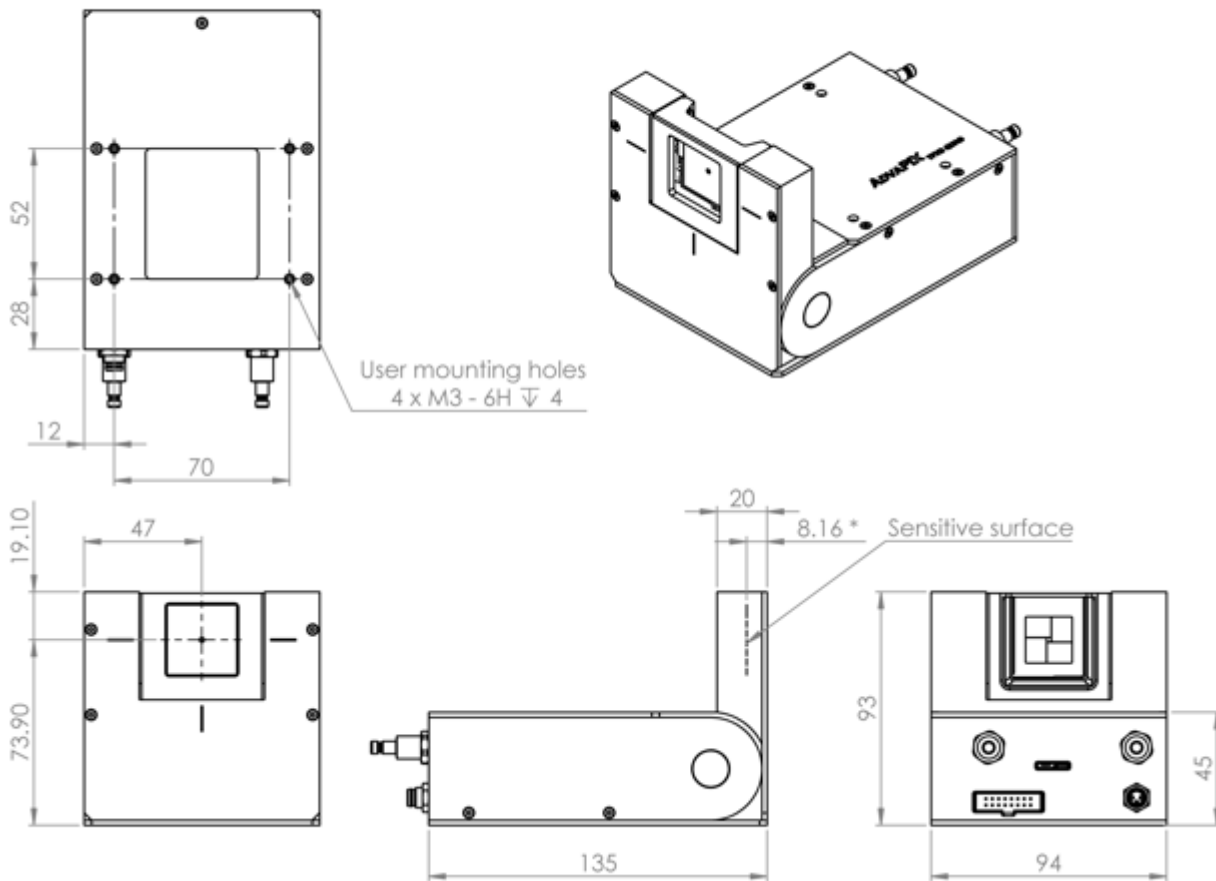

All dimensions are in mm.



Model Number Codes

Example:

A3Q xHx - X P 3 220308

Device name:

AdvaPIX Timepix3 Quad

Device modification:

- SH0 - Straight without Hole
- SH2 - Straight with Hole 2x2 mm
- AH0 - Angled without Hole
- AH2 - Angled with Hole 2x2 mm

Sensor type:

- M - Silicon monolithic
- C - CdTe

Sensor thickness:

- 1 – 100 µm
- 3 – 300 µm
- 5 – 500 µm
- A – 1000 µm
- B – 2000 µm

Device version date:

YY MM DD

Release history

Date	Changes
22/08/29	Preliminary datasheet
23/3/14	New mechanical drawings



Warning

Do not touch sensor surface!

Instructions for safe use

To avoid malfunction or damage to your **ADVAPIX** TPX3 QUAD please observe the following:

- Do not expose to water or moisture.
- Do not disassemble. Wire-bonding connection may be irreversibly damaged.
- Do not insert any object into the sensor window.
- Extreme care must be taken when removing the protecting cover or handling the **ADVAPIX** TPX3 QUAD without the protecting cover. Warranty does not apply to mechanical damage of the sensor and wirebonds
- The protection provided by this product may be impaired if it is used in a manner not described in this document

Copyright

ADVACAM s.r.o.

U Pergamenky 1145/12

170 00 Praha

Czech Republic

Tel: +420 608 605 533

Email:

sales@advacam.cz

www.advacam.com



ADVACAM



Financováno
Evropskou unií
NextGenerationEU



Národní
plán
obnovy



Příloha č. 2 Zadávací dokumentace
Příloha č. 3 Kupní smlouvy

Seznam poddodavatelů / Čestné prohlášení

1. Název veřejné zakázky
<u>Pixelový detektor</u>

2. Účastník zadávacího řízení	
Obchodní firma:	AdvaScope s.r.o.
Sídlo:	Kolejní 3093/7, 612 00 Brno - Královo Pole
IČO:	10961861
Právní forma:	Právnícká osoba, společnost s ručením omezeným

Varianta 2: Účastník zadávacího řízení čestně prohlašuje, že nemá v úmyslu zadat určitou část výše uvedené veřejné zakázky jiné osobě, tj. poddodavatel¹.

¹ Dodavatel vybere jednu z variant a nehodící se vymaže, popř. proškrtne