

Nabídka ZAK-2019-00458

Číslo dokladu: ZAK-2019-00458

Referent: [REDACTED]

Datum:

24.5.2019

Datum platnosti:

7.6.2019

Dodavatel:

Comes spol. s r. o.Třebohostická 2283/2
100 00 Praha 10

Sídlo: Vejvanovského 1615, 149 00 Praha 11, Chodov

IČ: 17047561, DIČ: CZ17047561

Zapsán v obch. rejstříku vedeném Krajským
obchodním soudem v Praze, oddíl C, vložka 2016

Odběratel:

Město SlanýVelvarská 136/1
274 01 Slaný, Kladno

IČ: 00234877, DIČ: CZ00234877

Platební údaje:

Způsob úhrady: Bankovním převodem

Požadovaná záloha: 0,00 Kč

Úrok: 0,1

Splatnost dní: 30

Měna: CZK

Obchodní údaje:

Doprava:

3.1 Server

Produkt Popis	Záruka	Množství	Cena za jedn.	Cena bez DPH	DPH	Cena celkem
765277	Záruka 12 měsíců					
HPE PL DL20G9 E3-1240v6 (3.7G/8M/2400) 16G H240 SAS/SATA 4SFF HP 1x290W 1-1-1		1 Ks	34 367,30	34 367,30 21%	7 217,13	41 584,43
574561	Záruka 12 měsíců					
HPE Memory Kit 16GB (1x16GB) DR x8 DDR4-2133 CAS-15-15-15 Unbuffered STD v5 cpu only		1 Ks	5 725,50	5 725,50 21%	1 202,36	6 927,86
788664	Záruka 36 měsíců					
HPE 480GB SSD 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware		2 Ks	8 798,90	17 597,80 21%	3 695,54	21 293,34
574641	Záruka 12 měsíců					
HPE 3Y FC NBD DL20 Gen9 SVC 3-3-3		1 Ks	5 384,50	5 384,50 21%	1 130,74	6 515,24
Celkem:		5 mj		63 075,10	13 245,77	76 320,87


Vystavil:

Strana 1 z 1

Overview


HPE ProLiant DL20 Gen9 Server

The dense and compact HPE ProLiant DL20 Gen9 Server powered by Intel Pentium, Core i3 and E3-1200v5 processors provides a unique blend of enterprise class capabilities & value. It offers outstanding configuration flexibility to cater to a wide variety of business requirements at an affordable price point.



Front View


- | | | | |
|----|---|-----|----------------------|
| 1. | Access Panel | 2. | Optical Drive |
| 3. | Serial number/iLO information pull tab | 4. | 2 USB 2.0 connectors |
| 5. | Health LED | 6. | Front 2 Fan Assembly |
| 7. | Power On/Standby button and system power LED button | 8. | UID LED |
| 9. | NIC status LED | 10. | Hard Drive Bays |



Rear View

- | | | | |
|----|--|----|-----------------------------|
| 1. | Expansion Slot 1, PCIe x 8 | 2. | Expansion Slot 2, PCIe x 16 |
| 3. | Redundant Power Supply (only on SFF Chassis) | 4. | UID LED |
| 5. | NIC Connector 2 | 6. | Video Connector |
| 7. | NIC1/shared iLO connector | 8. | USB 3.0 Connector |

Overview



Internal View

1. Fan cage shown with 2 fans

3. (Under) Power supply (1x 290W power supply shown)

5. Internal USB 3.0 connector

7. PCIe Riser

9. 1 Processor, heatsink showing, with HP Smart Socket Guide
2. DDR4 DIMM slots. 4 slots

4. Central Fan Assembly

6. Embedded HPE Smart Array B140i controller

8. MicroSD card slot

What's New

- New SMB SKU Offerings.
- New SSD offering.

Standard Features

NOTE: For more information regarding Intel Xeon processors, please see the following

<http://www.intel.com/xeon>.

Intel® Xeon® processor E3-1200v5 quad core processor family is designed to deliver the best combination of performance, built-in capabilities, and cost-effectiveness. The product also supports Intel® Pentium® and Intel® Core-i3 dual core processors. Choose one of the following processors based on the model:

Processor

One of the following depending on model

Model	CPU frequency	Cores	L3 Cache	Power	DDR4 Hz
G4400	3.3GHz	2	3MB	54W	2133
G4500	3.5GHz	2	3MB	51W	2133
i3-6100	3.7GHz	2	3MB	51W	2133
E3-1220v5	3.0GHz	4	8MB	80W	2133
E3-1225v5	3.3GHz	4	8MB	80W	2133
E3-1230v5	3.4GHz	4	8MB	80W	2133
E3-1240v5	3.5GHz	4	8MB	80W	2133
E3-1270v5	3.6GHz	4	8MB	80W	2133
E3-1280v5	3.7GHz	4	8MB	80W	2133
G4560	3.5GHz	2	3MB	54W	2400
i3-7300	4.0GHz	2	3MB	51W	2400
E3-1220v6	3.0GHz	4	8MB	72W	2400
E3-1225v6	3.3GHz	4	8MB	73W	2400
E3-1230v6	3.5GHz	4	8MB	72W	2400
E3-1240v6	3.7GHz	4	8MB	72W	2400
E3-1270v6	3.8GHz	4	8MB	72W	2400
E3-1280v6	3.9GHz	4	8MB	72W	2400

Chipset

Intel® C232 Chipset

NOTE: For more information regarding Intel® chipsets, please see the following

On System

HPE iLO (Firmware HPE iLO4 2.3) 4GB NAND

Management Chipset

NOTE: 1GB USB user space configurable via UEFI and accessible via iLO. Read and learn more in the

Memory

One of the following depending on model

Type:

DDR4 Unbuffered (UDIMM)

Unbuffered (UDIMM)

DIMM Slots Available

4

4 DIMM slots per processor; 2 channels per processor, 2 DIMMs per channel

Maximum Capacity (UDIMM)

64GB

(4 x 16GB UDIMM @2400MHz)

Memory Protection

ECC

Standard Features

Network Controller HPE Ethernet 1Gb 2-port 332i network Adapter or BCM5720.

The HPE ProLiant DL20 Gen9 server offers the customer a dual-port NIC standard with the option to upgrade with a variety of networking options.

Expansion Slots

Dual side Low profile riser

Expansion Slots #	Technology	Bus Width	Connector Width	Form Factor
1	PCIe 3.0	x8	x8	Half length/half height
2	PCIe 3.0	x8	x8	Half length/full height

NOTE: Bus Width data indicates the number of physical electrical lanes running to the connector.

FlexibleLOM Riser

Expansion Slots #	Technology	Bus Width	Connector Width	Form Factor
1	Flexible LOM	x8	x8	Half length/half height
2	PCIe 3.0	x8	x8	Half length/full height

NOTE: This riser is mandatory for installing FlexibleLOMs.

GPU Riser

Expansion Slots #	Technology	Bus Width	Connector Width	Form Factor
1	PCIe 3.0	x16	x16	Half length/full height

NOTE: It is mandatory to choose one of the above risers.

Storage Controller

One of the following depending on model

Entry Models	HPE Dynamic Smart Array B140i Controller
Base Models	HPE Dynamic Smart Array B140i Controller
Performance Models	HPE H240 FIO Smart Host Bus Adapter

NOTE: B140i provides support for up to 4 SATA drives, data transmission speeds up to 6Gb/s and supports RAID 0, 1 & 5 on DL20 Gen9.

NOTE: H240 provides support for up to 4 SAS/SATA drives, data transmission speeds up to 12Gb/s and supports RAID 0, 1 & 5 on DL20 Gen9.

NOTE: DL20 Gen9 also supports other controller options like P440; read additional option to know more.

Standard Features

Internal Storage
Devices

One of the following
depending on model

Optical Drive	Ships standard in Performance Models
	Optional: DVD-ROM, DVD-RW
Optical Drives	Optional: DVD-ROM, DVD-RW
Hard Drives	None ship standard
Hard Drive Bays	4 SFF drive bays total with Optical Bay
	2 LFF drive bays total with Optical Bay

NOTE: HPE ProLiant DL20 Gen9 server offers Hot plug LFF, Non hot plug LFF and SFF versions. The Optical Drive bay is available with both hot plug models.

NOTE: Drive cage changes are not supported.

NOTE: All Pre-configured Models come populated with some hard drive blanks installed. Should the customer need additional hard drive blanks, they can order more using either HPE SFF Gen9 Hard Drive Blank Kit (654961-B21), HPE LFF Gen9 Hard Drive Blank Kit (689745-B21) or HPE LFF Gen9 Hard Drive Blank kit (654963-B21). These part numbers for single HDD blanks below are also provided should the customer require replacement HDD blanks for their server.

Maximum Internal Storage		CAPACITY	CONFIGURATION
	Hot Plug SFF SAS	8TB	4 x 2TB
	Hot Plug SFF SATA	8TB	4 x 2TB
	Hot Plug LFF SAS	20TB	2 x 10TB
	Hot Plug LFF SATA	20TB	2 x 10TB
	Hot Plug SFF SAS SSD	15.36TB	4 x 3.84TB
	Hot Plug SFF SATA SSD	15.36TB	4 x 3.84TB
	Hot Plug LFF SATA SSD	15.36TB	4 x 3.84TB
	Non Hot Plug LFF SATA	8TB	2 x 4TB

Standard Features

Power Supply

One of the following depending on model

HPE 290W FIO Power Supply

HPE 900W AC 240V DC Redundant Power Supply

NOTE: HPE 900W Redundant Power Supply supports 100VAC to 240VAC and also supports 240VDC.

HPE Entry-Level Power Supplies provide lower-cost options for customers trying to balance their need for enterprise class efficiency and reliability while maintaining lowest possible hardware costs. The above mentioned Entry-Level power supply options have been designed specifically for HPE ProLiant DL20 Gen9 Server.

The HPE 290W FIO Power Supply is the standard, non-redundant AC power supply with 80Plus Silver Certification. It features 92% power efficiency with a set of features optimized for the DL20 Gen9 rack server.

The HPE 900W Gold (Redundant) AC/240V DC Power Input Module with Power Backplane can be configured to support power redundancy in ProLiant servers that offer only a single power supply bay, providing additional protection against power loss. With an 80 Plus Gold power efficiency rating (up to 92%), this power option helps to reduce operating expenses while protecting against trapped power capacity in the data center. The power backplane option can support up to two (2) hot-plug AC power input modules. This Redundant power supply option is only supported on DL20 Gen9 SFF chassis model.

All pre-configured servers ship with a standard 6-foot IEC C-13/C-14 jumper cord (A0K02A). This jumper cord is also included with each standard AC power supply option kit.

To review the power requirements for your selected system, please use the HPE Power Advisor Tool located at [\[redacted\]](#)

System Fans

One of the following depending on model

	Non-redundant	Redundant
1P model	3 fans	NA
NOTE: DL20 has 3 fans, 2 front fan assemblies and 1 center fan assembly which ship standard, non-redundant.		

Interfaces

Video	1 rear video connector
USB	5 USB ports (standard) Front: 2xUSB 2.0 Rear: 2xUSB 3.0 Internal: 1x USB 3.0
Micro SD Slot	1 Micro SD
NOTE: The SD slot is not a hot-pluggable device. Customers should not attempt to plug an SD card into the SD slot while the server is powered.	
LOM Network Ports	2x1GbE ports
NOTE: Customers can upgrade to next generation network (10 GbE) by installing a FlexibleLOM riser.	

Standard Features

Operating Systems and Virtualization	<u>Microsoft Windows Server</u>
Software Support for ProLiant Servers	<u>Red Hat Enterprise Linux (RHEL)</u>
	<u>SUSE Linux Enterprise Server (SLES)</u>
	<u>VMware</u>
	<u>ClearOS</u>
	NOTE: VMWare availability is dependent on General availability from the vendor. DL20 supports VMWare 5.5U3 and 6.0 U1.
	NOTE: ClearOS allows you to build a fully functional server that is just right for you at no upfront cost. It is available via CTO preload, Intelligent Provisioning or via download. For more information on ClearOS, please visit [redacted]
	NOTE: For [redacted] Enterprise Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server, please visit [redacted]

Upgradeability	FlexibleLOM connector for 1 Gigabit or 10 Gigabit networking options
One of the following depending on model	Up to 4 DIMM slots available for higher memory capacity
	Up to 4-SFF Drive bays or 2LFF Drive bays
	HPE Smart Array or Smart HBA Controller
	Redundant Power Supply
	NOTE: RPS is only compatible with DL20 SFF Chassis. Customer can upgrade from DL20 Gen9 on SFF chassis with 290W PSU to 900W redundant power supply.

Industry Standard Compliance	UEFI (Unified Extensible Firmware Interface Forum)
	PCIe 3.0 Compliant
	PXE Support
	WOL Support
	Microsoft® Logo certifications
	USB 3.0 Support
	ASHRAE A3
	NOTE: Refer to technical specifications section for more details.

Graphics	Integrated Matrox G200 video standard
	On board graphics: Integrated Matrox G200 video standard
	• 1280 x 1024 (32 bpp)
	• 1920 x 1200 (16 bpp)
	HP iLO 4 On System Management Memory
	• 16 MB Flash
	• 256 MB DDR 3 with ECC (112 MB after ECC and video)
	HPE NVIDIA Quadro M2000 GPU Module
	NOTE: Install GPU riser option to support GPU card. A GPU enablement kit 811271-B21 is mandatory to support GPU.

Standard Features

HPE Server
UEFI/Legacy ROM

Unified Extensible Firmware Interface (UEFI) is an industry standard that provides better manageability and more secured configuration than the legacy ROM while interacting with your server at boot time. HPE ProLiant Gen9 platform defaults to UEFI and can be factory or field configured for Legacy BIOS Boot Mode.

NOTE: The UEFI System Utilities function is analogous to the HPE ROM-Based Setup Utility (RBSU) of

UEFI enables numerous new capabilities specifi

- Secure Boot
- Operating system specific functionality
- Support for > 2.2 TB (using GPT) boot drives
- USB 3.0 Stack
- Embedded UEFI Shell
- Mass Configuration Deployment Tool using RESTful API for iLO 4
- PXE boot support for IPv6 networks
- Boot support for option cards that only support a UEFI option ROM
- Network Stack configurations

NOTE: For UEFI Boot Mode, boot environment and OS image installations should be configured properly to support UEFI.

NOTE: UEFI FIO Setting (758959-B22) can be selected to configure the system in Legacy mode in the factory for your HPE ProLiant Gen9 Server.

Form Factor
One of the following
depending on model

1U Rack form factor
4SFF and 2LFF version:
1.70" (4.32cm) Height x 15.05" (38.22cm) Depth x 17.11" (43.46cm) Length

NOTE: Depth of the chassis is measured from rear to ear at 15.05". Depth from rear to bezel is 15.5".

Embedded
Management

HPE Integrated Lights-Out (HPE iLO) Monitor your servers for ongoing management, service alerting, reporting and remote management with HPE iLO. Learn more at

UEFI Configure and boot your servers securely with industry standard Unified Extensible Firmware Interface (UEFI). Learn more at

RESTful API RESTful API for iLO 4 is Redfish 1.0 conformance for simplified server management such as configuration and maintenance tasks based on modern industry standards. Learn more at

Intelligent Provisioning Hassle free server and OS provisioning for 1 or few servers with Intelligent Provisioning. Learn more at

Embedded Remote Support The Hewlett Packard Enterprise embedded remote support, when used with Insight Online direct connect or HPE Insight Remote Support, allows HPE ProLiant servers to transmit hardware events directly to Hewlett Packard Enterprise or a Hewlett Packard Enterprise Authorized Partner for automated phone home support. Learn more at

Standard Features

Server utilities

Smart Update Optimize firmware and driver updates with Smart Update solutions including Smart Update Manager (SUM) and Service Pack for ProLiant (SPP). Learn more at [REDACTED]

HPE Systems Insight Manager (HPE SIM) HPE SIM allows you to monitor the health of your HPE ProLiant Servers and HPE Integrity Servers, and also provides you with basic support for non-HPE servers. HPE SIM also integrates with Smart Update Manager to provide quick and seamless firmware updates. Learn more at [REDACTED]

Scripting Tool Kit and Windows PowerShell Provision 1 to many servers using your own scripts to discover and deploy them with Scripting Tool Kit (STK) for Windows and Linux or Scripting Tools for Windows PowerShell. Learn more at [REDACTED]

RESTful Interface Tool RESTful Interface tool is a scripting tool to provision using RESTful API for iLO 4 to discover and deploy servers at scale. Learn more at [REDACTED]

HPE iLO Mobile Application Enables the ability to access, deploy, and manage your server anytime from anywhere from select smartphones and mobile devices. For additional information please visit: [REDACTED]

HPE Insight Online HPE Insight Online, available at no additional cost as part of your Hewlett Packard Enterprise warranty or contractual support agreement with Hewlett Packard Enterprise, is a personalized dashboard for simplified tracking of IT operations and support information from anywhere, anytime. Learn more at [REDACTED]

Security

Power-on password
Serial interface control
Administrator's password
UEFI
TPM 1.2
TPM 2.0
APCI 2.0b

Warranty

This product is covered by a global limited warranty and supported by HPE Services and a worldwide network of HPE Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HPE Pointnext operational services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

NOTE: Server Warranty includes 1-Year Parts, 1-Year Labor, 1-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have Hewlett Packard Enterprise replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at: [REDACTED]

Optional Features

Embedded Management

iLO Essentials

HPE iLO Essentials is the preferred license for small and medium business that offers full remote server management capabilities for small and medium business via the Integrated Remote Console (IRC), virtual media, and e-mail based alerts. Learn more about HPE iLO

iLO Scale-Out

HPE iLO Scale-Out is the preferred license built for web hosting, cloud service providers, and high performance computing data centers, managing massive scale out environments for the DL 100 and 10 series servers, not available for ML servers. This license offers sophisticated scripting tools that provides remote access through Text Console via SSH, Dynamic power capping, Email-based Alerting and proactive notifications. For more

iLO Advanced

HPE iLO Advanced licenses offer smart remote functionality without compromise, for all HPE ProLiant servers. The license includes the full integrated remote console, virtual keyboard, video, and mouse (KVM), multi-user collaboration, console record and replay, and GUI-based and scripted virtual media and virtual folders. You can also activate the enhanced security and power management functionality. Learn more about HPE iLO

Server Management

HPE Insight Control

HPE Insight Control, lets you deploy, migrate, monitor, remote control, and optimize your IT infrastructure through a single, simple management console. For more information,

Rack and Power Infrastructure

HPE Rack and Power Infrastructure products and services create highly efficient and intelligent solutions for existing or new IT data centers. HPE Rack and Power infrastructure solutions – rack infrastructure, power protection and management, performance optimized data centers (PODs) – are the foundation you are looking for to help secure your long-term IT success. These products are designed to help you react to changes in the industry. They deliver efficient, easy-to-use capabilities to manage, monitor, deploy and provision infrastructure from entry to enterprise. As an industry leader, Hewlett Packard Enterprise is uniquely positioned to address the key concerns of power, cooling, cable management and system access. Learn more at [HPE Rack and Power Infrastructure](#).

High Performance Clusters

HPE Cluster Platforms are specifically engineered, factory-integrated large-scale ProLiant clusters optimized for High Performance Computing, with a choice of servers, networks and software. Operating system options include specially priced offerings for Red Hat Enterprise Linux and SUSE Linux Enterprise Server, as well as Microsoft Windows HPEC Server. A Cluster Platform Configurator simplifies ordering.

HPC Interconnects

NOTE: High Performance Computing (HPC) interconnect technologies are available for this server under the HPE Cluster Platform product portfolio. These high-speed interconnects are fully supported by Hewlett Packard Enterprise when they are part of these configure to order clusters. Solutions can be defined with a lot of flexibility with the help of configuration tools. Please visit the following URL to configure HPEC Clusters with InfiniBand Interconnects:

Storage Software

Whether you're a large enterprise or a smaller business, Hewlett Packard Enterprise data protection and recovery software will cost-effectively protect you against disaster and ensure business continuity.

Optional Features

ClearOS HPE and ClearCenter will help you lower the cost of building on-premise solutions without sacrificing security and ease of use. HPE ProLiant servers with ClearOS give you a simple, secure, and affordable operating system with an intuitive web based graphical user interface that provides a cloud-like experience on- premise, and an Application Marketplace with over 100 apps and growing. Whether you're starting out or scaling, you decide what applications you need and pay as you grow.

One Config Simple (SCE) SCE is a guided self-service tool to help sales and non-technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact Hewlett Packard Enterprise Customer Business Center or an Authorized



Service and Support

HPE Support Services

HPE Technology Services delivers confidence, reduces risk and helps customers realize agility and stability. Connect to Hewlett Packard Enterprise to help prevent problems and solve issues faster. HPE Support Services enable you to choose the right service level, length of coverage and response time as you purchase your new server, giving you full entitlement to the support for need for your IT and business.

Connect your devices Unlock all of the benefits of your technology investment by connecting your products to Hewlett Packard Enterprise. Achieve up to 77%¹ reduction in down time, near 100%² diagnostic accuracy and a single consolidated view of your environment. By connecting, you will receive 24x7 monitoring, pre-failure alerts, automatic call logging, and automatic parts dispatch. HPE Proactive Care Service and HPE Datacenter Care Service customers will also benefit from proactive activities to help prevent issues and increase optimization. All of these benefits are already available to you with your server storage and networking products, securely connected to Hewlett Packard Enterprise support.

1- IDC 2 – HPE CSC reports 2014 - 2015

Recommended Support

Basic: HPE Foundation Care NBD, three-year Support Service HPE Foundation Care Next Business Day connects you to Hewlett Packard Enterprise during business hours for assistance on resolving issues – This service features need based next business day hardware onsite response and software call back within two hours. In addition, Collaborative software support and provides troubleshooting assistance on industry leading software running on your HPE server. Simplify your support experience and make Hewlett Packard Enterprise your first call to help resolve hardware or software problems.

Standard: HPE Foundation Care 24x7, three-year Support Service

HPE Foundation Care 24x7 gives you access to Hewlett Packard Enterprise 24 hours a day, seven days a week for assistance on resolving issues. This service includes need based Hardware onsite response within four hours. In addition, collaborative software support is included in this service that provides troubleshooting assistance on industry leading software running on your HPE server. Simplify your support experience and make Hewlett Packard Enterprise your first call to help resolve hardware or software problems.

Optimized: HPE Proactive Care* with 24x7 coverage, three year Support Service

HPE Proactive Care gives customers an enhanced call experience. When your products are connected to Hewlett Packard Enterprise, Proactive Care helps prevent problems and maintains IT stability by utilizing personalized proactive reports with recommendations and advice. This service combines three years proactive reporting and advice with our 24x7 coverage, four hour hardware response time when there is a problem. This service also includes collaborative software support for Independent Software Vendors (ISVs), (Red Hat, VMWare, Microsoft, etc.) running on your HPE servers.

Parts and Materials

Hewlett Packard Enterprise will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product quick-specs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by Hewlett Packard Enterprise due to malfunction.

Service and Support

Related Services

HPE Server Hardware Installation

Provides for the basic hardware installation of Hewlett Packard Enterprise branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner.

HPE Installation and Startup Service

Provides for the installation and startup of Hewlett Packard Enterprise technology including BladeSystems, C-Class enclosure, HPE ProLiant c-Class and Integrity server blades, storage blades, SAN switch blades, HPE Virtual Connect modules (Ethernet and Fibre Channel), Ethernet network interconnects, and InfiniBand, as well as the installation of one supported operating system type (Windows® or Linux).

HPE Technology Services Support Credits

Offer flexible services and technical skills to meet your changing IT demands. With a menu of service that is tailored to suit your needs, you get additional resources and specialist skills to help you maintain peak performance of your IT. Offered as annual credits, you can plan your budgets while proactively responding to your dynamic business.

HPE Education Services

Keep your IT staff trained making sure they have the right skills to deliver on your business outcomes. Book on a class today and learn how to get the most from your technology investment.

HPE Support Center

The HPE Support Center is a personalized online support portal with access to information, tools and experts to support Hewlett Packard Enterprise business products. Submit support cases online, chat with Hewlett Packard Enterprise experts, access support resources or collaborate with peers.

The Hewlett Packard Enterprise Support Center Mobile App* allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalized IT support anywhere, anytime. HPE Insight Remote Support and HPE Support Center are available at no additional cost with a Hewlett Packard Enterprise warranty, HPE Support Service or Hewlett Packard Enterprise contractual support agreement.

*HPE Support Center Mobile App is subject to local availability.

Pre-configured Models

For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

1. Pre-configured models ship with the configurations below. Options can be selected from the Core or Additional options section of this QuickSpecs.
2. Hewlett Packard Enterprise does not allow factory integration of options into pre-configured models. Any additional options purchased will be shipped separately.
3. If you desire a custom configuration please see "Configuration Information - Factory Integrated Models" section of this QuickSpecs.

NOTE: All Pre-configured Models come populated with some hard drive blanks installed. Should the customer need additional hard drive blanks, they can order more using either HPE SFF Hard Drive Blank Kit (666987-B21) or HPE LFF Hard Drive Blank Kit (666986-B21).

NOTE: All pre-configured servers ship with a standard 6-foot IEC C-13/C-14 jumper cord (A0K02A). This jumper cord is also included with each standard AC power supply option kit. If a different power cord is required, please check the [ProLiant Power Cables](#) web page.

CAUTION: Hewlett Packard Enterprise recommends that a minimum of two people are required for all Rack Server installations. Please refer to your installation instructions for proper tools and number of people to use for any installation

	Entry Models		Base Models	
[SKU Number]	829889-B21	871428-B21	823556-B21	871429-B21
Model Name	HPE ProLiant DL20 Gen9 G4400 4GB-U Non-hot Plug 2LFF 290W PS Entry Server	HPE ProLiant DL20 Gen9 G4560 8GB-U Non-hot Plug 2LFF 290W PS Entry Server	HPE ProLiant DL20 Gen9 E3-1220v5 8GB-U B140i 2LFF 290W PS Base Server	HPE ProLiant DL20 Gen9 E3-1220v6 8GB-U B140i 2LFF 290W PS Base Server
Processor	Intel® Pentium® G4400	Intel® Pentium® G4560	Intel® Xeon® E3-1220v5	Intel® Xeon® E3-1220v6
Number of Processors	One			
Memory	4GB (1x4GB UDIMMs, 2133 MHz)	8GB (1x8GB UDIMM, 2400 MHz)	8GB (1x8GB UDIMMs, 2133 MHz)	8GB (1x8GB UDIMM, 2400 MHz)
Network Controller	HPE embedded 1Gb 2-port 332i network Adapter			
Storage Controller	HPE Dynamic Smart Array B140i			
Hard Drive	None ship standard; includes 2 LFF hard drive blanks		None ship standard	
Internal Storage	2 LFF HDD Bays (Non Hot Plug)		2 LFF HDD Bays (Hot Plug)	
Optical Drive Bay	1; (Optional: DVD-ROM, DVD-RW)			
Optical Drive	None			
PCI-Express Slots	2 PCIe 3.0 slots			
Power Supply	(1) 290W Non Hot Plug Power Supply			
Fans	3 non hot plug, non-redundant			
Management	iLO Management (standard), Intelligent Provisioning (standard), iLO Essentials (optional), iLO Scale-out (optional only for DL), iLO Advanced (optional)			
Form Factor	Rack (1U), HPE Short Friction Rail Kit			
Warranty	Server Warranty includes 1-Year Parts, 1-Year Labor, 1-Year Onsite support with next business day response			

Pre-configured Models

	Performance Models			
[SKU Number]	823559-B21	823562-B21	871430-B21	871431-B21
Model Name	HPE ProLiant DL20 Gen9 E3-1240v5 8GB-U H240 4SFF 290W PS Performance Server	HPE ProLiant DL20 Gen9 E3-1240v5 8GB-U H240 4SFF 900W RPS Performance Server	HPE ProLiant DL20 Gen9 E3-1240v6 16GB-U H240 4SFF 290W PS Performance Server	HPE ProLiant DL20 Gen9 E3-1240v6 8GB-U H240 4SFF 900W RPS Performance Server
Processor	Intel® Xeon® E3-1240v5		Intel® Xeon® E3-1240v6	
Number of Processors	One			
Memory	8GB (1x8GB UDIMMs, 2133 MHz)		16GB (1x16GB UDIMMs, 2400 MHz)	
Network Controller	HPE embedded 1Gb 2-port 332i network Adapter			
Storage Controller	HPE H240 Smart Host Bus Adapter			
Hard Drive	None ship standard			
Internal Storage	4 SFF HDD Bays			
Optical Drive Bay	1; (Optional: DVD-ROM, DVD-RW)			
Optical Drive	None			
PCI-Express Slots	2 PCIe 3.0 slots			
Power Supply	(1) 290W Non Hot Plug Power Supply	(1) HPE 900W Redundant Power Supply and RPS Backplane kit	(1) 290W Non Hot Plug Power Supply	(1) HPE 900W Redundant Power Supply and RPS Backplane kit
Fans	3 non hot plug, non-redundant			
Management	iLO Management (standard), Intelligent Provisioning (standard), iLO Essentials (optional), iLO Scale-out (optional only for DL), iLO Advanced (optional)			
Energy Star		Meets Energy Star requirements		Meets Energy Star requirements
Form Factor	Rack (1U), HPE Short Friction Rail Kit			
Warranty	1-Year Parts, 1-Year Labor, 1-Year Onsite support with next business day response			

NOTE: HPE ProLiant DL20 Gen9 E3-1240v5 8GB-U H240 4SFF 900W RPS Performance Server (823562-B21) requires additional 900W Redundant Power supply input module for redundancy. Backplane cable kit is included and need not be added.

Pre-configured Models

SKU Number	P06049-B21
Model Name	HPE ProLiant DL20 Gen9 E3-1230v6 3.5GHz 4-core 1P 8GB-U H240 4SFF 900W PS Solution Server
Chassis	4SFF
Processor	Intel® Xeon® E3-1230v6
Number of Processors	One processor
Memory	8GB (1x8GB UDIMMs, 2400 MHz)
Network Controller	HPE embedded 1Gb 2-port 332i network Adapter
Storage Controller	HPE H240 Smart Host Bus Adapter
Hard Drive	None ship standard
Optical Drive	None ship standard
PCIe Slots	2 PCIe 3.0 slots
Power Supply	(2) HPE 900W Redundant Power Supply and RPS Backplane kit
Fans	3 non hot plug, non-redundant
Management	iLO Management (standard), Intelligent Provisioning (standard), iLO Essentials (optional), iLO Scale-out (optional only for DL), iLO Advanced (optional)
Energy Star	Meets Energy Star requirements
Form Factor	Rack (1U), HPE Short Friction Rail Kit
Operating System	ClearOS/VM Installer (USB) NOTE: ClearOS, an easy to use OS with an application marketplace, allows you to build a fully functional server that is just right for you at no upfront cost. To learn more on what you can do, please visit [REDACTED]
Warranty	1-Year Parts, 1-Year Labor, 1-Year Onsite support with next business day response

Configuration Information - Factory Integrated Models

This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

1. Factory Integrated Models must start with a CTO Server.
2. FIO indicates that this option is only available as a factory installable option.
3. All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server.
4. Some options may not be integrated at the factory. Contact your local sales representative for additional information.

Step 1: Base Configuration (choose one of the following configurable models)

CTO Server	HPE ProLiant DL20 Gen9 Non-hot Plug 2LFF Configure-to-order Server	HPE ProLiant DL20 Gen9 2LFF Configure-to-order Server	HPE ProLiant DL20 Gen9 4SFF Configure-to-order Server
SKU Number	819784-B21	819785-B21	819786-B21
Processor	1	1	1
DIMM Slots	4 DIMM slots for UDIMM DDR4 Memory		
Storage Controller	HPE Dynamic Smart Array B140i		
PCIe	2 PCIe 3.0 Slots		
Drive Cage	2LFF Non Hot Plug	2LFF Hot Plug	4SFF Hot Plug
Network Controller	HPE embedded 1Gb 2-port 332i network Adapter		
Fans	3 non hot plug, non-redundant		
Management	iLO Management (standard), Intelligent Provisioning (standard)		
USB	2 front, 1 internal, 2 rear		
Ears	HPE Thumbscrew Ears		

Step 2: Choose Required Options (only one of the following from each list unless otherwise noted)

HPE Processors E3-1200v6 series Processors

HPE DL20 Gen9 Intel Xeon E3-1220v6 (3.0GHz/4-core/8MB/72W) FIO Processor Kit	871049-L21
HPE DL20 Gen9 Intel Xeon E3-1230v6 (3.5GHz/4-core/8MB/72W) FIO Processor Kit	871051-L21
HPE DL20 Gen9 Intel Xeon E3-1240v6 (3.7GHz/4-core/8MB/72W) FIO Processor Kit	871053-L21
HPE DL20 Gen9 Intel Xeon E3-1225v6 (3.3GHz/4-core/8MB/73W) FIO Processor Kit	872140-L21

NOTE: On E3-1225v6 we do not support Intel's embedded graphics capability.

HPE DL20 Gen9 Intel Xeon E3-1270v6 (3.8GHz/4-core/8MB/72W) FIO Processor Kit	871055-L21
HPE DL20 Gen9 Intel Xeon E3-1280v6 (3.9GHz/4-core/8MB/72W) FIO Processor Kit	871057-L21

E3-1200v5 series Processors

HPE DL20 Gen9 E3-1220v5 (3.0GHz/4-core/8MB/80W) FIO Processor Kit	822425-L21
---	------------

Intel® Pentium® G4000 series Processors

HPE DL20 Gen9 Intel Pentium G4560 (3.5GHz/2-core/3MB/54W) FIO Processor Kit	871063-L21
---	------------

NOTE: DDR4 speed is the maximum memory speed of the processor. Actual memory speed may depend on the quantity and type of DIMMs installed.

NOTE: For the Intel® C232 Chipset E3-1200 Series, the letter preceding the model number indicates the Product Line (E3, E5, E7); 1200x v#, 1 is the number of the CPU, 2 is socket type/segment designation, 00=processor SKU, x=L for low power SKUs and v# (not yet designated) is the version number.

Configuration Information - Factory Integrated Models

HPE Memory

NOTE: Select one or more memory.

NOTE: HPE memory from previous generation servers are not qualified or warranted with this HPE ProLiant Server

NOTE: HPE Standard Memory (UDIMM) is required to realize the memory performance improvements and enhanced functionality listed in this document for this HPE ProLiant Server.

NOTE: With one processor installed, four DIMMs slots are available

NOTE:

NOTE: Depending on the memory configuration and processor model, the memory speed would run at 2133MHz. Please see Memory Population Table or the Online Memory Configuration Tool at: [REDACTED]

Unbuffered DIMMs (UDIMMs) – 2400MHz

NOTE: The following memory is supported by the E3-1200v6, i3-7000 and G4560 and G4600 processors only

HPE 8GB (1x8GB) Single Rank x8 DDR4-2400 CAS-17-17-17 Unbuffered Standard Memory Kit 862974-B21

HPE 16GB (1x16GB) Dual Rank x8 DDR4-2400 CAS-17-17-17 Unbuffered Standard Memory Kit 862976-B21

Unbuffered DIMMs (UDIMMs) – 2133 MHz

HPE 16GB (1x16GB) Dual Rank x8 DDR4-2133 CAS-15-15-15 Unbuffered Standard Memory Kit 805671-B21

HPE 8GB (1x8GB) Single Rank x8 DDR4-2133 CAS-15-15-15 Unbuffered Standard Memory Kit 819880-B21

NOTE: Depending on the processor selected these memory will run at 2133MHz.

HPE I/O Expansion Options

HPE DL20 Gen9 PCIe Low Profile Riser FIO Kit 854846-B21

HPE DL20 Gen9 Flexible LOM Riser Kit 811259-B21

HPE DL20 Gen9 GPU Enablement Kit 811271-B21

HPE Power Supplies

NOTE: Prior to selecting a power supply option, it is highly recommended that you review your server configuration in the HPE Power Advisor tool to determine the right size power supply for your server [REDACTED]

NOTE: On RPS Enablement Kit power options, mixing of power supplies in the same RPS enablement kit is not supported. All power supplies must be of the same input voltage, output rating, and efficiency rating. If non-matching power supplies are installed, you may receive an error message and/or experience operational issues with your server

HPE Entry-Level Power Supplies

HPE DL20 Gen9 290W FIO Power Supply Unit Kit 816283-B21

HPE 900W AC 240VDC Power Input FIO Module 828734-B21

NOTE: HP Server RPS FIO Backplane Kit (828735-B21) is required for this power supply.

NOTE: Up to two of these option kits can be installed in one system.

HPE 900W AC 240VDC Power Backplane FIO Kit 828735-B21

NOTE: One is required when one or two HPE 900W AC 240VDC Power Input FIO Modules (828734-B21) are ordered.

HPE DL20 Gen9 Redundant Power Supply Cable Kit 820306-B21

NOTE: This RPS backplane Cable kit is mandatory to be chosen along with 900W RPS Input Module (828734-B21).

Step 3: Choose Additional Factory Integratable Options (only one of the following from each list unless otherwise noted)

NOTE: All CTO Server models include mini-SAS cables required to connect drives to the embedded B140i SATA controller or H240 Smart Host Bus Adapter.

Configuration Information - Factory Integrated Models

HPE Storage Controllers	SAS Controllers	
	HPE Smart Array Controllers	
	HP Smart Array P440/4GB FBWC 12Gb 1-port Int FIO SAS Controller	761872-B21
	NOTE: Includes 96W Smart Storage Battery.	
	NOTE: P440 needs to be populated in slot 2 (Full Height).	
	HPE Smart Host Bus Adapters	
	HP H240 12Gb 2-ports Int FIO Smart Host Bus Adapter	761873-B21
	NOTE: H240 needs to be populated in slot 2 (Full Height).	
	HPE Cable Options	
	HPE DL20 Gen9 2LFF Mini SAS P440 Cable Kit	811279-B21
BIOS Mode	HPE DL20 Gen9 4SFF Mini SAS P440 Cable Kit	811282-B21
	NOTE: One of the above cables is required to be selected depending on the combination of the server and storage controller. Cable option kit descriptions include the right server and storage controller names.	
	HP Legacy FIO Mode Setting	758959-B22
	NOTE: If B140i is the only controller, then this option cannot be selected.	
Controller State	HP Mfg FIO Enable HBA Mode Setting	792962-B21
	NOTE: If H240 is the primary controller with this option then RAID is not allowed.	
	HP AHCI-Enable FIO Setting	801845-B21
HPE Insight Software	NOTE: If B140i is the primary controller with this option then RAID is not allowed.	
	HP Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle Single Server FIO License	C6N36A
HPE Security Kit	HPE DL20 Gen9 Quick Release Ear FIO Kit	811254-B21
	NOTE: HPE ProLiant DL20 Gen9 ships with thumbscrew ear attachments as standard. The Quick Release Ear kit needs to be purchased if you want to have a security bezel installed.	

Step 4: Choose Additional Options for Factory Integration from Core and Additional Options sections below

CAUTION: Please refer to your installation instructions for proper tools and number of people to use for any installation. Hewlett Packard Enterprise recommends that a minimum of two people are required for all Rack Server installations.

Core Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for additional information.

HPE Unique Options	HPE DL20 Gen9 2LFF Mini SAS P440 Cable Kit	811279-B21
	NOTE: This cable kit is required to support P440 controller on 2LFF model.	
	HPE DL20 Gen9 4SFF Mini SAS P440 Cable Kit	811282-B21
	NOTE: This cable kit is required to support P440 controller on 4SFF model.	
	HPE DL20 Gen9 Smart Storage Battery Holder	822451-B21
	NOTE: This holder is required to install the HPE Smart Storage battery (727258-B21) on P440 controller with FBWC (820834-B21, 726821-B21).	
	HPE DL20 Gen9 Redundant Power Supply Backplane Cable Kit	820306-B21
	NOTE: It is mandatory to choose this back plane cable kit to support 828734-B21 or 775595-B21 Redundant Power Supply Input Module. This cable kit is required in instances of single or double 900W PSU unit.	
	HPE DL20 Gen9 M.2 RA and Optical Disk Drive Power Cable Kit	816284-B21
	NOTE: This cable kit is required to support M.2 and or ODD.	
	HPE DL20 Gen9 Flexible LOM Riser Kit	811259-B21
	NOTE: This option is required to upgrade to next generation networking capabilities like 10GbE.	
	HPE DL20 Gen9 GPU Enablement Kit	811271-B21
	NOTE: It is mandatory to choose the GPU enablement kit to support qualified GPU card.	

HPE Memory	Unbuffered DIMMs (UDIMMs)	
	NOTE: The following memory is supported by the E3-1200v6, i3-7000 and G4560 and G4600 processors only	
	HPE 8GB (1x8GB) Single Rank x8 DDR4-2400 CAS-17-17-17 Unbuffered Standard Memory Kit	862974-B21
	HPE 8GB (1x8GB) Single Rank x8 DDR4-2133 CAS-15-15-15 Unbuffered Standard Memory Kit	819880-B21
	HPE 16GB (1x16GB) Dual Rank x8 DDR4-2400 CAS-17-17-17 Unbuffered Standard Memory Kit	862976-B21
	NOTE: The following memory is supported by the E3-1200v5, i3-6000 and G4500 and G4400 processors only	
	HPE 16GB (1x16GB) Dual Rank x8 DDR4-2133 CAS-15-15-15 Unbuffered Standard Memory Kit	805671-B21
	NOTE: Depending on the processor selected these memory will run at 2133MHz.	

HPE Optical Drives	HPE 9.5mm SATA DVD-ROM Optical Drive	726536-B21
	HPE 9.5mm SATA DVD-RW Optical Drive	726537-B21

HPE Drives	SATA Non-Hot Plug LFF (3.5-inch) Midline (MDL) Drives	
	HPE 1TB SATA 6G Midline 7.2K LFF (3.5in) RW 1yr Wty HDD	801882-B21
	HPE 4TB SATA 6G Midline 7.2K LFF (3.5in) RW 1yr Wty HDD	801888-B21
	SATA Non-Hot Plug LFF (3.5-inch) Entry (ETY) Drives	
	HPE 1TB SATA 6G Entry 7.2K LFF (3.5in) RW 1yr Wty HDD	843266-B21

Core Options

NOTE: These Entry drives will have lower performance and workload rating in comparison to HPE enterprise drives.

SATA Hot Plug LFF (3.5-inch) Midline (MDL) Drives

HPE 1TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty HDD	861691-B21
HPE 4TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty Digitally Signed Firmware HDD	872491-B21
HPE 6TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty 512e HDD	861750-B21
HPE 8TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty 512e Digitally Signed Firmware HDD	819203-B21

SATA Hot Plug LFF (3.5-inch) Midline (MDL) Drives

HPE 2TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty Digitally Signed Firmware HDD	872489-B21
HPE 10TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty Helium 512e Digitally Signed Firmware HDD	857648-B21
HPE 12TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty Helium 512e Digitally Signed Firmware HDD	881785-B21

SAS Hot Plug SFF (2.5-inch) Enterprise (ENT) Drives

HPE 300GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	870753-B21
HPE 300GB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	872475-B21
HPE 600GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	870757-B21
HPE 600GB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	872477-B21
HPE 900GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	870759-B21
HPE 1.2TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	872479-B21
HPE 1.8TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD	872481-B21
HPE 2.4TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD	881457-B21

SAS Hot Plug SFF (2.5-inch) Enterprise (ENT) Drives

HPE 900GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD	870765-B21
--	------------

SAS Hot Plug LFF (3.5-inch) Midline (MDL) Drives

HPE 2TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty Digitally Signed Firmware HDD	872485-B21
HPE 4TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty Digitally Signed Firmware HDD	872487-B21
HPE 8TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty 512e Digitally Signed Firmware HDD	819201-B21
HPE 1TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty Digitally Signed Firmware HDD	846524-B21
HPE 6TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty Digitally Signed Firmware HDD	846514-B21
HPE 10TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty Helium 512e Digitally Signed Firmware HDD	857644-B21
HPE 12TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty Helium 512e Digitally Signed Firmware HDD	881779-B21

SATA Hot Plug SFF (2.5-inch) Midline (MDL) Drives

HPE 1TB SATA 6G Midline 7.2K SFF (2.5in) SC 1yr Wty Digitally Signed Firmware HDD	655710-B21
---	------------

6G SATA Hot Plug SFF (2.5-inch) SC 512e Drives

Core Options

HPE 2TB SATA 6G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e Digitally Signed Firmware HDD 765455-B21

SSD Selection

To streamline the configuration process for HPE ProLiant Gen9 servers and to provide the best product availability, HPE recommends SSDs from the list located here: <https://ssd.hpe.com/recommend>.

6G SATA Hot Plug SFF (2.5-inch) SC Mixed Use Solid State Drives

HPE 240GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	875483-B21
HPE 480GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872344-B21
HPE 480GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	875470-B21
HPE 960GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872348-B21
HPE 960GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	875474-B21
HPE 1.92TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872352-B21
HPE 1.92TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	875478-B21
HPE 240GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	880295-B21
HPE 480GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	877776-B21
HPE 1.92TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	877788-B21
HPE 480GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	P07922-B21
HPE 960GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	P07926-B21
HPE 1.92TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	P07930-B21

12G SAS Hot Plug SFF (2.5-inch) SC 512e Drives

HPE 1TB SAS 12G Midline 7.2K SFF (2.5in) SC 1yr Wty Digitally Signed Firmware HDD	832514-B21
HPE 2TB SAS 12G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e HDD	765466-B21
HPE 1TB SAS 12G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e Digitally Signed Firmware HDD	765464-B21

12G SAS Hot Plug SFF (2.5-inch) SC Read Intensive Solid State Drives

HPE 480GB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	875311-B21
HPE 960GB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872390-B21
HPE 960GB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	875313-B21
HPE 1.92TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872392-B21
HPE 1.92TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	875326-B21
HPE 3.84TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872394-B21
HPE 3.84TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	875330-B21
HPE 960GB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	P06584-B21
HPE 1.92TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	P06586-B21
HPE 3.84TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	P06588-B21
HPE 7.68TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	P06590-B21

Core Options

HPE 15.3TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	P06592-B21
12G SAS Hot Plug SFF (2.5-inch) SC Write Intensive Solid State Drives	
HPE 400GB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	873351-B21
HPE 800GB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	873355-B21
HPE 1.6TB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	873357-B21
12G SAS Hot Plug SFF (2.5-inch) SC Mixed Use Solid State Drives	
HPE 400GB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	873359-B21
HPE 400GB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872374-B21
HPE 800GB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	873363-B21
HPE 800GB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872376-B21
HPE 1.6TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	873365-B21
HPE 1.6TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872382-B21
HPE 3.2TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	873367-B21
HPE 3.2TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872386-B21
12G SAS Hot Plug SFF (3.5-inch) SC Mixed Use Solid State Drives	
HPE 800GB SAS 12G Mixed Use LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD	872378-B21
6G SATA Hot Plug LFF (3.5-inch) Mixed Use SCC Solid State Drives	
HPE 960GB SATA 6G Mixed Use LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD	872350-B21
HPE 1.92TB SATA 6G Mixed Use LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD	875480-B21
HPE 480GB SATA 6G Mixed Use LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD	872346-B21
HPE 960GB SATA 6G Mixed Use LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD	P03691-B21
HPE 1.92TB SATA 6G Mixed Use LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD	877790-B21
HPE 480GB SATA 6G Mixed Use LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD	P07924-B21
HPE 960GB SATA 6G Mixed Use LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD	P07928-B21
HPE 1.92TB SATA 6G Mixed Use LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD	P07932-B21
Mixed Use - 6G SATA - M.2 - Solid State Drives	
HPE 240GB SATA 6G Mixed Use M.2 2280 3yr Wty Digitally Signed Firmware SSD	875488-B21
HPE 480GB SATA 6G Mixed Use M.2 2280 3yr Wty Digitally Signed Firmware SSD	875490-B21
HPE 960GB SATA 6G Mixed Use M.2 2280 3yr Wty Digitally Signed Firmware SSD	875492-B21
6G SATA Hot Plug SFF (2.5-inch) SC Read Intensive Solid State Drives	
HPE 240GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	875503-B21
HPE 480GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	875509-B21

Core Options

HPE 960GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	875511-B21
HPE 1.92TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	875513-B21
HPE 240GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	877740-B21
HPE 480GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	877746-B21
HPE 480GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	868818-B21
HPE 960GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	868822-B21
HPE 960GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	877752-B21
HPE 1.92TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	868826-B21
HPE 7.68TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	870144-B21
6G SATA Hot Plug LFF (3.5-inch) SC Read Intensive Solid State Drives	
HPE 480GB SATA 6G Read Intensive LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD	877748-B21
HPE 960GB SATA 6G Read Intensive LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD	877754-B21
Read Intensive - 6G SATA - M.2 - Solid State Drives	
HPE 480GB SATA 6G Read Intensive M.2 2280 3yr Wty Digitally Signed Firmware SSD	875498-B21
HPE 960GB SATA 6G Read Intensive M.2 2280 3yr Wty Digitally Signed Firmware SSD	875500-B21
M.2 SSD	
HPE Universal SATA HHHL 3yr Wty M.2 Kit	878783-B21
HPE DL20 Gen9 M.2 RA and Optical Disk Drive Power Cable Kit	816284-B21
NOTE: 816284-B21 cable kit is a mandatory option required to support M.2 SSDs.	
NOTE: M.2 drives go in PCIe slot and use B140i SATA controller.	
Hard Drive Blank Kits	
HPE Large Form Factor Hard Drive Blank Kit	666986-B21
HPE Small Form Factor Hard Drive Blank Kit	666987-B21

HPE Networking

1 Gigabit Ethernet adapters

HPE Ethernet 1Gb 4-port 331T Adapter	647594-B21
NOTE: This networking card can NOT be selected with P440, H240, and P841. As an alternate solution the 4-port FlexibleLOM Adapter 629135-B21 can be chosen with P440, H240 or P841.	
HPE Ethernet 1Gb 4-port 366T Adapter	811546-B21
NOTE: This networking card can NOT be selected with P440, H240, and P841. As an alternate solution the 4-port FlexibleLOM Adapter 665240-B21 can be chosen with P440, H240 or P841.	
HPE PS1810-24G Switch	J9834A
1 Gigabit Ethernet adapters	
HPE Ethernet 1Gb 2-port 332T Adapter	615732-B21
HPE Ethernet 1Gb 2-port 361T Adapter	652497-B21

Core Options

10 Gigabit Ethernet adapters

HPE Ethernet 10Gb 2-port 530SFP Adapter	652503-B21
HPE Ethernet 10Gb 2-port 530T Adapter	656596-B21
HPE Ethernet 10Gb 2-port 546SFP+ Adapter	779793-B21
HPE Ethernet 10Gb 2-port 560SFP+ Adapter	665249-B21
HPE Ethernet 10Gb 2-port 561T Adapter	716591-B21

NOTE: A minimum of two Gigabytes (2 GB) of server memory is required per each adapter.**NOTE:** Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber-optic environments must be purchased separately.

FlexibleLOM Adapters

HPE Ethernet 1Gb 4-port 331FLR Adapter	629135-B22
HPE Ethernet 1Gb 4-port 366FLR Adapter	665240-B21
HPE FlexFabric 10Gb 2-port 533FLR-T Adapter	700759-B21
HPE FlexFabric 10Gb 2-port 534FLR-SFP+ Adapter	700751-B21
HPE FlexFabric 10Gb 4-port 536FLR-T Adapter	764302-B21
HPE Ethernet 10Gb 2-port 546FLR-SFP+ Adapter	779799-B21
HPE FlexFabric 10Gb 2-port 556FLR-SFP+ Adapter	727060-B21
HPE Ethernet 10Gb 2-port 560FLR-SFP+ Adapter	665243-B21
HPE Ethernet 10Gb 2-port 561FLR-T Adapter	700699-B21

Please see the related NIC QuickSpecs for Technical Specifications and additional

HPE I/O Expansion Options

HPE DL20 Gen9 Flexible LOM Riser Kit	811259-B21
HPE DL20 Gen9 GPU Enablement Kit	811271-B21

NOTE: It is mandatory to choose any of the above riser kit for CTO configurations.

HPE Power Supplies

Power Supplies - Redundant

HPE DL20 Gen9 Redundant Power Supply Backplane Cable Kit	820306-B21
--	------------

NOTE: This RPS backplane Cable kit is mandatory to be chosen along with 900W backplane.

HPE 900W Standard AC 240VDC Power Input Module	775595-B21
--	------------

NOTE: This part number can only be bought standalone and is for field integration only.

NOTE: Supports Gold-level efficiency (92%) with a standard C14 inlet connector. No support for HPE Power Discovery Services. Only compatible with select HPE ProLiant Gen9 Essential servers.

NOTE: HPE 900W Gold (Redundant) AC 240VDC Power Input Module (775595-B21/ 828734-B21) must be used with Power Backplane (814835-B21/828735-B21).

NOTE: Each Redundant Power Supply Backplane can support up to two (2) power input modules.

NOTE: DL20 Gen9 Backplane cable kit is a mandatory option with the backplane for DL20 Gen9.

NOTE: Redundant AC Power Input Modules do not share power. Redundant AC Power Input Module #1 is the primary AC Power Input Module. Redundant AC Power Input Module #2 is the backup AC Power Input Module.

Additional Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for additional information.

HPE Insight Software

HPE Insight Control

HPE Insight Control including 1yr 24x7 Technical Support and Updates 1-server LTU C6N27A

NOTE: Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single activation key.

NOTE: Customer will receive a license entitlement certificate. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7HPE Software Technical Support and Update Service

NOTE: Licenses ship without media. The HPE Insight Control Media Kit can be ordered separately, or can be downloaded at: [\[Redacted\]](#)

NOTE: For additional license options please see the [HPE Insight Control QuickSpecs](#).

Embedded Management

HPE iLO Advanced

HPE iLO Advanced 1-server License with 1yr Support on iLO Licensed Features 512485-B21

HPE iLO Advanced Flexible Quantity License with 1yr Support on iLO Licensed Features 512486-B21

HPE iLO Advanced AKA Tracking License with 1yr Support on iLO Licensed Features 512487-B21

HPE iLO Advanced 1-server License with 3yr Support on iLO Licensed Features BD505A

HPE iLO Advanced Flexible Quantity License with 3yr Support on iLO Licensed Features BD506A

HPE iLO Advanced AKA Tracking License with 3yr Support on iLO Licensed Features BD507A

HPE iLO Advanced Electronic License with 1yr Support on iLO Licensed Features E6U59ABE

HPE iLO Advanced Electronic License with 3yr Support on iLO Licensed Features E6U64ABE

HPE iLO Essentials

HPE iLO Essentials License with 3yr Support on iLO Licensed Features BD774A

HPE iLO Essentials License with 1yr Support on iLO Licensed Features BD775A

HPE iLO Essentials Electronic License with 3yr Support on iLO Licensed Features E6U61ABE

HPE iLO Essentials Electronic License with 1yr Support on iLO Licensed Features E6U62ABE

HPE Converged Infrastructure Management Software

HPE OneView Advanced (without HPE iLO Advanced)

HPE OneView w/o iLO including 3yr 24x7 Support 1-server LTU P8B24A

High Performance Clusters

HPE Cluster Management Utility

HPE Insight Cluster Management Utility 1yr 24x7 Flexible LTU QL803B

HPE Insight Cluster Management Utility 3yr 24x7 Flexible LTU BD476A

HPE Insight Cluster Management Utility Media BD477A

NOTE: For additional license kits please see the [HPE Insight Cluster Management Utility QuickSpecs](#).

HPE Security

HPE Trusted Platform Module 2.0 Kit 745823-B21

HPE Trusted Platform Module Option 488069-B21

Additional Options

HPE 1U Security Bezel Kit 664918-B21

NOTE: Quick Release Ear option kit (811254-B21) is mandatory for installing security bezel but may only be selected during the Factory Integration process.

HPE Storage Controllers

SAS Controllers

HPE Smart Array Controllers

HPE Smart Array P440/2GB FBWC 12Gb 1-port Int SAS Controller 820834-B21

NOTE: The option above includes 96W Smart Storage Battery.

HPE Smart Array P440/4GB FBWC 12Gb 1-port Int SAS Controller 726821-B21

NOTE: The option above requires a 96W Smart Storage Battery (P01366-B21).

HPE Smart Array P441/4GB FBWC 12Gb 2-ports Ext SAS Controller 726825-B21

HPE Smart Array P841/4GB FBWC 12Gb 4-ports Ext SAS Controller 726903-B21

NOTE: P440 needs to be populated in slot 2 (Full Height).

HPE Smart Host Bus Adapters

HPE H241 12Gb 2-ports Ext Smart Host Bus Adapter 726911-B21

HPE H240 12Gb 2-ports Int Smart Host Bus Adapter 726907-B21

HPE Cable Options

HPE DL20 Gen9 2LFF Mini SAS P440 Cable Kit 811279-B21

HPE DL20 Gen9 4SFF Mini SAS P440 Cable Kit 811282-B21

NOTE: One of the above cables is required to be selected depending on the combination of server and storage controller. Cable option kit descriptions include the right server and storage controller names.

NOTE: All server models include mini-SAS cables required to connect drives to embedded B140i SATA controller or HBA240 controller (HBA240 is optional).

Optional Software

HPE Smart Array SR SmartCache (Single Key/Single Server) LTU D7S26A

HPE Smart Array SR SmartCache (Single Key/Multiple Servers) LTU D7S27A

HPE Smart Array SR SmartCache (Single Key/Multiple Servers) E-LTU D7S27AAE

HPE Smart Array SR Secure Encryption (Data at Rest Encryption/per Server Entitlement) E-LTU Q2F26AAE

Optional Upgrades

HPE 96W Smart Storage Battery (up to 20 Devices) with 145mm Cable Kit P01366-B21

Battery Holder

HPE DL20 Gen9 Smart Storage Battery Holder 822451-B21

NOTE: This holder is mandatorily required with Smart Storage Battery.

HPE Tape Backup

NOTE: For the complete range of tape drives, autoloaders, libraries and media

For hardware and software compatibility of Hewlett Packard Enterprise tape backup

NOTE: For Internal drives to be connected to DL servers please make sure that you order rack mount kit as well.

Tape Drives

SAS Rack-Mount Tape Solutions

HPE StoreEver LTO-8 Ultrium 30750 External Tape Drive BC023A

HPE StoreEver MSL LTO-8 Ultrium 30750 FC Drive Upgrade Kit Q6Q67A

Additional Options

HPE StoreEver MSL LTO-8 Ultrium 30750 SAS Drive Upgrade Kit	Q6Q68A
HPE StoreEver LTO-7 Ultrium 15000 External Tape Drive	BB874A
HPE StoreEver MSL LTO-7 Ultrium 15000 SAS Drive Upgrade Kit	N7P37A
HPE StoreEver MSL LTO-7 Ultrium 15000 FC Drive Upgrade Kit	N7P36A
HPE StoreEver MSL LTO-6 Ultrium 6250 SAS Drive Upgrade Kit	C0H27A
HPE StoreEver MSL LTO-6 Ultrium 6250 Fibre Channel Drive Upgrade Kit	C0H28A
HPE StoreEver MSL LTO-5 Ultrium 3000 SAS Drive Upgrade Kit	BL540B
HPE DAT Autoloader	
HPE StoreEver 1/8 G2 LTO-8 Ultrium 30750 FC Tape Autoloader	Q6Q65A
HPE StoreEver 1/8 G2 LTO-8 Ultrium 30750 SAS Tape Autoloader	Q6Q66A
HPE StoreEver 1/8 G2 LTO-7 Ultrium 15000 SAS Tape Autoloader	N7P35A
HPE StoreEver 1/8 G2 LTO-7 Ultrium 15000 FC Tape Autoloader	N7P34A
HPE StoreEver 1/8 G2 LTO-5 Ultrium 3000 SAS Tape Autoloader	BL536B
MSL3040	
HPE StoreEver MSL3040 Scalable Library Base Module	Q6Q62A
HPE StoreEver MSL3040 Scalable Library Expansion Module	Q6Q63A
HPE StoreEver MSL3040 Scalable Library Base Module	Q6Q62B

HPE Disk Backup

HPE RDX Removable Disk Backup System

HPE RDX 4TB External Disk Backup System	Q2R33A
HPE RDX 3TB External Disk Backup System	P9L72A
HPE RDX 3TB Internal Disk Backup System	P9L71A
HPE RDX 2TB External Disk Backup System	E7X53B
HPE RDX 1TB External Disk Backup System	B7B69B
HPE RDX External Docking Station	C8S07B

NOTE: For the complete range of RDX drives and media

For hardware and software compatibility of Hewlett Packard Enterprise disk backup products see:

HPE Storage Options

Emulex Fibre Channel HBAs

HPE 82E 8Gb 2-port PCIe Fibre Channel Host Bus Adapter	AJ763B
HPE StoreFabric SN1100E 16Gb Dual Port Fibre Channel Host Bus Adapter	C8R39A

QLogic Fibre Channel HBAs

HPE 82Q 8Gb 2-port PCIe Fibre Channel Host Bus Adapter	AJ764A
HPE StoreFabric SN1000Q 16GB 2-port PCIe Fibre Channel Host Bus Adapter	QW972A

HPE Power Distribution Units (PDUs)

NOTE: Please see the [HPE Basic Power Distribution Units \(PDU\) QuickSpecs](#) for information on additional options and product specifications.

NOTE: Please see the [HPE Intelligent Power Distribution Unit \(PDU\) QuickSpecs](#) for information on additional options and product specifications.

Additional Options

HPE Rack Mount Consoles, KVM Switches, and Keyboards

NOTE: To learn more, please visit the [HPE ProLiant DL20 Gen9 Server](#)

HPE USB Keyboard and Mouse

HPE USB US Keyboard/Mouse Kit

631341-B21

Rail Kits

HPE 1U Short Friction Rail Kit

775612-B21

HPE Uninterruptible Power System (UPS)

NOTE: To learn more, please visit the [HPE Uninterruptible Power Systems \(UPS\) web page](#)

HPE USB and SD Options

HPE Enterprise Mainstream Flash Media Kits for Memory Cards

HPE 32GB microSD Flash Memory Card

700139-B21

HPE 8GB microSD Flash Memory Card

726116-B21

HPE 8GB microSD Flash USB Drive

737953-B21

HPE 8GB Dual microSD Flash USB Drive

741279-B21

HPE Support Services

Installation & Start-up Services

HPE Installation ML/DL Series 10 Service

U7WZ5E

HPE Startup ML/DL Series 10 Service

U7WZ7E

Foundation Care

HPE 3 year Foundation Care Next business day DL20 Gen9 Service

H1AH3E

HPE 3 year Foundation Care Next business day with DMR DL20 Gen9 Service

H1AH4E

HPE 3 year Foundation Care 24x7 DL20 Gen9 Service

H1AH9E

HPE 3 year Foundation Care 24x7 with DMR DL20 Gen9 Service

H1AJ0E

HPE 3 year Foundation Care 24x7 with CDMR DL20 Gen9 Service

H1AP0E

HPE 3 year Foundation Care Next business day with CDMR DL20 Gen9 Service

H1AN7E

Proactive Care

HPE 3 year Proactive Care 24x7 DL20 Gen9 Service

H1AJ1E

HPE 3 year Proactive Care 24x7 with DMR DL20 Gen9 Service

H1AJ2E

HPE 3 year Proactive Care 24x7 with CDMR DL20 Gen9 Service

H1AP1E

Memory

HPE Standard Memory UDIMMs has passed the rigorous Hewlett Packard Enterprise qualification and testing processes. The memory subsystem in this server supports UDIMMs. The server supports single-rank and dual-rank DDR4 UDIMMs operating at up to 2133 MHz DIMM speeds.

Memory Population guidelines The server supports two channels per processor with two DIMMs per channel for a total of four DIMMs per DL20 Gen9 Server.

General Memory Population Rules and Guidelines:

- Only UDIMMs are supported on DL20 Gen9. No support for RDIMMs and LRDIMMs.
- All the channels in a system run at the fastest common frequency.
- Both single DIMM per channel and dual DIMMs per channel are supported at 2133MHz.

Intel Gen9 Supported Memory Bandwidth for HPE ProLiant Gen9 Intel® Xeon® E3-1200v5 Series Processor Family

Memory Bandwidth and Capacity				
[DIMM Type]	Unbuffered with ECC DIMMs (UDIMMs)			
HPE SKU P/N	805667-B21	819880-B21	805669-B21	805671-B21
DIMM Rank	Single Rank	Single Rank	Dual Rank	Dual Rank
DIMM Capacity	4GB	8GB	8GB	16GB
Voltage	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V
DIMM Native Speed (MT/s)	2133	2133	2133	2133
SLOTS THAT CAN BE POPULATED				
4 slot servers	4	4	4	4
MAXIMUM CAPACITY (GB)				
	16	32	32	64
POPULATED DIMM SPEED (MT/s)				
1 DIMM Per Channel	2133	2133	2133	2133
2 DIMM Per Channel	2133	2133	2133	2133
3 DIMM Per Channel		n/a		

Memory

Intel Gen9 Supported Memory Bandwidth for HPE ProLiant Gen9 Intel® Xeon® E3-1200v6 Series Processor Family

[DIMM Type]	Unbuffered with ECC DIMMs (UDIMMs)	
HPE SKU P/N	862974-B21	862976-B21
DIMM Rank	Single Rank	Dual Rank
DIMM Capacity	8GB	16GB
Voltage	Std Voltage 1.2V	Std Voltage 1.2V
DIMM Native Speed (MT/s)	2400	2400
SLOTS THAT CAN BE POPULATED		
4 slot servers	4	4
MAXIMUM CAPACITY (GB)		
	32	64
POPULATED DIMM SPEED (MT/s)		
1 DIMM Per Channel	2400	2400
2 DIMM Per Channel	2400	2400
3 DIMM Per Channel	n/a	n/a

DIMM slot and configuration diagram

UDIMM maximum configuration (1 CPU model)
Population order; start with "A" first, "B" second, "C" third, etc.

CPU 1		
	Slot #	Population order
Chnl 2	1	B
	2	D
CPU 1		
	Slot #	Population order
Chnl 1	3	A
	4	C

Memory


Memory Speed by Processor Model	Processor Models	Supported Memory Speeds
	E3-1220v5, E3-1225v5, E3-1230v5, E3-1240v5, E3-1270v5, E3-1280v5, E3-1260Lv5, E3-1240Lv5, i3-6100, i3-6300, G4500, G4400	2133MT/s
	E3-1220v6, E3-1225v6, E3-1230v6, E3-1240v6, E3-1270v6, E3-1280v6, i3-7100, i3-7300, G4560, G4600	2400MT/s

Standard and Maximum Memory Capacity (Pre-configured Models)	Pre-Configured Models	Standard Memory	Maximum Memory Plus Optional Memory	Standard Memory Replaced with Optional Memory
	G4400	4GB (1x4GB)	52GB (3x16GB, 1x4GB)	64GB (4x16GB)
	E3-1240v5	8GB (1x8GB)	56GB (3x16GB, 1x8GB)	64GB (4x16GB)
	E3-1220v5	8GB (1x8GB)	56GB (3x16GB, 1x8GB)	64GB (4x16GB)
	G4560	8GB (1x8GB)	56GB (3x16GB, 1x8GB)	64GB (4x16GB)
	E3-1220v6	8GB (1x8GB)	56GB (3x16GB, 1x8GB)	64GB (4x16GB)
	E3-1240v6	16GB (1x16GB)	64GB (4x16GB)	64GB (4x16GB)

DDR4 memory options part number decoder

NOTE: Capacity references are rounded to the common gigabyte (GB) values.

- 4GB = 4,096MB
- 8GB = 8,192MB
- 16GB = 16,384MB



Storage



1-4 4 x SFF SATA/SAS/SSD Hot Pluggable Hard Drive Bays



1-2 2 x LFF SATA/SAS/SSD Hot Pluggable and Non hot Pluggable Hard Drives Bays



1-2 2 x LFF SATA Non hot Pluggable Hard Drives Bays



Technical Specifications

System Unit	Dimensions (H x W x D)	4 SFF - 1.70 x 17.11 x 15.05 inches (4.32 x 43.46 x 38.22 cm) 2 LFF - 1.70 x 17.11 x 15.05 inches (4.32 x 43.46 x 38.22 cm)
	Weight (approximate)	Non hot Plug 2 LFF fully loaded 17.37lb (7.88kg) (all hard drives, power supplies, and processors installed) Hot Plug 2LFF fully loaded 17.41lb (7.9kg) (one hard drive, power supply, and processor installed)
290W Non-hot Plug Power Supply		
Input Requirements	Range Input Voltage	100 to 240 VAC
	Rated Input Current	5.5 A max (at 100 VAC)
	Rated Input Frequency	50 to 60 Hz
	Rated Input Power	550 W (at 100 VAC)
BTU Rating	Maximum	1130 BTU per hr (at 115 VAC)
		1126 BTU per hr (at 230 VAC)
Power Specifications	To review typical system power ratings use the Power Advisor which is available via the online tool located at [redacted] -Click on the system of interest in the list of configurations of the next screens.	
Power Supply Output	Rated Steady-State Power	290 W Max
	Maximum Peak Power	366 W within 10 seconds
900W Redundant Power Supply		
Input Requirements	Rated Input Voltage	100 to 127 VAC
		200 to 240VAC
	Rated Input Frequency	50 to 60 Hz
	Rated Input Current	6.3 A at 100 V AC
		4.9 A at 200 V AC
	Maximum rated input power	619 W at 100 VAC
		976 W at 200 VAC
	BTUs per hour non redundant	2112 at 100 VAC
		3329 at 200 VAC
Power Specifications	To review typical system power ratings use the Power Advisor which is available via the online tool located at [redacted] - Click on the system of interest. Example: DL20 Gen9- Follow the instructions of the next screens.	
Power Supply Output	Rated Steady-State Power	550 W at 100 VAC to 127 VAC input 900 W at 200 VAC to 240 VAC input
	Maximum Peak Power	550 W at 100 VAC to 127 VAC input 900 W at 200 VAC to 240 VAC input

Technical Specifications

System Inlet Temperature	Standard Operating Support	10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 20°C/hr (36°F/hr). The upper limit and rate of change may be limited by the type and number of options installed. System performance during standard operating support may be reduced if operating with a fan fault or above 30°C (86°F).
	Extended Ambient Operating Support	For approved hardware configurations, the supported system inlet range is extended to be: 5° to 10°C (41° to 50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: System performance may be reduced if operating in the extended ambient operating range or with a fan fault. NOTE: Supports A3 extended ambient.
Relative Humidity	Non-operating	-30°C to 65°C (-22°F to 149°F)
	Operating	Minimum to be the higher (more moisture) of -12°C (10.4°F) dew point or 8% relative humidity. Maximum to be the lower (less moisture) of 24°C (75.2°F) dew point or 90% relative humidity.
(non-condensing)	Non-operating	5% to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature.
Altitude	Operating	3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).
	Non-operating	9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min).
Acoustic Noise		Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109).
Idle		
LWAd		Entry 3.7 B Base 3.8 B Performance 3.4B
LpAm		Entry 20.0 dBA Base 20.0 dBA

Technical Specifications

Emissions Classification (EMC)	Operating	Performance 18.0 dBA
	LWAd	Entry 3.7 B
		Base 4.7 B
		Performance 5.6 B
	LpAm	Entry 20.0 dBA
		Base 30.0 dBA
		Performance 34.0 dBA
	FCC Rating	Class A
	Normative Standards	CISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15; ICES-003; CNS13438; GB9254; K22;K24; EN 61000-3-2; EN 61000-3-3; EN 60950-1; IEC 60950-1
	NOTE: Product conformance to cited product specifications is based on sample (type) testing, evaluation, or assessment. This product or family of products is eligible to bear the appropriate compliance logos and statements.	
NOTE: The Listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels.		
NOTE: The above power supply also supports 240VDC.		
HPE Dynamic Smart Array B140i Controller	Number of PCI links	Four
	PCI link rate	4Gb/s
	Storage protocol support	SATA
	SAS/SATA peak data transfer rate	6Gb/s
	Number of SAS/SATA links	10 links
	SAS/SATA connectivity	2x4 connectors; 2x1 connectors
	Expander support	No
	Drives supported (max)	Up to 10 Internal Drives
	RAID support	0, 1, 10, 5 SATA
	Software management	HPE SSA, SMH, SIM
	Warranty	Server warranty
	HPE Secure Encryption license	Not Supported
	HPE SmartCache License	Not Supported
	HPE Smart Storage Administrator	Supported
HPE Ethernet 1Gb 2-port 332i Adapter	Network Interface	10Base-T/100Base-TX/1000Base-TX
	Compatibility	IEEE 802.3 10Base-T
		IEEE 802.3ab 1000Base-T
		IEEE 802.3u 100Base-TX
		Energy Efficient Ethernet (EEE) compliant with IEEE Std 802.3az (default is disabled)

Technical Specifications

Data Transfer Method	PCI Express, two lanes (x2)	
Controller	BCM5720	
Network Transfer Rate	10Base-T (Half-Duplex)	10 Mb/s per port, 20 Mb/s Combined
	10Base-T (Full-Duplex)	20 Mb/s per port, 40 Mb/s Combined
	100Base-TX (Half-Duplex)	100 Mb/s per port, 200 Mb/s Combined
	100Base-TX (Full-Duplex)	200 Mb/s per port, 400 Mb/s Combined
	1000Base-TX (Half-Duplex)	1000 Mb/s per port, 2000 Mb/s Combined
	1000Base-TX (Full-Duplex)	2000 Mb/s per port, 4000 Mb/s Combined
Connector	Four RJ-45	
Cable Support	10 Base-T	Categories 3, 4 or 5 UTP; up to 328 ft (100 m)
	10/100/1000 Base-TX	Category 5 or higher UTP; up to 328 ft (100 m)

Environment-friendly Products and Approach -End-of-life Management and Recycling

Hewlett Packard Enterprise offers end-of-life product return, trade-in, and recycling programs, in many geographic areas, for our products. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.


The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.

Summary of Changes

Date	Version History	Action	Description of Change
03-Dec-2018	Version 32	Changed	Core Option Section was updated
01-Oct-2018	Version 31	Changed	Core Options, Additional Options and Standard Features sections were updated.
06-Aug-2018	Version 30	Changed	Core Options and Additional Options were updated.
02-Jul-2018	Version 29	Changed	The Smart Buy models section was updated for the NA version.
07-May-2018	Version 28	Added	Added new SMB SKU Offering.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
02-Apr-2018	Version 27	Changed	SKU description were updated.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
04-Dec-2017	Version 26	Added	Added new HPE 12TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty Helium 512e Digitally Signed Firmware HDD.
16-Oct-2017	Version 25	Changed	Smart Buy models section was revised (NA version only).
25-Sep-2017	Version 24	Added	New SSD offering was added to the HPE Drives section. Added new Storage options.
		Changed	Core Options and Additional Options were revised.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
04-Sep-2017	Version 23	Changed	Product descriptions were updated throughout the QuickSpecs.
07-Aug-2017	Version 22	Added	Added new Solid State Drives to the HPE Drives section.
11-Jul-2017	Version 21	Changed	Operating Systems and Virtualization Software Support for ProLiant Servers section was revised.
05-Jun-2017	Version 20	Added	Added new Solid State Drives to the HPE Drives section.
08-May-2017	Version 19	Added	New Intel Pentium Core i3 and E3-1200v6 processors were added. Added new 2400 MT/s UDIMMs. Added support for ClearOS. Added new Pre-Configured Models.
		Changed	Processor, Memory, Operating Systems and Virtualization Software Support for ProLiant Servers, and Graphics under Standard Features were revised. HPE Processors, HPE Memory, HPE Drives, HPE Computation and Graphics Accelerators, HPE Data Center Racks, and Memory were revised.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
03-Apr-2017	Version 18	Changed	HPE Processors section was revised.
27-Mar-2017	Version 17	Added	Added new Hard Drives.
17-Feb-2017	Version 16	Changed	HPE Memory section under Core Options was revised.
13-Feb-2017	Version 15	Added	Added new HDD and SSD offering to the HPE Drives section.
09-Dec-2016	Version 14	Changed	Smart Buy models section in the NA version was revised.
28-Nov-2016	Version 13	Added	Added new Hard Drives offering. Added new M2000 GPU option.
		Changed	Maximum Internal Storage, Graphics, HPE Computation and Graphics Accelerators, and HPE Disk Backup were revised.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
28-Oct-2016	Version 12	Removed	Obsolete Hard Drives were removed from the QuickSpecs.
26-Sep-2016	Version 11	Added	Added new LFF 10TB SATA drives offering.
		Changed	Maximum Internal Storage and Pre-configured Models were revised.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
15-Aug-2016	Version 10	Changed	HPE Networking section was revised.
		Removed	Obsolete SKUs were removed from the QuickSpecs.

Summary of Changes

10-Jun-2016	Version 9	Removed	HPE Dual 32GB microSD Enterprise Midline USB Kit was removed from the QuickSpecs.
06-Jun-2016	Version 8	Added	Added new HDD offering to the HPE Drives section.
		Changed	HPE Networking, HPE Converged Infrastructure Management Software, and HPE Disk Backup were revised.
06-May-2016	Version 7	Changed	Energy Star certification in Pre-Configured Models section was revised.
08-Apr-2016	Version 6	Changed	HPE Processors section was revised.
31-Mar-2016	Version 5	Added	Added new HPE Non-hot Plug Entry drives and Hot plug standard drives. Added new 8Gb and 16Gb Fiber Channel HBA support. Added new TPM 2.0 security module.
		Changed	Maximum Internal Storage, Graphics, Embedded Management, Security, Service and Support, Pre-configured Models, Power Supplies, and Storage Options sections were revised.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
16-Feb-2016	Version 4	Added	New HDD offering was added to HPE Drives.
		Changed	HPE Data Center Racks, HPE Power Distribution Units (PDUs), and HPE Uninterruptible Power Systems (UPS) were revised.
12-Jan-2016	Version 3	Changed	Upgradeability and HPE Power Supplies were revised.
17-Dec-2015	Version 2	Added	Smart Buy models were added to the NA version.
		Changed	Power Supply, Upgradeability, and Technical Specifications were revised.
01-Dec-2015	Version 1	New	New QuickSpecs.



© Copyright 2018 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Intel® and Xeon® are registered trademarks of Intel Corporation in the U.S. and other countries. Microsoft®, Windows®, and Windows Server® are U.S. registered trademarks of the Microsoft group of companies.
For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less

c04834960 - 15474 – North America - V32 - 3-December-2018





HPE ProLiant DL20 Gen9 Server

Compact, versatile, and efficient



Is the HPE DL20 Gen9 Server right for my business?

This compact 1P server with enterprise-class capabilities is a great fit for:

- **Small- to medium-sized businesses and enterprises**—This compact single-socket rack server delivers performance, data protection, and ease-of-use suitable for most small- to medium-sized workloads—all in an install-anywhere compact form factor and a competitive price point. You can also select from a wide range of HPE Qualified Options, allowing you to leverage expandability and reliability features.
- **Tier 2 and 3 service providers**—ProLiant DL20 Gen9 Servers make it possible for you to scale out quickly and affordably to respond to changing business needs. The rack now provides cheaper drive options for environments that call for an affordable solution that can be easily ripped and replaced.

An ideal fit for small- to medium-sized businesses, enterprises, and service providers

The dense and compact HPE ProLiant DL20 Gen9 Server, powered by the latest Intel® Xeon®, Intel Core™ i3, and Pentium® processors, blends enterprise-class capabilities with great value. Outstanding configuration flexibility caters to a wide variety of requirements at an affordable price point—making it an ideal platform for small- to medium-sized businesses, service providers, and enterprises running IT infrastructure workload, Web, or edge-of-network applications in space-constrained environments. The DL20 Gen9 Server offers a range of HPE Qualified Options—from drives to power supplies to storage controllers to HPE FlexibleLOM for next-generation network capability for faster data transfer—helping you find the right configuration and just the right price.

Data protection, ease of use, reliability, and performance

The server's data protection features include optional redundant power supplies, DDR4 memory, enhanced error handling, HPE Smart Array RAID mirroring and striping capabilities, and flash-backed write cache (FBWC) up to 4 GB. FBWC protects data by capturing and holding it indefinitely in the event of a power loss, equipment failure, human error, or virus attacks. Layering on business continuity features, the HPE Insight Online option with HPE Insight Remote Support provides 24x7 remote monitoring and anywhere, anytime access to your IT and support status to get your business up and running quickly if something goes wrong.

The server also features extreme ease of use, starting with a short depth chassis for ease of deployment and mobility. Embedded HPE iLO4 management provides easy-to-use tools for deploying, managing, and troubleshooting servers—ideal for those with limited IT resources. A wide choice of Intel processors with up to 64 GB of DDR4 ECC memory helps you handle a variety of workload demands. And the latest ProLiant DL20 Gen9 Servers, powered by Intel Xeon processors, consume up to 29 percent less power,¹ which, combined with the efficient redundant power supply option,² provides you with an ENERGY STAR®-certified power saving solution.

¹ Compared to the previous generation

² RPS option available only on SFF chassis

Technical specifications

In the following table, bold text denotes new features or functions, as compared to the HPE ProLiant DL320e Gen8 v2 Server.

HPE ProLiant DL20 Gen9 SERVER	
Compute	Choose from one Intel Xeon E3-1200 v5 Series , 4-core; one Intel Pentium, 2-core; or one Intel Core i3, 2-core PCIe 3.0, Up to 2 PCIe 3.0 slots
Memory	4 x DDR4 , up to 2133 MHz (64 GB max)
Storage	HPE Dynamic Smart Array B140i, HPE Smart Array Controller P440 with FBWC, and HPE Smart HBA H240
HPE SmartDrives	2LFF Non hot-Plug & Hot Plug (SAS/SATA); 4SFF Hot Plug (SAS/SATA)
Networking	2 x 1GbE embedded Ethernet Adapter and FlexibleLOM
VGA/serial/USB ports/SD	2 rear USB 3.0, 2 front USB 2.0, and 1 internal USB 3.0
GPU support	One single-width, half-length GPU (optional)
On-premise management	HPE iLO 4 (Advanced/Scale-out/Essentials Optional)
On-cloud management	HPE Insight Online with enhanced mobile application
On-system management	HPE iLO 4, HPE Intelligent Provisioning, HPE System Update Manager (SUM), HPE RESTful Interface Tool
Power and cooling	Standard 290 W power supply; 900 W AC 240VDC redundant power supply (optional for SFF chassis only)
Industry compliance	ASHRAE A3, ENERGY STAR (only on RPS configuration models)*
Form factor/chassis depth	Rack (1U) 15.05" (ear to rear)
Warranty (parts/labor/onsite)	1/1/1
System ROM	UEFI and Legacy BIOS

* ENERGY STAR certification to be available latest by February 2016.

Hewlett Packard Enterprise Services

Let Hewlett Packard Enterprise help guide you to the New Style of Business. HPE Technology Services delivers confidence, reduces risk, and helps you realize greater agility and stability.

- Our consulting services provide advice and guidance to safely move your workloads to newer technologies.
- HPE implementation and installation services enable faster, more reliable startup of your new ProLiant Gen9 servers, and our support portfolio allows you to get connected and back to business fast.
- We recommend HPE Proactive Care for ProLiant Gen9 servers to prevent issues and resolve problems quickly and efficiently.
- HPE Foundation Care provides a choice of coverage levels and response times for hardware and software support.
- HPE Datacenter Care enables you to operate and evolve your IT environment at a lower cost and with more agility, including our Flexible Capacity Service to acquire IT without impacting capital budget.
- Our support technology lets you tap into the knowledge of millions of devices and thousands of experts to stay informed and in control, anywhere, any time.



Sign up for updates

★ Rate this document



© Copyright 2015–2016 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

ENERGY STAR is a registered mark owned by the U.S. government. Intel Xeon, Pentium, and Intel Core are trademarks of Intel Corporation in the U.S. and other countries. SD is a trademark or registered trademark of SD-3C in the United States and other countries or both.

4AA6-2663ENW, January 2016, Rev. 1

Nabídka ZAK-2019-00472

Číslo dokladu: ZAK-2019-00472

Referent: [REDACTED]

Datum: 28.5.2019

Datum platnosti: 11.6.2019

Dodavatel:

Comes spol. s r. o.Třebohostická 2283/2
100 00 Praha 10

Sídlo: Vejvanovského 1615, 149 00 Praha 11, Chodov

IČ: 17047561, DIČ: CZ17047561

Zapsán v obch. rejstříku vedeném Krajským
obchodním soudem v Praze, oddíl C, vložka 2016

Odběratel:

Město SlanýVelvarská 136/1
274 01 Slaný, Kladno

IČ: 00234877, DIČ: CZ00234877

Platební údaje:

Způsob úhrady: Bankovním převodem

Požadovaná záloha: 0,00 Kč

Úrok: 0,1

Splatnost dní: 30

Měna: CZK

Obchodní údaje:

Doprava:

3.2 Záložní napájecí zdroj UPS

Produkt Popis	Záruka	Množství	Cena za jedn.	Cena bez DPH	DPH	Cena celkem
768539	Záruka 24 měsíců					
Eaton 5SC 1500i Rack 2U, UPS 1500VA / 1050W, 8 zásuvek IEC, LCD (Runtime 35minut - 268W)		1 Ks	15 407,70	15 407,70 21%	3 235,62	18 643,32
149010	Záruka 24 měsíců					
Eaton Komunikační karta MS Web/SNMP Gigabit (pro 5P, 5PX, 9PX, 9SX, 93PS, 93PM, 93E)		1 Ks	5 589,10	5 589,10 21%	1 173,71	6 762,81
Celkem:		2 mj		20 996,80	4 409,33	25 406,13

Vystavil:

Strana 1 z 1

5P1550iR


Eaton 5P 1550i VA 1U do stojanu

Všeobecné

Topologie	Interaktivní vysokofrekvenční (čistá sinusoida na výstupu, booster + reduktor)
Konfigurace	Montáž do stojanu, výška 1U
Typové číslo	5P1550iR
Zátěž (VA/W)	1550/1100
Rozměry V x Š x H, mm	43,2 x 438 x 564
Hmotnost kg	19,4
Záruční podmínky	3 roky na elektroniku, 2 roky na baterie
Obsah dodávky (dodává se s následujícími položkami)	1 UPS 2 IEC výstupní síťové šňůry 2 úchyty pro montáž do 19" stojanu nebo na stěnu 2 univerzální ližiny systém upevnění kabelových svazků CD se sadou programů Eaton Intelligent Power USB kabel Sériový kabel Bezpečnostní pokyny Návod Quick Start CD s uživatelskou příručkou v 10 jazycích

Vstupní

Připojení vstupu (1) IEC-320-C14



Rozsah vstupního napětí bez nutnosti použít baterie 180V – 294V (nastavitelné na 160V-294V)

Rozsah vstupního kmitočtu bez nutnosti použít baterie 47 až 70Hz (50Hz systém), 56,5 až 70Hz (60Hz systém), 40Hz v režimu se sníženou citlivostí

Výstupní

Napětí 230V (+6/-10%) (Nastavitelné na 200V / 208V / 220V ů 230V / 240V)

Výstupní zásuvky (8) IEC-320-C13



Dálkově ovládané zásuvky 2 skupiny, každá 2x IEC C13 (10A)

Výstupní kmitočet 50/60Hz +/- 0,1% (automatická detekce)

Baterie

Load (Watts): 268
Standard Runtime: 35

Load (Watts)

Battery runtimes are approximate and may vary with equipment, configuration, battery age, temperature, etc.
Actual runtime may vary from +/- 15% around these typical values

Nabídka ZAK-2019-00463

Číslo dokladu: ZAK-2019-00463

Referent: [REDACTED]

Datum:

27.5.2019

Datum platnosti:

10.6.2019

Dodavatel:**Comes spol. s r. o.**Třebostická 2283/2
100 00 Praha 10

Sídlo: Vejvanovského 1615, 149 00 Praha 11, Chodov

IČ: 17047561, DIČ: CZ17047561

Zapsán v obch. rejstříku vedeném Krajským
obchodním soudem v Praze, oddíl C, vložka 2016Odběratel:**Město Slaný**Velvarská 136/1
274 01 Slaný, Kladno

IČ: 00234877, DIČ: CZ00234877

Platební údaje:

Způsob úhrady: Bankovním převodem

Požadovaná záloha: 0,00 Kč

Úrok: 0,1

Splatnost dní: 30

Měna: CZK

Obchodní údaje:

Doprava:

3.4 Klientské licence Kerio Connect

Produkt Popis	Záruka	Množství	Cena za jedn.	Cena bez DPH	DPH	Cena celkem
Kerio Connect 150 users + ActiveSync + 1 rok Software Maintenance		1 Ks	69 778,00	69 778,00 21%	14 653,38	84 431,38
9005-121-03						
Instalace a konfigurace Kerio Connect		1 j	7 490,00	7 490,00 21%	1 572,90	9 062,90
9005-104-00						
Migrace MailServeru 6.0 Kerio Connect		1 j	1 980,00	1 980,00 21%	415,80	2 395,80
Instalace a konfigurace Kerio Connect - uživatelského účtu, zaškolení obsluhy		12 hod	990,00	11 880,00 21%	2 494,80	14 374,80
Roční Software Maintenance od následujícího roku - 4 roky		1 Ks	114 820,00	114 820,00 21%	24 112,20	138 932,20
Celkem:		16 mj		205 948,00	43 249,08	249 197,08

[REDACTED]
Vystavil:

Strana 1 z 1




V porovnání s jinými řešeními vám poskytneme e-mail, kalendáře, kontakty a Instant Messaging mnohem jednodušeji a za zlomek nákladů.

Kerio Connect je řešení pro messaging a spolupráci, které vyhovuje potřebám malých a středních firem a nabízí širokou škálu vlastností. Uživatelé mohou používat své oblíbené e-mailové klienty a získají též snadný přístup k poště přes intuitivní webové rozhraní. Kerio Connect je vysoce stabilní. Můžete se soustředit na svou obchodní činnost namísto neočekávaných výpadků.

- ✓ **Multiplatformní podpora** nejrozličnějších e-mailových klientů zajistí uživatelům požadovanou flexibilitu.
- ✓ **Ochrana uživatelů** e-mailu a sítě prostřednictvím bezpečnostních funkcí, jako je šifrování SSL, S/MIME a efektivních antivirových a antispamových nástrojů.
- ✓ **Intuitivní správa** kdykoli a odkudkoli prostřednictvím webového administračního rozhraní Kerio Connect.
- ✓ **Rychlé nasazení** v jakémkoli IT prostředí – v cloudu, ve firmě nebo ve virtuálním prostředí.
- ✓ **Zabezpečená podpora** široké škály mobilních zařízení – od telefonů iPhone a zařízení se systémem Android až po tablety.


Podpora různých platforem

- Podpora široké řady messagingových aplikací zajistí uživatelům požadovanou flexibilitu.
- Prostřednictvím Kerio Connect Client a vašeho oblíbeného prohlížeče uvidíte dostupnost svých kolegů, můžete chatovat v reálném čase, plánovat schůzky a posílat bohatě formátované e-maily.
- Desktopová aplikace Kerio Connect pro Mac a Windows.
- Plná podpora pro Outlook (Windows a Mac), nativní aplikace na Mac a veškeré e-mailové klienty založené na IMAP a POP.
- Koncoví uživatelé si pomocí nástrojů pro automatickou konfiguraci mohou Kerio Connect nastavit sami.

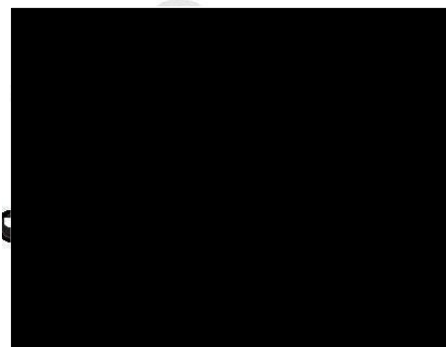



Ochrana uživatelů a sítě pomocí integrovaných bezpečnostních funkcí

- Efektivní zabezpečení prostřednictvím šifrování SSL a S/MIME.
- Ochrana proti nevyžádané poště se skládá z několika vrstev a zajistí tak, že vaše poštovní schránka nebude zahlcena nechtěnými zprávami.
- Ochrana sítě před viry, trojskými koňmi, červy, spywarem a adwarem. Minimalizace dopadů na paměť a výkon systému pomocí Kerio Antivirus.
- Blokování IP adres při podezření, že dochází k útokům s cílem uhádnout hesla. Blokování účtů, které se staly cílem těchto útoků. Možnost neblokovat pokusy z lokální sítě.
- Ověřování pokusů o přihlášení mezi klientem a serverem či mezi servery pomocí protokolu Kerberos.
- Ochrana před útoky hackerů a jinou škodlivou činností obcházející firewall prostřednictvím automatického filtrování a zakázáním podezřelých příloh.

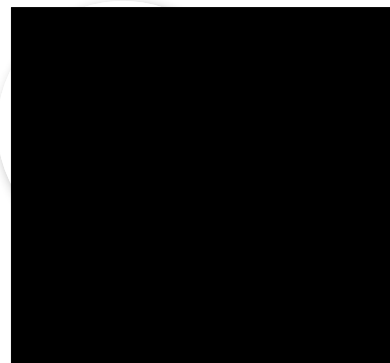

Snadná a efektivní správa e-mailů, kalendářů a dalších důležitých funkcí

- Využívejte [MyKerio](#) a spravujte veškerá nasazení Kerio Connect prostřednictvím centralizovaného webového rozhraní, které vám poskytne souhrnné systémové informace, automatické zálohování konfigurace, monitorování stavu, systémové notifikace a úplnou vzdálenou konfiguraci.
- Plné nebo diferenciální zálohování na vyžádání či v rámci plánu. Zálohovat můžete data i konfiguraci serveru, aniž by došlo k výpadku.
- Odstupňovaná oprávnění pro správu a řízení serveru, veřejných a archivních složek.
- Podrobné logy, reporty a statistiky využívání.
- Integrace s oblíbenými adresářovými službami jako jsou Apple Open Directory a Microsoft Active Directory.




Rychlé nasazení v jakémkoli IT prostředí

- Systém lze nasadit na jeden hardware společně s jinými podnikovými aplikacemi a také na oblíbených virtuálních platformách jako je VMware a Hyper-V.
- Software Kerio Connect můžete nainstalovat na stávající hardware – podporuje totiž většinu verzí systémů Windows, Linux a Mac OS X.
- Kerio Connect můžete také získat ve formě Kerio Cloud či průběžně placené hostované služby zajišťované autorizovanými poskytovateli hostingu Kerio Connect.
- Kerio Connect lze integrovat do stávajících IT systémů. Uživatelé tak získávají prvotřídní služby jak v kanceláři, tak i na cestách.
- Díky bezplatným nástrojům pro migraci je přechod z Exchange, IMAP či jakéhokoli jiného prostředí rychlý a snadný.

Možnost bez problémů používat vlastní mobilní zařízení, které si zaměstnanci vyberou

- Prostřednictvím protokolů Exchange ActiveSync nebo IMAP/CalDAV/CardDAV zajišťuje Kerio Connect podporu široké škály mobilních zařízení – od telefonů iPhone a zařízení se systémem Android až po nejrůznější tablety.
- Bezpečná komunikace přes protokoly SSL a S/MIME ochrání uživatele i na cestách.
- Koncoví uživatelé mohou konfigurovat vlastní mobilní zařízení, aniž by museli žádat o pomoc IT oddělení.
- Vzdálené vymazání dat z mobilních zařízení ochrání uživatele v případě, že se jim zařízení ztratí nebo je odcizeno.



Altaro Hyper-V Backup

Hyper-V Backup in 5 clicks - Hyper Easy, Hyper Fast, Hyper Effective

A powerful Hyper-V aware backup solution that easily backs up Microsoft Hyper-V Virtual Machines. Take the guesswork out of backing up Hyper-V, you won't find an easier to use or quicker to configure solution.



Fully Hyper-V Aware

Does all the complex config connections and allows you to back up any instance in 5 clicks or less.




Affordable & Full Featured

Only want to back up and restore one VM instead of the entire host? No problem, the power of choice is yours. Enterprise functionality at an SMB price.



Easy to Use & No Agents Needed

Easy and to the point. Install on Hyper-V Server without installing anything within the virtual machine itself.





ReverseDelta Incremental Technology

ReverseDelta is technology developed by Altaro Software that enables Altaro Hyper-V Backup to only save the changes between each version of a changed file, rather than storing the whole file every time it changes.

Most backup solutions keep the first backup and save the changes (deltas) since that first backup, which, after a few weeks or months can become much more complex to restore.

With ReverseDelta, the most recent backup is always a full file. This means that if you require the latest version of a file, it is possible to access it directly from your backup drive without having to rebuild it from delta files.



Altaro Hyper-V Backup

Hyper Easy, Hyper Fast, Hyper Effective

Licensing

Altaro Hyper-V Backup is licensed per the amount of VMs being backed up on each host. There are no CPU sockets fees. Altaro Hyper-V Backup comes in 2 different editions.

Editions

Altaro Hyper-V Backup comes in 2 different editions, Standard Edition and Unlimited Edition. The table below lists the differences between both editions. Apart from these differences both editions are the same.

	Standard Edition	Unlimited Edition
Number of Virtual Machines that can be backed up and restored (per host)	5 Virtual Machines	Unlimited Virtual Machines
MS Hyper-V Cluster Support (CSV Support)		

Supported Environments & Backup Destinations

Hosts:

- Windows 2008 R2 (all editions)
- Windows 2008 R2 SP1 (all editions)
- Windows Hyper-V Server R2 (core installation)

Guest Virtual Machines:

Altaro Hyper-V Backup supports all operating systems that are supported by Microsoft Hyper-V. Altaro Hyper-V Backup needs to be installed on the Hyper-V Host (not within the guest).

Supported Backup Destinations:

USB & eSATA External Drives, NAS & SAN systems, iSCSI, File Server UNC paths & RDX Drives.



Nabídka ZAK-2019-00464

Číslo dokladu:

Referent:

Datum:

Datum platnosti:

27.5.2019

10.6.2019

Dodavatel:**Comes spol. s r. o.**Třebohostická 2283/2
100 00 Praha 10

Sídlo: Vejvanovského 1615, 149 00 Praha 11, Chodov

IČ: 17047561, DIČ: CZ17047561

Zapsán v obch. rejstříku vedeném Krajským
obchodním soudem v Praze, oddíl C, vložka 2016Odběratel:**Město Slaný**Velvarská 136/1
274 01 Slaný, Kladno

IČ: 00234877, DIČ: CZ00234877

Platební údaje:

Způsob úhrady: Bankovním převodem

Požadovaná záloha: 0,00 Kč

Úrok: 0,1

Splatnost dní: 30

Měna: CZK

Obchodní údaje:

Doprava:

3.5 SW pro zálohování

Produkt	Záruka	Množství	Cena za jedn.	Cena bez DPH	DPH	Cena celkem
Popis						
6186-0001-03						
Altaro VM Backup - Standard Edition (5 VMs / Hyper-V Host)		1 Ks	12 610,00	12 610,00 21%	2 648,10	15 258,10
9005-042-03						
Instalace a konfigurace zálohování - Altaro Hyper-V Backup		1 Ks	3 990,00	3 990,00 21%	837,90	4 827,90
Celkem:		2 mj		16 600,00	3 486,00	20 086,00

Vystavil:

Strana 1 z 1

Altus VARIO - Obchodní informační systém - COMES, spol s r. o.