NOR_01: Configuration Synchronization

Version	Public version		
Date	01/09/2020		
Status	☐ Draft	⊠ Final	

Table of Contents

1.	Intr	oduction	2
	1.1.	Summary	2
	1.2.	Governed / Regulated by	2
	1.3.	Associated Procedures	2


Notice

This document is part of the Operational Manual of 4M MC and is governed by Change Control. Any change to this document shall follow the 4M MC Change control procedure. The content of this document might have

evolved by the time you read or use this document. Please contact the 4M MC OPSCOM to check that this is the latest version before using this document.

1. Introduction

This procedure describes the process of verifying that all connected PMBs have activated the same version of the Shared Configuration file.

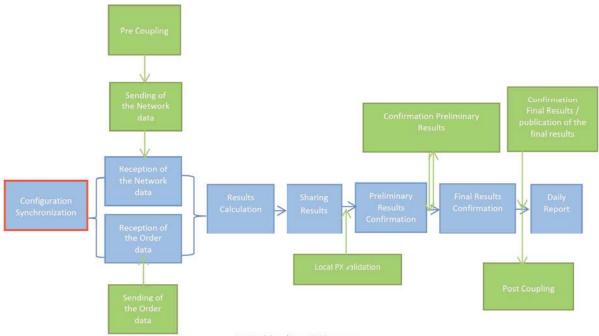

PCR in blue /Own PX in green

1.1. Summary

The first process of the Market Coupling Session is the verification of the PMB and Algorithm configurations for each PMB. The common parameters of the PMB and Algorithm must always be identical for all PMBs.

In a normal situation, this process is automatically launched when the PMB Start Time is reached.

All the PMBs send their current Shared Configuration file to the Cloud and also receive the Shared Configurations files from the other PMBs. When a Local PMB receives the Shared Configuration file, it compares it with its own Shared Configuration file, which must be "equal" for all PMBs.

No any action is expected from OTE, OKTE, HUPX, OPCOM Local PX IT systems.

1.2. Governed / Regulated by



1.3. Associated Procedures

In normal situation

If the Configuration Synchronization process is finished successfully, the process continues with the next steps:

- o NOR: Pre Coupling
- o NOR_02: Network Data Sending and Receiving
- o NOR_03: Order Data Sending and Receiving

In backup situation

As soon as an event occurs that prevents the normal performance of the NOR_01 process step, the PXs refer to procedure BUP_01.

