

PORPLASTICEP court –povrch nejen pro tenis

Jednovrstvĭ PUR/EPDM-povrch, celobarevnĭ , vodopropustnĭ

SKLADBA SYSTĚMU

Lajnovĭ nĕ:

PORPLASTIC X990

2x UV-nĕ tĚr (nepovinnĭ):

PORPLASTIC S620

vrstva EPDM-granulĭ tu (ca. 10 – 20 mm):

PORPLASTIC T770 s


PORPLASTIC EPDM 1 – 4 mm

primer:

PORPLASTIC P270- doporuĕeno pro asfalt

PORPLASTIC P274- pro beton, malĕ plochy

nosnĭ podklad (asfalt):

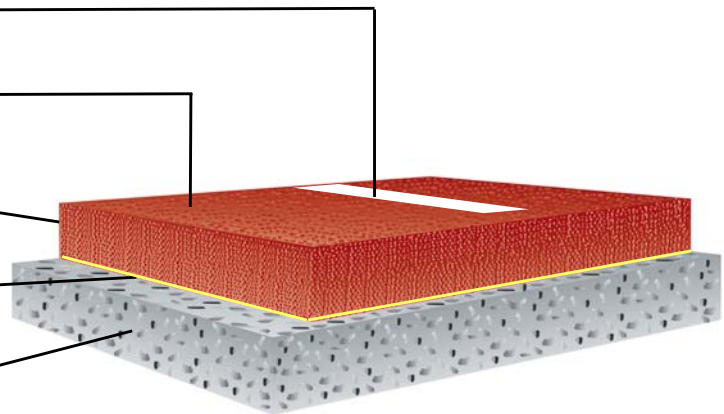

POPIS SYSTĚMU

- celkovĕ tlouĝka systĚmu 10 - 20 mm
- certifikovĕn v souladu s DIN V18035/6, typ C
- vodopropustnĭ
- extrĚmĕ odolnĭ proti odĚru
- UV- stabilnĭ,
- dostupnĭ v mnoha barevnĭch provedĕnĭch

PORPLASTICEP court

APLIKACE a SPOTŠBA

vrstva	materĀl	spotšba (kg/m ²)	tlouřka (mm)	aplikace
lajnovĀ nĀ	PORPLASTIC X990	20 – 30 g/m	0.1 – 0.2	nĀ stšk
UV-lak (nepovinnĀ)	PORPLASTIC S620	0.13 – 0.15 per layer	0.1 – 0.2	stškĀ nĀ, 2 vrstvy
EPDM granulĀt	PORPLASTIC T770	2.0 – 4.0	10 – 20	finiřer
	PORPLASTIC EPDM (1 - 3 or 1 - 4 mm)	10 – 20		
primer	PORPLASTIC P270 pro asfalt	0.15 – 0.2	ca. 0.1	nĀ stšk
	PORPLASTIC P274 pro beton, malĀ plochy	0.1 – 0.2	ca. 0.1	nĀ stšk



MOĀNOSTI POUĀITĚ

- tenisovĀ kurty
- vĀceřelovĀ hřtř
- hĀzenkĀřskĀ hřtř
- volejbalovĀ kurty
- florbalovĀ hřtř
- streetbalovĀ hřtř



TECHNICKĀ DATA

vlastnosti	norna	vĀ sledek	pořadavek
pevnost v tahu	DIN V 18035-6	0.54 N/mm ²	≥ 0.3 N/mm ²
tařnost	DIN V 18035-6	79 %	> 40 %
standartnĀ deformace	DIN V 18035-6	0°C: 1.62 23°C: 1.83 40°C: 2.03	< 4.0 mm (at 0 - 40°C)
tlouřka	DIN V 18035-6	20 mm	≥ 20 mm
relativnĀ obrus	DIN V 18035-6	8.1	≥ 5
propustnost	DIN V 18035-6	0.21 cm/s	> 0.01 cm/s
třenĀ (koeficient skluzu)	DIN V 18035-6	wet: 0.54 dry: 0.74	≥ 0.5 ≤ 1.1
odolnost proti hřbĀm	DIN V 18035-6	třĀda I-II	třĀda II
zbylĀ vtisk	DIN V 18035-6	0.60 mm	≤ 1.0 mm
stĀrnutĀ	DIN V 18035-6	pass	pass
ochrana řiv.prostřdĀ	DIN V 18035-6 tab. 6	splnĀno	LimitnĀ hodnoty DOC, EOX tĚřkĀ kovy, zĀpach