

OBJEDNÁVKA

Název: nákup senzorů pro monitorování průjezdů s funkcí čtení registračních značek (VZCK 081/2025)

Objednatel: Město Český Krumlov
Nám. Svornosti 1, 381 01 Český Krumlov
IČO: 00245836
DIČ: CZ00245836
Bankovní spojení: Komerční banka a.s., číslo účtu: 221241/0100
Odpovědná osoba: Ing. Jan Sládek, 608342197, jan.sladek@ckrumlov.cz

Dodavatel: itego a.s.
Bílková 6/8, Josefov
110 00 Praha 1
IČO: 24230031
Bankovní spojení: Česká spořitelna a.s., číslo účtu: 8555331862/0800
Odpovědná osoba: Tomáš Trachta, 602335378, tomas.trachta@itego.cz

V souladu s usnesením Rady města Český Krumlov č. 065/RM13/2025 a cenovou nabídkou Dodavatele, objednává Objednatel pořízení senzorů specifikovaných v příloze, demontáž stávajících senzorů a instalaci nových.

Zadání

Jak je uvedeno výše, součástí celého dohledového systému nad vjezdy do pěší zóny je kamerový dohled tvořený třemi senzory (kamerami) s funkcí čtení RZ a přenosem dat do centrálního informačního systému, kde probíhá vyhodnocení kontrola oprávnění.

V bodě 2 dodatku č. 1 k uzavření licenční a podlicenční smlouvě bylo mj. ujednáno: „Nabyvatel (město) se dohodl se společností itego a.s., IČO 24230031, která je ve vztahu k SW Bordo a tím i senzorům, subdodavatelem Poskytovatele, že v průběhu roku 2025 zakoupí od itego a.s. 3 nové senzory, které budou instalovány na místo 3 kusů senzorů s přísvitem VisionCraft viSEN 5G, jež jsou instalovány na základě Smlouvy. Do doby instalace 3 nových senzorů, jež Nabyvatel zakoupí od itego, a.s., zůstanou v Českém Krumlově instalovány 3 kusy senzorů s přísvitem VisionCraft viSEN 5G, jež jsou instalovány na základě Smlouvy.“

Předmětem objednávky je kamerové vybavení specifikované v příloze č. 1 za podmínek dle cenové nabídky uvedené v příloze č. 2.

Upozornění: Původní umístění senzoru na mostu E. Beneše v Linecké ulici nelze použít a je potřeba nalézt jiné vhodné umístění se zdrojem napájení.

Finanční část

Dodavatel dodá požadované senzory včetně demontáže stávajících a instalace, zapojení a úplného zprovoznění nových za cenu uvedenou v cenové nabídce v příloze č. 2, ve výši 260 688,45 Kč.

Uvedená částka bude Objednateli fakturována po odsouhlasení splnění objednávky odpovědnou osobou Objednatele.

Z této částky bude Objednateli vystavena zálohová faktura ve výši **50 % z celkové ceny**, tj. **130 344,23 Kč včetně DPH**, se splatností **14 kalendářních dnů od podpisu smlouvy**.

Zbývajících **50 %**, tj. **130 344,22 Kč včetně DPH**, bude Objednateli fakturováno po dokončení instalace a uvedení zařízení do provozu, a to na základě písemného odsouhlasení splnění objednávky odpovědnou osobou Objednatele.

Faktury budou vystavovány elektronicky, pokud se smluvní strany nedohodnou jinak.

Platby budou prováděny na bankovní účet Dodavatele:
8555331862/0800 (Česká spořitelna, a.s.)

Termín plnění

Dodavatel se zavazuje odevzdat dílo nejdéle do 31.7.2025.

Přílohy

1. Specifikace předmětu objednávky
2. Cenová nabídka Dodavatele

Za Objednatele:

Alexandr Nogrady
starosta města

Za Dodavatele:

(podpisem objednávku přijímá)

Tomáš Trachta
člen představenstva

iDS-2CD7A86G2/P-IZHS(Y)/(5G)
8MP DeepinView ANPR Moto Varifocal Bullet Camera

DeepinView^{series}

DarkFighter^{2.0}



Hikvision has been dedicated to develop products with security since established. Hikvision always follows security by design principle and has adopted many methods of security technologies into our product development lifecycle, including terminal security, data security, application security, network security, and privacy protection. In the meantime, the security technologies used by Hikvision are all in compliance with local applicable laws and safety regulations. These security measures could enhance product's cyber security protection capability and protect your devices as well as your data from malicious cyber attacks.

- High quality imaging with 8 MP resolution
- Excellent low-light performance via DarkFighter 2.0 technology
- Clear imaging against strong back light due to 140 dB AWDR technology
- Efficient H.265+ compression technology to save bandwidth and storage
- 5 streams to meet a wide variety of applications
- Water and dust resistant (IP67), vandal proof (IK10) and corrosion resistant (NEMA 4X, optional)
- High frame rate, up to 8MP@60fps and 2MP@120fps
- Built-in heater to ensure clear image under rainy or snowy weather
- Built-in G-sensor for vibration detection
- Built-in power meter for historical power statistics
- License plate recognition and vehicle attribution recognition

▪ Function

Perimeter Protection

With embedded deep learning based target detection and classification algorithms, the camera carries out the duty of perimeter protection, monitoring the actions of line crossing, intrusion, region entrance, and region exiting. The algorithms greatly filter out the mistaken alarm caused by the interference of leaves, lights, animal, flag, etc.

Road Traffic and Vehicle Detection

With embedded deep learning based license plate capture and recognition algorithms, the camera alone can achieve plate capture and recognition. The algorithm enjoys the high recognition accuracy of common plates and complex-structured plates, which is a great step forward comparing to traditional algorithms. Blocklist and allowlist are available for plate categorization and separate alarm triggering.

▪ Specification

Camera	
Image Sensor	1/1.8" Progressive Scan CMOS
Max. Resolution	3840 × 2160
Min. Illumination	Color: 0.0008 Lux @ (F1.2, AGC ON), B/W: 0.0001 Lux @ (F1.2, AGC ON), B/W: 0 Lux with IR
Shutter Time	1 s to 1/100,000 s
Day & Night	IR cut filter, Blue glass module (less ghost phenomenon)
Lens	
Focal Length & FOV	2.8 to 12 mm, horizontal FOV 104° to 41.2°, vertical FOV 54.2° to 23.1°, diagonal FOV 126.5° to 47.3° 8 to 32 mm, horizontal FOV 41.8° to 15°, vertical FOV 22.9° to 8.5°, diagonal FOV 48.7° to 17.1°
Focus	Auto, Semi-auto, Manual
Iris Type	P-iris
Aperture	2.8 to 12 mm: F1.38 to F2.53, 8 to 32 mm: F1.7 to F1.73
DORI	
DORI	Wide: 2.8 to 12 mm: D (Detect): 87 m, O (Observe): 34.5 m, R (Recognize): 17.4 m, I (Identify): 8.7 m 8 to 32 mm: D (Detect): 218 m, O (Observe): 86.5 m, R (Recognize): 43.6 m, I (Identify): 21.8 m Tele: 2.8 to 12 mm: D (Detect): 216 m, O (Observe): 85.7 m, R (Recognize): 43.2 m, I (Identify): 21.6 m 8 to 32 mm: D (Detect): 580 m, O (Observe): 230.2 m, R (Recognize): 116 m, I (Identify): 58 m The DORI values are calculated using pixel densities for different use cases as recommended by the EN 62676-4 standard.
Illuminator	
Supplement Light Type	IR
Supplement Light Range	2.8 to 12 mm: Monitoring: 60 m; 8 to 32 mm: Monitoring: 100 m
Smart Supplement Light	Yes
IR Wavelength	850 nm
Video	
Main Stream	Monitoring mode: 50 Hz: up to 50 fps (3840 × 2160, 3072 × 1728, 2688 × 1520, 1280 × 720), up to 100 fps (1920 × 1080) 60 Hz: up to 60 fps (3840 × 2160, 3072 × 1728, 2688 × 1520, 1280 × 720), up to 120 fps (1920 × 1080) *High frame rate is supported under monitoring mode only. smart mode: 50 Hz: 25 fps (3840 × 2160, 3072 × 1728, 2688 × 1520, 1920 × 1080, 1280 × 720) 60 Hz: 30 fps (3840 × 2160, 3072 × 1728, 2688 × 1520, 1920 × 1080, 1280 × 720)

Sub-Stream	50 Hz: 25 fps (1280 × 720, 704 × 576, 640 × 480) 60 Hz: 30 fps (1280 × 720, 704 × 480, 640 × 480)
Third Stream	50 Hz: 25 fps (1920 × 1080, 1280 × 720, 704 × 576, 640 × 480) 60 Hz: 30 fps (1920 × 1080, 1280 × 720, 704 × 480, 640 × 480)
Fourth Stream	50 Hz: 25 fps (704 × 576, 640 × 480) 60 Hz: 30 fps (704 × 480, 640 × 480)
Fifth Stream	50 Hz: 25 fps (704 × 576, 640 × 480) 60 Hz: 30 fps (704 × 480, 640 × 480)
Video Compression	Main stream: H.265+/H.265/H.264+/H.264, Sub-stream: H.265/H.264/MJPEG, Third stream: H.265/H.264, Fourth stream: H.265/H.264/MJPEG, Fifth stream: H.265/H.264/MJPEG
Video Bit Rate	32 Kbps to 16 Mbps
H.264 Type	Baseline Profile, Main Profile, High Profile
H.265 Type	Main Profile
Bit Rate Control	CBR, VBR
Scalable Video Coding (SVC)	H.264 and H.265 encoding
Region of Interest (ROI)	4 fixed regions for each stream
Target Cropping	Yes
e-PTZ	Support Patrol and Auto Tracking settings
Audio	
Audio Type	Mono sound
Audio Compression	G.711/G.722.1/G.726/MP2L2/PCM/MP3/AAC-LC
Audio Bit Rate	64 Kbps (G.711ulaw/G.711alaw)/16 Kbps (G.722.1)/16 Kbps (G.726)/32 to 192 Kbps (MP2L2)/8 to 320 Kbps (MP3)/16 to 64 Kbps (AAC-LC)
Audio Sampling Rate	8 kHz/16 kHz/32 kHz/48 kHz
Environment Noise Filtering	Yes
Network	
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, SFTP, DHCP, DNS, DDNS, SRTP, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv4, IPv6, UDP, Bonjour, SSL/TLS, ARP, WebSocket, WebSockets
Simultaneous Live View	Up to 20 channels
API	ISAPI, SDK, ISUP, OTAP, ONVIF (Profile S, Profile G, Profile T, Profile M)
User/Host	Up to 32 users 3 user levels: administrator, operator, and user
Security	Password protection, complicated password, HTTPS encryption, 802.1X authentication (EAP-TLS, EAP-LEAP, EAP-MD5), watermark, IP address filter, basic and digest authentication for HTTP/HTTPS, WSSE and digest authentication for Open Network Video Interface, RTP/RTSP OVER HTTPS, Control Timeout Settings, Security Audit Log, TLS 1.2, TLS 1.3, TPM 2.0 (FIPS 140-2 level 2), AES128/256
Network Storage	NAS (NFS, SMB/CIFS), Auto Network Replenishment (ANR), Together with high-end Hikvision memory card, memory card encryption and health detection are supported.
Client	iVMS-4200, Hik-Connect, Hik-Central

Web Browser	Plug-in required live view: IE 10, IE 11, Plug-in free live view: Chrome 57.0+, Firefox 52.0+, Edge 89+, Safari 11+, Local service: Chrome 57.0+, Firefox 52.0+, Edge 89+
Mobile Communication	
Standard	-5G: 5G NR/LTE-FDD/LTE-TDD
Frequency	-5G: 5G NR: n41/n77/n78/n79 LTE-FDD: B1/B3/B5/B8 LTE-TDD: B38/39/B40/B41
SIM Card Type	-5G: Micro SIM
Image	
Image Parameters Switch	Yes
Image Settings	Rotate mode,saturation,brightness,contrast,sharpness,white balance,AGC,adjustable by client software or web browser
Day/Night Switch	Day,Night,Auto,Schedule,Alarm Trigger,Video Trigger
Wide Dynamic Range (WDR)	140 dB
Image Enhancement	BLC,HLC,3D DNR,Distortion Correction,Defog
SNR	≥ 52 dB
Privacy Mask	8 programmable polygon privacy masks
Picture Overlay	LOGO picture can be overlaid on video with 128 × 128 24 bit bmp format.
Image Stabilization	EIS
Interface	
Video Output	1 Vp-p Composite Output (75 Ω/CVBS) (Only for debugging)
Ethernet Interface	1 RJ45 10 M/100 M/1000 M self-adaptive Ethernet port
On-Board Storage	Built-in memory card slot, support microSD/microSDHC/microSDXC card, up to 1 TB
Alarm	2 inputs, 2 outputs (max. 24 VDC/24 VAC, 1 A)
Audio	1 input (line in), 3.5 mm connector, three-contact, max. input amplitude: 3.3 Vpp, input impedance: 4.7 KΩ, interface type: non-equilibrium, 1 output (line out), 3.5 mm connector, three-contact, max. output amplitude: 3.3 Vpp, output impedance: 100 Ω, interface type: non-equilibrium, mono sound
RS-485	-Y: 1 RS-485 (Half duplex, HIKVISION, Pelco-P, Pelco-D, self-adaptive)
Reset Key	Yes
Power Output	-Y: 12 VDC, max. 100 mA
Wiegand	-Y: 1 Wiegand (CardID 26bit, SHA-1 26bit, Hik 34bit, NEWG 72 bit)
Event	
Basic Event	Motion detection (support alarm triggering by specified target types (human and vehicle)),video tampering alarm,video quality diagnosis,exception (network disconnected, IP address conflict, illegal login, abnormal restart, HDD full, HDD error),vibration detection
Smart Event	scene change detection,audio exception detection,defocus detection
Linkage	Upload to FTP/NAS/memory card,notify surveillance center,send email,trigger alarm output,trigger recording,trigger capture,audible warning
Deep Learning Function	
Perimeter Protection	Line crossing, intrusion, region entrance, region exiting Support alarm triggering by specified target types (human and vehicle) Support combined event alarm triggering

Metadata	Intrusion detection,line crossing detection,region entrance detection,region exiting detection,road traffic
Road Traffic and Vehicle Detection	Smart Function: Support license plate recognition of vehicles and motorcycles (only in checkpoint scenario) Support vehicle attribute detection, including vehicle type, color, brand, driving direction, etc. Support vehicle and non-vehicle counting Blocklist and allowlist: up to 10,000 records LPR Countries/Regions: 4 areas (Europe, Middle East, Asia-Pacific, Africa) and more than 124 countries/regions Accuracy (Under recommended installation and lighting conditions): License plate recognition rate $\geq 98\%$ Capture rate $\geq 99\%$ Driving direction accuracy rate $\geq 98\%$ Vehicle Capture Speed: Front installation in checkpoint scenario: up to 120 km/h Side installation: up to 80 km/h Capture Mode: License Plate and Vehicle Mode, Vehicle Priority Mode
General	
Power	without -5G: three-core terminal block, 12 VDC $\pm 20\%$, 2.06 A, max. 24.7 W, 24 VAC $\pm 20\%$, 1.68 A, max. 23.4 W, PoE: IEEE 802.3at, Type 2, Class 4, 42.5 V to 57 V, 0.59 A to 0.44 A, max. 24.7 W, -5G: three-core terminal block, 12 VDC $\pm 20\%$, 2.06 A, max. 24.7 W, 24 VAC $\pm 20\%$, 1.68 A, max. 23.4 W
Material	Aluminum alloy body
Dimension	With -Y: $\varnothing 140 \text{ mm} \times 377.4 \text{ mm}$ ($\varnothing 5.5" \times 14.9"$), Without -Y: $\varnothing 144.1 \text{ mm} \times 374.7 \text{ mm}$ ($\varnothing 5.7" \times 14.8"$)
Package Dimension	$425 \text{ mm} \times 190 \text{ mm} \times 180 \text{ mm}$ ($16.7" \times 7.5" \times 7.1"$)
Weight	Approx. 2170 g (4.78 lb.)
With Package Weight	Without -Y: Approx. 3364 g (7.42 lb.), -Y: Approx. 3275 g (7.22 lb.)
Storage Conditions	-40°C to 65°C (-40°F to 149°F). Humidity 95% or less (non-condensing)
Startup and Operating Conditions	-40°C to 65°C (-40°F to 149°F). Humidity 95% or less (non-condensing)
Language	33 languages: English, Russian, Estonian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Danish, Swedish, Norwegian, Finnish, Croatian, Slovenian, Serbian, Turkish, Korean, Traditional Chinese, Thai, Vietnamese, Japanese, Latvian, Lithuanian, Portuguese (Brazil), Ukrainian
General Function	Heartbeat,anti-banding,one-key reset,mirror,password protection,flash log
Heater	Yes
Demist	Yes
Device Management	Supports adding alarm box (DS-FM2466) in the LAN to expand 6 additional input and 6 output alarm interfaces

Approval	
EMC	CE-EMC: EN 55032:2015+A1:2020, EN 50130-4:2011+A1:2014, EN IEC 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, RCM: AS/NZS CISPR 32: 2015, IC: ICES-003: Issue 7, KC: KN32: 2015, KN35: 2015
Safety	CB: IEC 62368-1: 2014+A11, CE-LVD: EN 62368-1: 2014/A11: 2017, BIS: IS 13252 (Part 1): 2010/IEC 60950-1: 2005, LOA: IEC/EN 60950-1
Environment	CE-RoHS: 2011/65/EU, WEEE: 2012/19/EU, Reach: Regulation (EC) No 1907/2006
Protection	IP67: IEC 60529-2013, IK10: IEC 62262:2002
Anti-Corrosion Protection	-Y: NEMA 4X (NEMA 250-2018)
Automotive and Railway	EN50121-4
Other	PVC FREE

▪ Typical Application

Hikvision products are classified into three levels according to their anti-corrosion performance. Refer to the following description to choose for your using environment.

With -Y model: This model has MODERATE PROTECTION.

Without -Y model: This model has NO SPECIFIC PROTECTION.

Level	Description
Top-level protection	Hikvision products at this level are equipped for use in areas where professional anti-corrosion protection is a must. Typical application scenarios include coastlines, docks, chemical plants, and more.
Moderate protection	Hikvision products at this level are equipped for use in areas with moderate anti-corrosion demands. Typical application scenarios include coastal areas about 2 kilometers (1.24 miles) away from coastlines, as well as areas affected by acid rain.
No specific protection	Hikvision products at this level are equipped for use in areas where no specific anti-corrosion protection is needed.

▪ Available Model

iDS-2CD7A86G2/P-IZHSY(2.8-12mm)

iDS-2CD7A86G2/P-IZHSY(8-32mm)

iDS-2CD7A86G2/P-IZHS(2.8-12mm)

iDS-2CD7A86G2/P-IZHS(8-32mm)

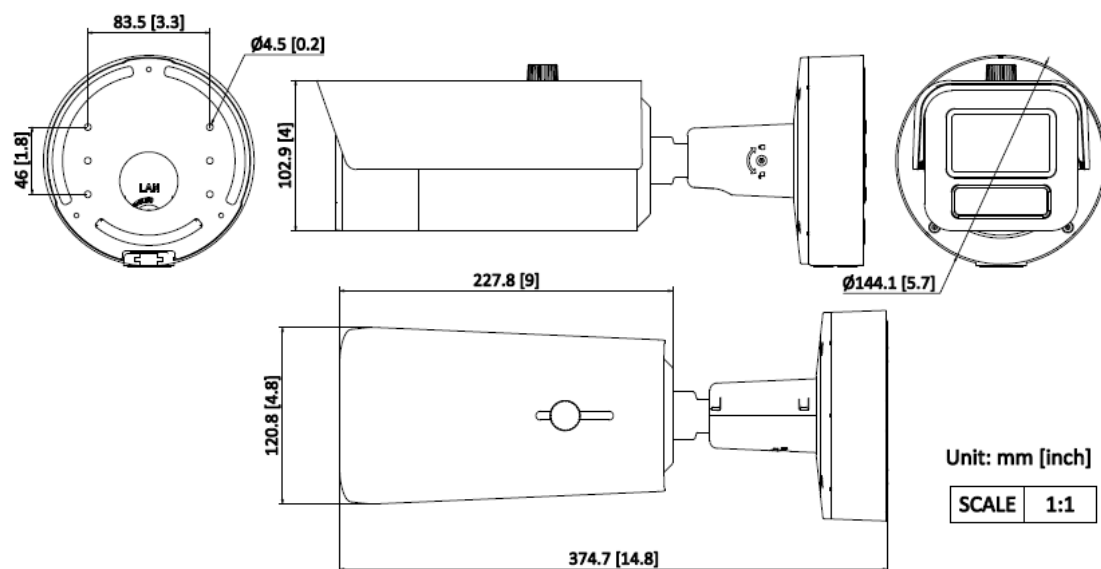
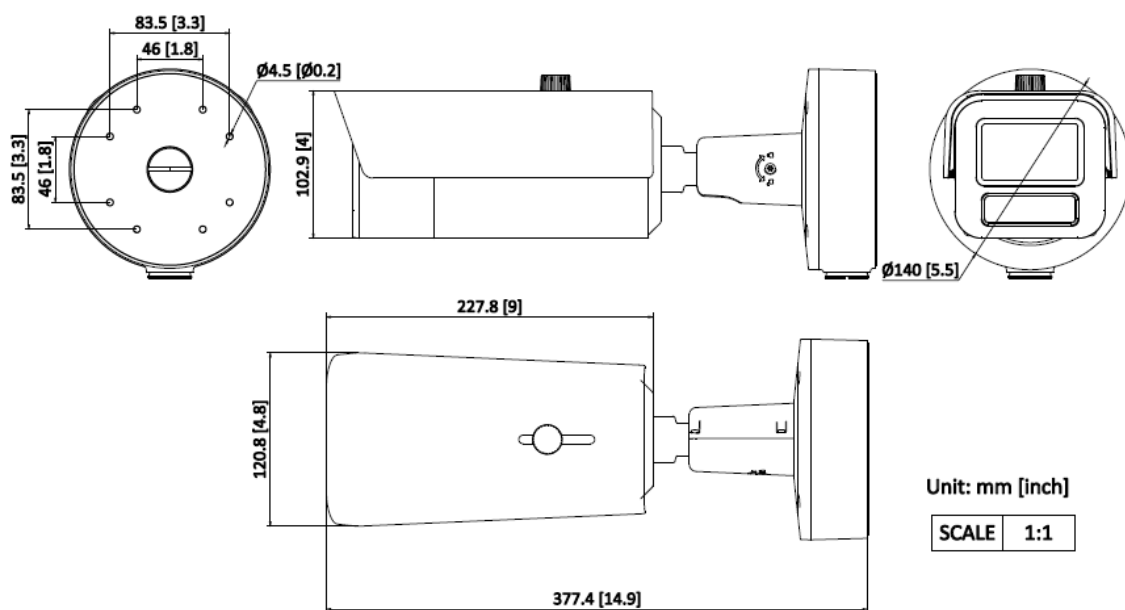
iDS-2CD7A86G2/P-IZHSY/5G(2.8-12mm)

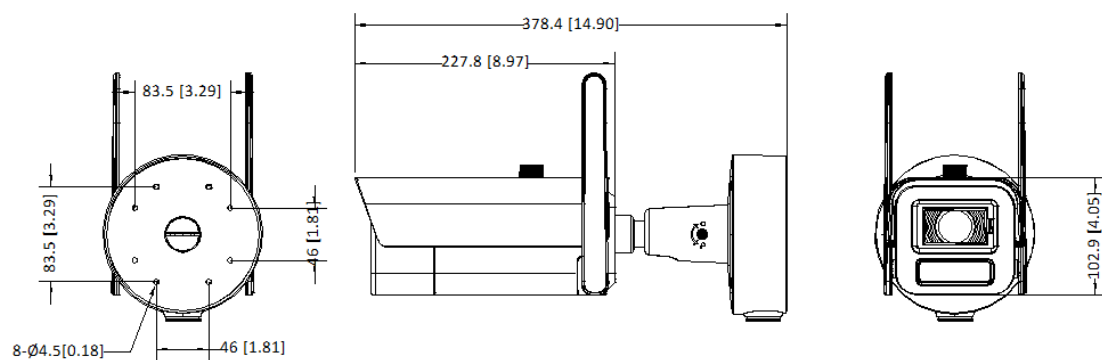
iDS-2CD7A86G2/P-IZHSY/5G(8-32mm)

iDS-2CD7A86G2/P-IZHS/5G(2.8-12mm)

iDS-2CD7A86G2/P-IZHS/5G(8-32mm)


Dimension





Unit: mm [inch]

SCALE	1:1
-------	-----





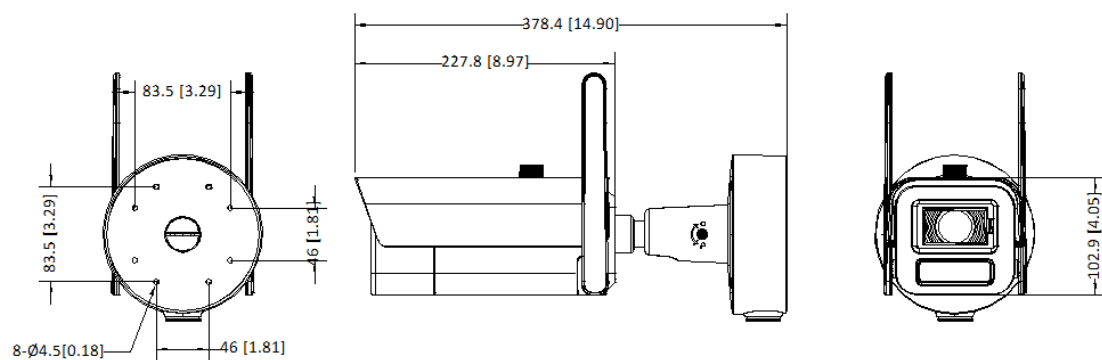


Unit: mm [inch]

SCALE	1:1
-------	-----

▪ **Accessory**

▪ **Optional**

DS-1475ZJ-SUS Vertical pole mount	DS-1476ZJ-SUS Corner mount	DS-1275ZJ-S-SUS Vertical pole mount	DS-1475ZJ-Y Vertical pole mount	DS-1476ZJ-Y Corner mount
				
				

See Far, Go Further



www.hikvision.com
support@hikvision.com



DODAVATEL

itego a.s.

Bílkova 6/8, Josefov
110 00 Praha 1IČO: 24230031
DIČ: CZ24230031
Vystavil: Masajlová, Markéta
Kontakt:Platnost od: 24.02.25
Platnost do: 26.03.25

ZÁKAZNÍK

Město Český Krumlov

náměstí Svornosti 1
381 01 Český KrumlovIČO: 00245836
DIČ: CZ00245836

POPIS	MNOŽSTVÍ	CENA / MJ	CENA BEZ DPH
Kamera - iDS-2CD7A86G2/P-IZHSY/5G(8-32mm)	3,000 ks	61 815,00 Kč	185 445,00 Kč
demontáž a instalace kamery	3,000 ks	10 000,00 Kč	30 000,00 Kč
Celkem bez DPH			215 445,00 Kč
Celkem DPH			45 243,45 Kč
CELKEM VČETNĚ DPH			260 688,45 Kč