

Confidential

XBID-DSA Maintenance

Attachment 4E

AIP100 – Software Architecture

Version 3.0

Confidential

[REDACTED]			
[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]
[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]
[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]
			[REDACTED]
			[REDACTED]
			[REDACTED]
			[REDACTED]

Confidential

Table of Contents

1	System Description	5
1.1	Architectural Overview	5
1.2	Modules	5
1.2.1	XBID-Core.....	5
1.2.1.1	Design Principles.....	5
1.2.1.2	Event-Driven Architecture	6
1.2.1.3	Processing Strategy	8
1.2.1.3.1	Inner events.....	8
1.2.1.3.2	Triggers	8
1.2.1.3.3	AMQP Message Listener	8
1.2.1.3.4	Inner Queue	8
1.2.1.3.5	Journaller	8
1.2.1.3.6	AckSender	8
1.2.1.3.7	Unmarshaller.....	8
1.2.1.3.8	Validator	9
1.2.1.3.9	Business (Logic) Processor	9
1.2.1.3.10	Persister	9
1.2.1.3.11	Order-Book Handler	9
1.2.1.3.12	Marshaller	9
1.2.1.3.13	Sender.....	9
1.2.1.4	Inquiry/Management Requests Separation	9
1.2.2	SOB-Enquiry.....	12
1.2.3	CMM-Enquiry.....	12
1.2.4	Capacity Management Integration (CMI).....	12
1.2.5	Shipping Module (SM).....	12
1.2.6	Shipping Module Integration.....	12
1.2.7	Frontend.....	13
1.2.8	Reporting Engine.....	13
1.3	Interfaces	13
1.3.1	SOB PMI	13
1.3.2	CMM PMI	13
1.3.3	SM WebServices	13
1.3.4	Common TSO Interface	14
1.4	Database Type.....	14
1.5	Data Archiving.....	14
1.5.1	Archiving	14
1.6	Logging	14
1.6.1	Application Logs.....	14
1.6.2	Audit Logs.....	14
2	Logical Data Model	16
3	Technical Data Models	17
4	Software requirements and hardware recommendations.....	18

Initial of DBAG

Confidential

4.1 Software requirements..... 18

5 Deployment Separation..... 19

6 References 20

Initial of DBAG

Confidential

1 System Description

[Redacted]

1.1 Architectural Overview

[Redacted]

[Redacted]

[Redacted]

1.2 Modules

[Redacted]


[Redacted]

[Redacted]

[Redacted]

Initial of DBAG

Confidential

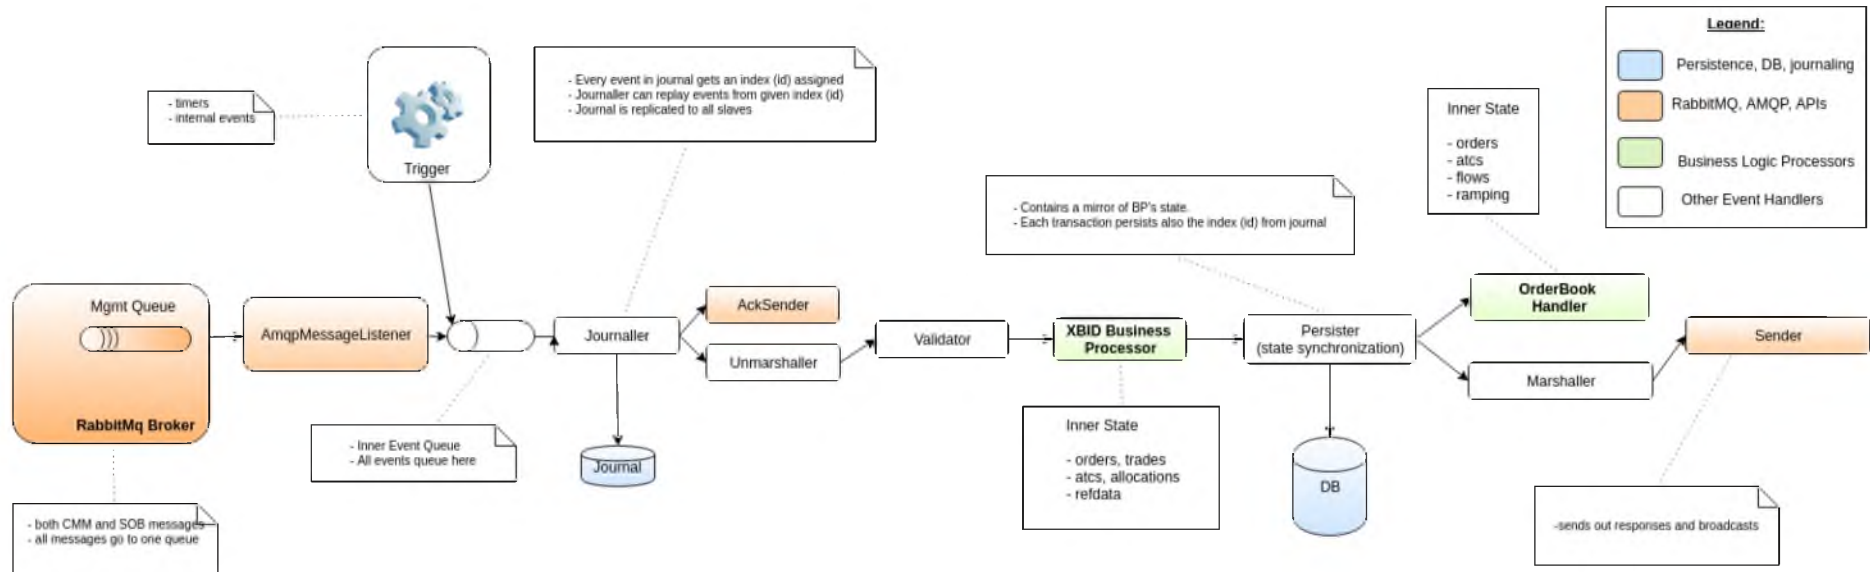

Initial of
DBAG

Confidential

[Redacted text block containing multiple lines of blacked-out content]

Initial of DBAG

Confidential

[Redacted text block containing multiple lines of blacked-out content]

Initial of DBAG

Confidential

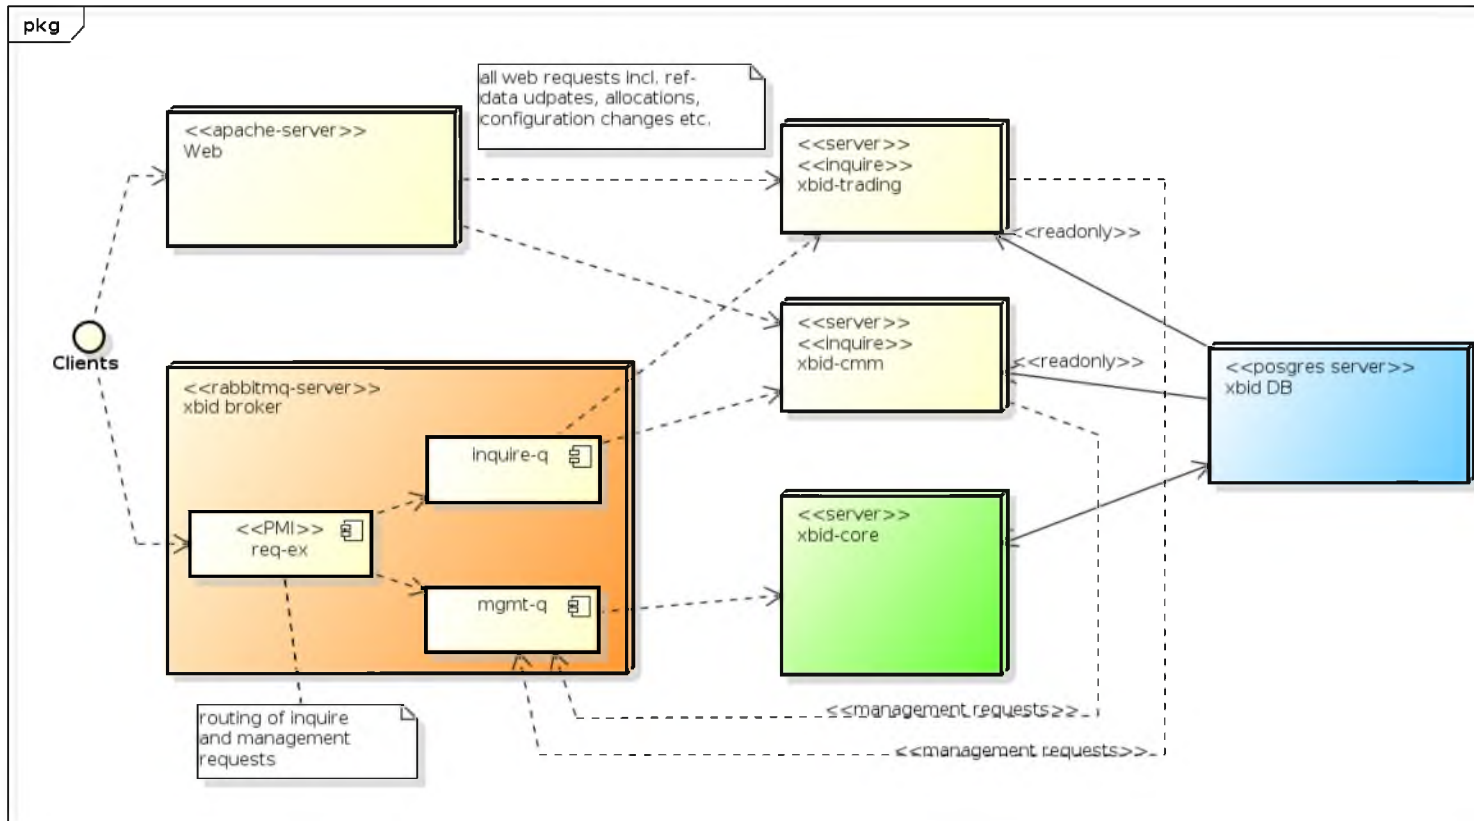


Diagram: High Level View on the communication among XBID-Core and the inquiry module

Initial of
DBAG

Confidential

[Redacted text block]

[Redacted text block]

[Redacted text block]

[Redacted text block]

[Redacted text block]

[Redacted text block]

[Redacted text block]

[Redacted text block]

[Redacted text block]

[Redacted text block]

[Redacted text block]

[Redacted text block]

[Redacted text block]

[Redacted text block]

[Redacted text block]

[Redacted text block]

[Redacted text block]

Initial of DBAG

Confidential

[Redacted]

[Redacted]

[Redacted]

[Redacted]

[Redacted]

[Redacted]

[Redacted]

[Redacted]

[Redacted]

[Redacted]

[Redacted]

[Redacted]

[Redacted]

[Redacted]

[Redacted]

[Redacted]

[Redacted]

[Redacted]

[Redacted]

Initial of DBAG

Confidential

[Redacted]

[Redacted]

[Redacted]

[Redacted]

1.4 Database Type

[Redacted]

1.5 Data Archiving

[Redacted]

[Redacted]

1.6 Logging

[Redacted]

[Redacted]

[Redacted]

- [Redacted]
- [Redacted]
- [Redacted]
- [Redacted]
- [Redacted]

[Redacted]

[Redacted]

[Redacted]

[Redacted]

[Redacted]

Initial of DBAG


Confidential



Initial of
DBAG

Confidential

2 Logical Data Model



Initial of
DBAG

Confidential

3 Technical Data Models

[Redacted content]

Initial of DBAG

Confidential

4 Software requirements and hardware recommendations

[Redacted]

4.1 Software requirements

[Redacted]

[Redacted]
[Redacted]
[Redacted]
[Redacted]
[Redacted]
[Redacted]
[Redacted]
[Redacted]
[Redacted]

Initial of
DBAG

Confidential

5 Deployment Separation

[Redacted text block]

[Redacted text block]

[Redacted text block]

Initial of DBAG

Confidential

6 References

[Redacted]

[Redacted]

[Redacted]

Initial of DBAG
