

Kupní smlouva – Diskové pole

č.: SML/1041/2017

uzavřena dle ustanovení § 2079 a násl. zákona č. 89/2012 Sb., občanský zákoník, ve znění pozdějších předpisů (dále jen „občanský zákoník“)

Níže uvedeného dne, měsíce a roku spolu smluvní strany:

Dům zahraniční spolupráce

se sídlem: Na Poříčí 1035/4, 110 00 Praha 1

zastoupen: Ing. Danou Petrovou, ředitelkou

IČO: 61386839

Kontaktní osoba: XXX

e-mail: XXX

tel.: XXX

dále jen „**kupující**“ na straně jedné

a

Netfox s.r.o.

se sídlem: Koněvova 2755/65, 130 00 Praha 3

zastoupen: Leošem Liščákem, jednatelem

IČO: 27574032

DIČ: CZ27574032

Bankovní spojení: XXX

ID datové schránky: xchpznz

Kontaktní osoba: XXX

e-mail:XXX

tel.: XXX

dále jen „**prodávající**“ na straně druhé

uzavřely tuto smlouvu:

Čl. I.

Předmět smlouvy

1. Předmětem této smlouvy je závazek prodávajícího řádně a včas dodat kupujícímu diskové pole a pevné disky do tohoto diskového pole (dále jen „zboží“) podrobně specifikované v Příloze č. 1 – Položkový rozpočet (dále jen „Příloha č. 1“), Příloze č. 2 – Popis předmětu plnění (dále jen „Příloha č. 2“) a Příloze č. 3 – Produktové listy (dále jen „Příloha č. 3“), a převést na něho vlastnické právo k tomuto zboží, a to za podmínek stanovených touto smlouvou. Kupující se zavazuje zaplatit za řádně dodané zboží a služby kupní cenu dle čl. IV. této smlouvy.
2. Vlastnické právo přechází na kupujícího okamžikem převzetí zboží.
3. Předmětem této smlouvy jsou rovněž služby spojené s plnou instalací a konfigurací zboží v sídle kupujícího.

Čl. II.

Místo plnění

1. Místem plnění předmětu této smlouvy je sídlo kupujícího.

Čl. III.

Doba dodání zboží

1. Zboží bude kupujícímu dodáno do 21 dnů od podpisu této smlouvy. Instalace a konfigurace zboží bude realizována na základě vzájemné dohody mezi kupujícím a prodávajícím, nejpozději však do 5 pracovních dnů od zaslání písemné výzvy (e-mailem) prodávajícímu.
2. K převzetí zboží je oprávněna kontaktní osoba kupujícího, která za tímto účelem podepíše protokol o předání a převzetí zboží. Předávací protokol rovněž podepíše odpovědný pracovník prodávajícího.
3. Proávající je povinen spolu se zbožím předat kupujícímu také technickou dokumentaci/produktové listy vztahující se ke zboží, jakož i veškeré listiny a doklady, jichž je třeba k nakládání se zbožím a k jeho řádnému užívání. Je-li to pro prodávané zboží předepsáno, je prodávající povinen předat kupujícímu i dokumenty o řádném provedení technických či jiných zkoušek.

Čl. IV.

Kupní cena, platební podmínky

1. Smluvní strany se dohodly, že kupní cena činí **2 096 800,- Kč** bez DPH (slovy: dvě milióny devadesátšesttisíc osm set korun českých). Ke kupní ceně bude připočtena zákonná sazba DPH.
2. Kupní cena za jednotlivé položky uvedené v Příloze č. 1 zahrnuje veškeré poplatky, výdaje a další náklady potřebné k řádnému a kvalitnímu plnění předmětu této smlouvy (včetně nákladů za případné balné a použitý materiál, dále dopravu, manipulaci, skladování a nákladů na sběr a ekologickou likvidaci dodaného zboží, dále náklady za plnou instalaci a konfiguraci datového úložiště v sídle kupujícího atd.), je konečná a nepřekročitelná.
3. Kupní cenu prodávající vyúčtuje kupujícímu formou faktury. Faktura bude obsahovat slovní popis dodávaného zboží, ze kterého bude patrné, o jakou položku se jedná, faktura obsahující pouze kódy a zkratky nebude kupujícím akceptována. Faktura musí obsahovat veškeré náležitosti daňového dokladu dle zákona č. 563/1991 Sb., o účetnictví, ve znění pozdějších předpisů

a zákona č. 235/2004 Sb., o dani z přidané hodnoty, ve znění pozdějších předpisů a § 435 občanského zákoníku. Splatnost faktury činí 21 dnů od jejího doručení kupujícím.

4. Pokud faktura nebude obsahovat všechny zákonem nebo smlouvou stanovené náležitosti, je kupující oprávněn ji do data splatnosti vrátit s tím, že prodávající je poté povinen vystavit novou fakturu s novým jednadvacetidenním termínem splatnosti. V takovém případě není kupující v prodlení s její úhradou a splatnost nově vystavené faktury běží opět od jejího doručení objednateli.
5. Platba bude poukázána bankovním převodem na účet prodávajícího uvedený na faktuře. Za okamžik zaplacení je považován den, kdy je částka odepsána z účtu kupujícího.

Čl. V.

Vady zboží, záruka za jakost, nároky z vad zboží

1. Prodávající odpovídá kupujícímu za vady, které se vyskytnou v záruční době, jež začíná běžet dnem následujícím po dni převzetí zboží.
2. Prodávající se zavazuje, že zboží bude po záruční dobu způsobilé pro použití ke smluvenému, jinak obvyklému účelu, a že si po tuto dobu zachová smluvené, jinak obvyklé vlastnosti, přičemž záruční doba činí 60 měsíců od jeho dodání kupujícímu.
3. Záruční doba se prodlužuje o dobu, po kterou nemůže kupující zboží užívat, tj. od nahlášení vady (uplatnění reklamace) až do doby protokolárního převzetí zboží kupujícím.
4. Zboží má vady, není-li prodávajícím dodáno ve sjednaném množství, kvalitě, provedení, nebo není způsobilé ke smluvenému, jinak obvyklému užití. Dále má zboží vady, není-li plně funkční.
5. Má-li zboží vady a je-li dodáním takového zboží porušena smlouva prodávajícím podstatným způsobem, je kupující oprávněn oznámit (formou e-mailu) bez zbytečného odkladu prodávajícímu výskyt vad a:
 - a. požadovat odstranění vad dodáním náhradního zboží za zboží vadné, dodáním chybějícího zboží a požadovat odstranění právních vad,
 - b. požadovat odstranění vad opravou zboží, jsou-li vady opravitelné,
 - c. požadovat přiměřenou slevu z kupní ceny, nebo
 - d. odstoupit od smlouvy.
6. Má-li zboží vady a je-li dodáním takového zboží porušena smlouva prodávajícím nepodstatným způsobem, je kupující oprávněn oznámit (formou e-mailu) bez zbytečného odkladu prodávajícímu výskyt vad a požadovat buď dodání chybějícího zboží a odstranění ostatních vad zboží, nebo přiměřenou slevu z kupní ceny.
7. Prodávající garantuje kupujícímu po dobu záruční doby u zboží zajištění záruční služby servisní podpory NBD, čímž se rozumí garantovaná doba pro vyřešení závady do následujícího pracovního dne (NBD) v rámci časového pokrytí 9x5 (Po – Pá 8:00 – 17:00 mimo svátky).

Kontakt pro hlášení vad je:

 - a. e-mail: XXX
 - b. tel.: XXX
8. Nedojde-li k odstranění vady za podmínek dle odst. 7 tohoto článku (NBD), nastupují podmínky dle čl. VI. odst. 10 této smlouvy. Současně je kupující v takovém případě oprávněn nechat na náklady prodávajícího vadu odstranit třetí osobou.
9. Veškeré náklady při řešení oprávněných vad zboží jdou k tíži prodávajícího.
10. Prodávající zaručuje, že na dodaném zboží nevážnou práva třetích osob, zejména práva vyplývající z průmyslového vlastnictví.

Čl. VI.

Povinnosti smluvních stran a sankce za jejich porušení

1. Prodávající se zavazuje, že veškeré plnění bude dodáno s odbornou péčí a v obvyklé kvalitě.
2. Prodávající se zavazuje dodat zboží na místo přesně určené kupujícím v jeho sídle v souladu s Přílohou č. 1, Přílohou č. 2 a Přílohou č. 3, v požadovaném množství, kvalitě a provedení, jež se hodí pro účel, k němuž se zboží obvykle užívá.
3. Prodávající se zavazuje, že zboží bude zcela nové, určené pro tuzemský trh a plně funkční, způsobilé ke smluvenému, jinak obvyklému způsobu užití a bude vyhovovat požadavkům uvedeným v Příloze č. 2 a Příloze č. 3.
4. Prodávající prohlašuje, že zboží má vlastnosti uvedené v Příloze č. 2 a Příloze č. 3 této smlouvy.
5. Prodávající se zavazuje dodat zboží při plném respektování zásad udržitelného rozvoje.
6. Prodávající se zavazuje během plnění smlouvy a po jejím ukončení zachovávat mlčenlivost o všech skutečnostech, o kterých se dozví od kupujícího v souvislosti s plněním smlouvy.
7. Kontaktní osoba prodávajícího uvedená v záhlaví této smlouvy je povinna poskytovat řádnou a dostatečnou součinnost při komunikaci s kupujícím, čímž se rozumí zejména zodpovězení dotazů kupujícího, či poskytování informací kupujícímu v pracovních dnech mezi 8:00 hod. a 17:00 hod., a to nejdéle do 24 hodin od okamžiku obdržení dotazu, či sdělení informace. V případě potřeby je prodávající povinen zajistit zástupce této kontaktní osoby.
8. Za porušení povinnosti mlčenlivosti specifikované v odst. 6 tohoto čl. je prodávající povinen uhradit kupujícímu smluvní pokutu ve výši 10.000,- Kč (slovy: desettisíckorunčeských), a to za každý jednotlivý případ porušení povinnosti.
9. Za porušení povinnosti součinnosti kontaktní osoby uvedené v odst. 7 tohoto čl. je prodávající povinen uhradit kupujícímu smluvní pokutu ve výši 1.000,- Kč (slovy: jedentisíckorunčeských), a to za každý jednotlivý případ porušení povinnosti.
10. V případě prodlení prodávajícího s plněním, nebo v případě vadného plnění předmětu smlouvy, má kupující nárok na smluvní pokutu ve výši 0,3 % z celkové kupní ceny vč. DPH, a to za každý byť i započatý den prodlení až do doby zjednání nápravy řádným splněním smlouvy.
11. V případě prodlení kupujícího s úhradou fakturované částky má prodávající nárok na úrok z prodlení v zákonné výši.
12. Kupující je oprávněn započíst smluvní sankce na splatnou část kupní ceny za zboží a služby poskytnuté dle této smlouvy.
13. Zaplacením smluvních sankcí není dotčen nárok smluvních stran na náhradu škody, která vznikla porušením této smlouvy, ani povinnost prodávajícího dále řádně plnit předmět smlouvy.
14. Zjistí-li některá ze smluvních stran překážky při plnění předmětu této smlouvy, které znemožňují jeho řádnou realizaci, je povinna to oznámit bez zbytečného odkladu druhé smluvní straně, se kterou se dohodne na odstranění těchto překážek.

Čl. VII.

Ukončení smlouvy

1. Tato smlouva může zaniknout:
 - a. písemnou dohodou smluvních stran;
 - b. písemným odstoupením od této smlouvy v případě podstatného porušení povinností z této smlouvy některou ze smluvních stran.

Podstatným porušením povinností se rozumí nesplnění smlouvy prodávajícím v požadovaném termínu, kvalitě, provedení, množství, neodstranění vad dle ust. čl. V. této smlouvy, nedodání plně funkčního zboží, dodání zboží nezpůsobilého ke smluvenému, jinak obvyklému způsobu užití, dodání zboží, které nevyhovuje požadavkům uvedeným v Příloze č. 1, Příloze č. 2, či v Příloze č. 3, nezaplacení splatného závazku kupujícího i přes písemnou výzvu prodávajícího, nebo porušení povinnosti mlčenlivosti uvedené v čl. VI. odst. 6 této smlouvy.

2. Odstoupení od smlouvy je účinné dnem, kdy bylo písemné oznámení o odstoupení doručeno druhé smluvní straně.
3. Odstoupením od smlouvy nejsou dotčena práva smluvních stran na úhradu splatné smluvní sankce, úroků z prodlení a náhrady škody.

Čl. VIII.

Závěrečná ustanovení

1. Prodávající je podle ustanovení § 2 písm. e) zákona č. 320/2001 Sb., o finanční kontrole ve veřejné správě a o změně některých zákonů (zákon o finanční kontrole), ve znění pozdějších předpisů, osobou povinnou spolupůsobit při výkonu finanční kontroly prováděné v souvislosti s úhradou zboží nebo služeb z veřejných výdajů.
2. Prodávající podpisem smlouvy výslovně souhlasí s uveřejněním celého znění této smlouvy, a to s ohledem na zákonnou povinnost uveřejnění smlouvy prostřednictvím registru smluv. Pro případ pochybností smluvní strany shodně prohlašují, že tato smlouva neobsahuje obchodní tajemství, utajované informace, či další údaje, které by nemohly být uveřejněny prostřednictvím registru smluv.
3. Obě smluvní strany se dohodly, že splnění zákonné povinnosti uveřejnění smlouvy prostřednictvím registru smluv zajistí kupující.
4. Veškeré právní vztahy touto smlouvou výslovně neupravené se řídí občanským zákoníkem.
5. Smluvní strany se zavazují, že v případě sporů o obsah a plnění této smlouvy vynaloží veškeré úsilí, které lze spravedlivě požadovat, k tomu, aby tyto spory byly vyřešeny smírnou cestou, zejména aby byly odstraněny okolnosti vedoucí ke vzniku práva od této smlouvy odstoupit nebo způsobující její neplatnost. Pokud by se v důsledku změny právních předpisů nebo jiných důvodů stala některá ujednání této smlouvy neplatnými nebo neúčinnými, budou tato ustanovení uvedena do souladu s právními normami a smluvní strany prohlašují, že tato smlouva je ve zbývajících ustanoveních platná, neodporuje-li to jejímu účelu nebo nejedná-li se o ustanovení, která oddělit nelze.
6. Obě smluvní strany sjednávají, že v případě sporu vzniklého při plnění, nebo v souvislosti s touto smlouvou, jsou příslušné k jeho řešení obecné soudy České republiky.
7. Jakékoliv změny či doplňky této smlouvy je možné činit pouze formou písemných vzestupně číslovaných dodatků odsouhlasených oběma smluvními stranami.
8. Tato smlouva je vyhotovena ve dvou stejnopisech s platností originálu, z nichž jeden obdrží kupující a jeden prodávající.
9. Tato smlouva nabývá platnosti dnem podpisu obou smluvních stran a účinnosti dnem uveřejnění v registru smluv.
10. Smluvní strany prohlašují, že tato smlouva byla sepsána podle jejich pravé a svobodné vůle, že si smlouvu přečetly, s jejím obsahem souhlasí a na důkaz toho připojují vlastnoruční podpisy.

Přílohy:

Příloha č. 1 – Položkový rozpočet

Příloha č. 2 – Popis předmětu plnění

Příloha č. 3 – Produktové listy

V Praze dne 18. 12. 2017

V Praze dne 12. 12. 2017

Leoš Liščák
jednatel
prodávající

Ing. Dana Petrova
ředitelka DZS
kupující

Příloha č. 1

Položkový rozpočet

Název zakázky:		Disková pole				
Nabídka účastníka - název:		Netfox s. r.o.				
Nabídka účastníka - IČO:		27574032				
NABÍDKOVÁ CENA ÚČASTNÍKA						
Položka č.	Popis	Požadovaný počet kusů	Cena za jednotku v Kč bez DPH	Cena v Kč bez DPH za požadovaný počet kusů	Samostatně DPH v Kč za požadovaný počet kusů	Cena v Kč včetně DPH za požadovaný počet kusů
1	diskové pole splňující požadavky zadavatele podrobně specifikované v Příloze č. 1 zadávací dokumentace, včetně služeb zahrnujících plnou instalaci a konfiguraci datového úložiště v sídle zadavatele a požadovaného servisu a záruky 5 let NBD	1	656 800,00	656 800,00	137 928,00	794 728,00
2	pevný disk určený do výše popsaného diskového pole (Položka č. 1) splňující požadavky zadavatele podrobně specifikované v Příloze č. 1 zadávací dokumentace, včetně požadovaného servisu a záruky 5 let NBD	24	60 000,00	1 440 000,00	302 400,00	1 742 400,00
Celková nabídková cena (součet cen všech výše uvedených položek)				2 096 800,00	440 328,00	2 537 128,00

Účastník vyplňuje pouze bílé kolonky tabulky. Účastník je povinen nacenit veškeré položky skutečnou cenou. Položkový rozpočet nesmí obsahovat nuly, text zdarma, či v ceně. Při nesplnění této podmínky bude nabídka vyřazena a účastník vyloučen ze zadávacího řízení.

Popis předmětu plnění

Předmětem smlouvy je nákup 1 ks diskového pole, včetně plné instalace a konfigurace tohoto datového úložiště, a 24 ks pevných disků do uvedeného diskového pole.

Diskové pole:
- diskové pole obsahující minimálně 24 SFF slotů; výška 2U;
- diskové pole musí být vybaveno minimálně 2 řadiči v režimu vysoké dostupnosti s možností rozšíření až na 4 řadiče;
- diskové pole musí být vybaveno minimálně 4x 16Gb FC porty pro připojení hostů;
- každý řadič diskového pole musí být vybaven minimálně jedním portem pro vzdálenou replikaci po FC a IP;
- řadiče musí být celkem osazeny dostatečnou cache pamětí (min. 32GB RAM na řadič);
- cache paměť musí být zálohována a chráněna proti ztrátě dat v případě havárie nebo výpadku el. proudu po dobu minimálně 96 hodin;
- diskové pole musí podporovat funkcionalitu SSD cache (Flash cache), které umožní dále rozšířit cache diskového pole na minimálně 832GiB pro každou dvojici kontrolerů;
- veškeré upgrady pole (včetně upgrade FW řadičů i disků, přidávání diskových polic) musí být realizovatelné on-line;
- pro optimalizaci výkonu a rovnoměrné zatížení všech zdrojů kupující požaduje, aby diskové pole pracovalo v Active-Active režimu;
- přístup obou řadičů ke každému danému LUNu musí být plně symetrický/rovnocenný tj. ne podle standardu ALUA;
- na stejných fyzických discích musí být možné vytvářet logické disky s různými RAID geometriemi (tento požadavek vychází z předpokladu, že diskové pole bude vnitřně virtualizováno pro celkové usnadnění administrace a efektivní zacházení s výkonovými a kapacitními rezervami);
- požadována podpora RAID10, RAID5, RAID6;
- výpočet RAID zabezpečení musí být vykonáván samostatným HW obvodem, aby výpočet parity neovlivňoval výkon CPU a celého pole; pokud řešení nemá samostatný HW obvod, kupující požaduje min. 8-mi jádrové CPU na řadiči pole;
- pro potřeby optimalizace výkonu musí pole umožňovat migraci mezi různými RAID zabezpečeními, storage tiery a různými typy provisioningu (Thick, ThP);
- plná podpora Thin Provisioning s reklamací uvolněného prostoru do poolu přístupného všem serverům; pokud reklamáce vyžaduje speciální nástroje, musí být součástí nabídky; nabízené řešení musí podporovat lokální i vzdálené synchronní a asynchronní replikace prostředky pole přes FibreChannel a IP;
- nabízené řešení musí být možné v budoucnu rozšířit o integraci pro vytváření aplikačně konzistentních snapshotů pro Oracle, SAP, MS SQL, MS Exchange a Hyper-V (licence není vyžadována);
- diskové pole musí obsahovat funkcionalitu pro kompletní monitoring a reporting výkonu a kapacity, včetně práce s historickými daty (licence je vyžadována);
- požadované funkcionality musí být nabídnuty pro neomezený počet připojených serverů (vzhledem k povaze celého prostředí není pro kupujícího žádoucí, aby byl omezen počtem připojených serverů);
- úložiště musí podporovat funkci instantních kopií (snapshot) a plných kopií (klony) svazků v rozsahu minimálně 512 kopií daného svazku;
- úložiště musí umožnit tvorbu kopií svazků (snapshoty a klony) v režimu thin provisioning (ThP) rovněž u svazků vytvořených v režimu plného provisioningu (Thick);
- úložiště musí podporovat automatické uvolnění prostoru pro smazání thin provisioning (ThP) snapshotů;
- kupující požaduje certifikovanou podporu VMware ESXi 5.5 nebo novější, MS Windows 2008 nebo novější, RHEL a SUSE Linux;
- kupující požaduje plnou podporu Microsoft ODX a VMware VAAI, VASA a vVOL protokolů;

Diskové pole:

- podpora zařízení musí zahrnovat nárok na nové verze firmware a veškerých SW titulů spojených s požadovanou funkcionalitou;
- součástí předmětu plnění této smlouvy je i plná instalace a konfigurace datového úložiště v sídle kupujícího;
- kupující požaduje redundantní napájení a chlazení;
- kupující požaduje servis a záruku 5 let NBD

Pevný disk:

- o minimální kapacitě 400GB SAS MLC SFF SSD určený do výše popsaného diskového pole
- kupující požaduje servis a záruku 5 let NBD

Příloha č. 3

Technická specifikace/Produktové listy

https://www.hpe.com/h20195/v2/GetDocument.aspx?docname=4AA5-9493ENW&doctype=data%20sheet&doclang=EN_US&searchquery=&cc=ca&lc=en

HPE 3PAR StoreServ 8000 Storage

Effortless, Tier-1 flash with midrange affordability

Key features and benefits

Lower your total cost of storage with flash

- Lower the cost of all-flash with robust support including a 5-year warranty and 7-years of wear out¹
- Get the savings you want with the performance you need with HPE 3PAR Adaptive Data Reduction, inclusive of deduplication, compression, and Data Packing
- Transition to all-flash data center with simple HPE 3PAR All-inclusive software licensing
- Get industry-leading density of up to 11 PB per floor tile

Deliver performance without compromise

- Remove bottlenecks with a flash-optimized, scale-out architecture delivering over 1 million IOPS and over 20 GB/s
- Protect service levels with QoS optimization and consistent, sub-millisecond latency
- Support mixed workloads and accelerate performance with the HPE 3PAR Gen5 ASIC

Avoid downtime and consolidate with confidence

- Maintain software defined extreme high availability with Peer Persistence support for three data centers and disaster recovery over distance
- Replicate data between StoreVirtual VSA and 3PAR directly for remote offices, low cost data protection
- Achieve near-synchronous RPOs with flexible, transparent, model-agnostic remote replication
- Simplify backup and restores with application-aware, flash-integrated data protection

Looking to consolidate onto an enterprise-class flash array without compromising performance, scalability, data services, or resiliency? With unmatched versatility, performance, and density, HPE 3PAR StoreServ 8000 Storage has you covered.

The industry experts have validated our claim. HPE 3PAR StoreServ All-Flash solution is the only one of its kind to be featured as a leader by Gartner and IDC with leading SPC-1 and SPC-2 results. For example, the HPE 3PAR StoreServ 8450 SPC-1 benchmark that delivers \$0.23/SPC-1 IOPS² gives you industry leading affordability with all-flash performance.

HPE 3PAR StoreServ 8000 Storage delivers the performance advantages of a purpose-built, flash-optimized architecture without compromising resiliency, data services, or data mobility. A flash-optimized architecture reduces the performance bottlenecks that can choke hybrid and general-purpose disk arrays. However, unlike other purpose-built flash arrays, HPE 3PAR StoreServ 8000 does not require you to introduce an entirely new architecture into your environment to achieve flash-optimized performance.

As a result, you don't have to sacrifice rich, Tier-1 data services, quad-node resiliency, or flexibility to get midrange affordability. A choice of all-flash, converged flash, and tiered-flash models gives you a range of options that support true convergence of block and file protocols, all-flash array performance and the use of spinning media to further optimize costs. All-flash performance at the lowest possible cost starts with HPE 3PAR Adaptive Data Reduction technologies that includes Zero Detect, deduplication, compression, and Data Packing. Support for iSCSI connectivity gives you the flexibility to deploy flash using Ethernet while preserving sub-millisecond latencies.

You'll be up and running in just minutes, meeting mixed workload demands with improved service levels and virtually unlimited scalability options. You'll spend less time managing your storage with converged block, file, and object access from a single interface. You'll maintain high availability through a complete set of persistent technologies and have the option of simple and efficient data protection with flat backup to HPE StoreOnce Backup appliances. You'll rid yourself of tradeoffs that have forced you to sacrifice critical capabilities like all-flash performance for scalability and Tier-1 data services.

Lower your total cost of storage with flash

With rich capabilities lowest possible cost for all-flash performance and non-disruptive scalability to four nodes, HPE 3PAR StoreServ 8000 Storage eliminates tradeoffs. You no longer need to choose between affordability and Tier-1 resiliency or flash-optimized performance and Tier-1 data services. That's because HPE 3PAR StoreServ 8000 Storage shares the same flash-optimized architecture and software stack with the entire family of HPE 3PAR StoreServ arrays—so you'll not only get an industry-leading storage platform, but a storage platform that you can grow into, not out of.

¹ All SSDs on HPE 3PAR 8000/20000 purchased after June 1, 2015 with life left below 5% as determined by HPE and with drive age less than seven years from warranty start date and no interruption in HPE support coverage. Wear out in years six and seven applies to media and electronic failure replacements for all SSDs.

² [SPC-1 Executive Summary](#)

Respond effortlessly to unpredictable and changing demands

- Grow with freedom in any direction, from as little as 3 TB to up to 11 PB usable in a single system³
- Modernize your EMC, HDS, and IBM storage infrastructure with painless, no-cost data migration
- Address storage at the data center level with seamless data movement between arrays
- Unify management with a single experience from device to data services to data center

Get industry-leading density

HPE compaction technologies not only drive flash affordability, but also improve scalability, specifically with relation to density.

Consolidate more data in a smaller footprint:

- Start with 550 TB usable capacity in a single 2U enclosure
- Scale to up to 11 PB usable capacity in a single HPE 3PAR StoreServ 8000 system

HPE 3PAR flash-optimized portfolio

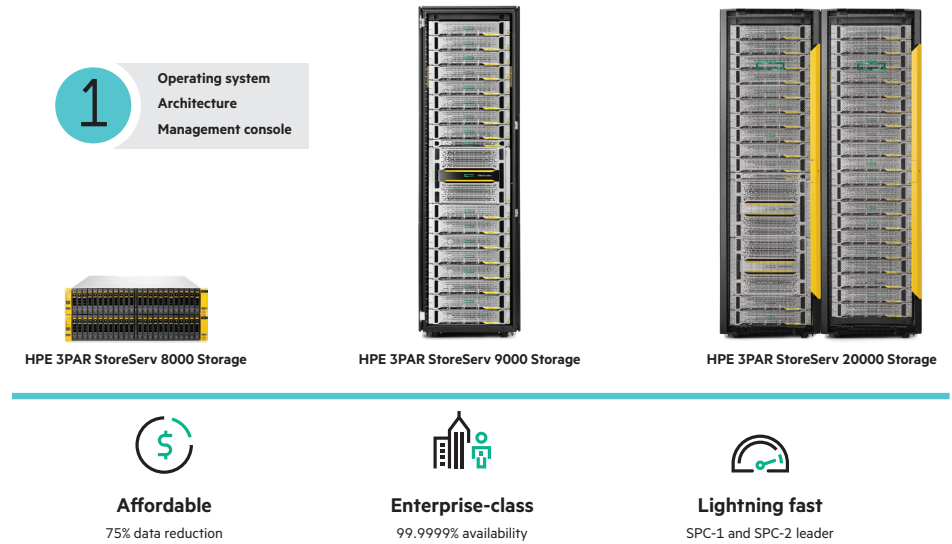


Figure 1. HPE 3PAR StoreServ Storage models

Unlike bolt-on thin storage on legacy arrays, HPE 3PAR StoreServ 8000 Storage features hardware-enabled **Adaptive Data Reduction software**—including inline deduplication for any SSD tier—that allow the system to run in a state of consistent high-capacity utilization without performance tradeoffs; compression with inline Express Scan that removes redundant data and prevents wasted CPU cycles; Data Packing condenses data to a single page increasing storage efficiency and bandwidth. You save on the cost of a storage technology refresh and increase storage ROI by keeping incremental purchases, administration, and operating costs low over time. These technologies help you get the most out of your system’s flash capacity and reduce your total cost of storage while improving flash media endurance. In fact, the HPE Data Reduction Guarantee offers assured storage efficiency for your workload—guaranteed.⁴

True convergence of block, file, and object access

With HPE 3PAR File Persona, you can unlock the native file and object access capabilities within any of your HPE 3PAR StoreServ Storage array. This approach offers a unique solution that incorporates multi-protocol support into the system architecture to deliver a tightly integrated, converged solution for provisioning both block volumes and file shares from a single storage system. Unlike traditional solutions, this converged solution extends the architectural benefits that the HPE 3PAR StoreServ Storage system already delivers for block workloads to file shares and object access in a way that is simple to deploy and administer.

HPE 3PAR File Persona enables a rich set of file protocols, file data services, and an HPE 3PAR Object Access API (REST) and gives you the ability to provision file shares in addition to block volumes from a single graphical user or programmatic management interface. This solution extends the spectrum of storage workloads natively addressed by the system’s default Block Persona. The Block Persona is ideal for your virtualization, database, and application workloads with the File Persona enabling home directory and user shares, enhanced content management and collaboration, and data preservation and governance.

Flexible management that’s so simple, it’s autonomic

The HPE 3PAR StoreServ Management Console (SSMC) enables effortless management of your HPE 3PAR StoreServ Storage (Figure 2). It is a sleek, web-based console that gives you comprehensive, consolidated management of your entire converged storage deployment with HPE OneView integration. Support for a variety of application interfaces and for OpenStack® gives you unprecedented flexibility and increases productivity by giving your application and VMware® administrators greater visibility and control. Flexibly manage block, file, and object access

³ Minimum configuration starts with six HDDs or SSDs. Maximum configuration includes 5.6 TB usable SSD capacity (with 4:1 compaction) and 1.7 TB usable HDD capacity (with 2:1 compaction)

⁴ Subject to qualification and compliance with the **HPE 3PAR Data Reduction Guarantee** details

The autonomic experience




Figure 2. The HPE 3PAR StoreServ Manage Console (SSMC) dashboard view provides health, performance, and capacity at a glance for up to 32 HPE 3PAR StoreServ arrays of any model

Do you have to provide QoS with sub-millisecond latency?

HPE 3PAR Priority Optimization software enables you to manage service levels for applications and workloads as business requirements dictate to provide QoS.

This means you can provision storage performance as easily and efficiently as provisioning storage capacity. Reduce contention and certify that performance is delivered where you need it most in multi-tenant environments.

A highly automated approach allows you to assign a minimum goal quickly and easily for IOPS, bandwidth, and latency to protect mission-critical applications in enterprise environments.

Alternatively, assign performance thresholds on workloads with lower service-level requirements. This capability allows you to consolidate more applications on less infrastructure while delivering predictable performance to meet even the most demanding service-level requirements.

Unlike application-centric approaches to storage, one-click autonomic rebalancing on HPE 3PAR StoreServ Storage enables you to help improve QoS levels without service disruption, pre-planning, or the need to purchase separate arrays to support different service levels.

from a single interface serving diverse workloads. Get all the information you need at a glance with customizable reporting capabilities. Remove the need for add-on software tools as well as diagnosis and troubleshooting that typically require professional services.

Assess what's happening across the entire data center in seconds via a simple dashboard and you are just one click away from collecting configuration and health information on any resource. Historical performance and capacity reports are also accessible with one click via HPE 3PAR System Reporter to help you plan future configuration changes to improve infrastructure investments.

HPE Smart SAN for HPE 3PAR StoreServ

HPE Smart SAN for HPE 3PAR software, which is part of the HPE 3PAR All-inclusive base offering, brings together a set of unique features based on Fibre Channel Industry Association (FCIA) standards and HPE innovation to simplify SAN management. HPE Smart SAN for 3PAR helps reduce end-to-end SAN complexity for all-flash deployments using HPE 3PAR StoreServ to orchestrate SAN host provisioning (SAN zoning) automatically to address the complexity and tedious nature of traditional SAN switch zoning, HPE leveraged an industry standard FCIA T-11 definition for peer zoning, added a set of creative software features in HPE 3PAR StoreServ, and collaborated with HPE StoreFabric FC to implement Smart SAN for 3PAR support in their FC solutions. HPE Smart SAN for HPE 3PAR support includes StoreFabric (16 Gb and 32 Gb FC) host bus adapters, HPE StoreFabric B-series FC switches (16 Gb and 32 Gb) and select converged HPE FlexFabric 5900 Switch Series.

HPE Smart SAN for HPE 3PAR is an end-to-end software-defined networking solution that automates host orchestration in the SAN across a single HPE 3PAR or an HPE 3PAR Federation in minutes, not hours or days using the HPE 3PAR CLI or HPE 3PAR SSMC with less human error—more SAN simplicity and greater SAN resiliency.

Storage analytics in the cloud with HPE StoreFront Remote

The HPE StoreFront Remote (SFRM) SaaS Portal provides proactive tools and integrated data collection from the HPE 3PAR StoreServ Storage arrays that call home to deliver unique insights and analytics all in one dashboard. Identify capacity and performance issues early through intuitive capacity and get recommendations to increase the wellness score of your HPE 3PAR StoreServ arrays.

Get the most out of your storage investment and continuously optimize your infrastructure based on remedial actions suggested by SFRM. Go to [HPE StoreFront Remote](#) for information on how to register your arrays.

Deliver performance without compromise

HPE 3PAR StoreServ 8000 Storage removes the bottlenecks that prevent legacy storage from taking full advantage of flash-based media. A flash-optimized architecture enables optimal performance of flash-based SSDs that may also be used as a true extension of DRAM cache. Block-level storage tiering and mixed workload optimization enable high levels of performance for both spinning and flash media.

This flash-optimized architecture allows the HPE 3PAR StoreServ 8000 Storage family to deliver multi-petabyte scalability with accelerated performance of over 1 million IOPS, over 20 GB/s, and sub-millisecond latency. This flash-optimized architecture relies on several unique HPE 3PAR StoreServ innovations:

- **Multi-controller, scale-out architecture:** Up to four controllers form a Mesh-Active cluster based on a unique system of controller node interconnects. Unlike traditional “Active/Active” architectures, this clustered design delivers robust, load-balanced performance and greater headroom for cost-effective scalability that overcomes the tradeoffs typically associated with modular and monolithic storage.

Boost flash performance with Gen6 32 Gbps Fibre Channel

Increase SAN performance for all-flash with Gen6 32 Gb FC. For a MS SQL 2016 Warehousing environment, test results show a 37% increase in read throughput, 54% of large block I/Os completed in less than 2 ms, and 49% higher SQL transactions per second.

Need proof?

See the results from the [Demartek Evaluation Report: Improving Business Outcomes with HPE DL380 Gen9 Server, 3PAR StoreServ 8450 All-Flash Storage, StoreFabric SN6600B Switch and SN1600E HBA Gen6 32 Gb FC](#)



Figure 3. Simplify backup and restores with application-aware, storage-integrated data protection

HPE 3PAR flash-integrated data protection: Reducing risk in the all-flash data center

If you are looking for virtually instant application-consistent availability and protection for your VMware, Microsoft® SQL, Oracle, and SAP HANA® environments, look no further than a rapid and granular backup and recovery with HPE Recovery Manager Central (RMC) software and HPE StoreOnce.

HPE RMC software integrates HPE 3PAR All-Flash arrays with HPE StoreOnce Systems to provide a converged availability and protection for flash environments. It augments traditional backup approaches, combining the performance of snapshots with the protection of backups. As a result HPE RMC offers 23X faster backup and 15X faster restore with no backup impact on the application server.⁵ It enables self-service application managed protection for VMware, Microsoft SQL, Oracle, and SAP HANA environments. What's more, HPE RMC also lowers cost and complexity by helping eliminate the need for a backup application and reduces risk by protecting applications running on HPE 3PAR against storage platform outage, file loss or application corruption beyond the oldest snapshot.

- **HPE 3PAR Gen5 ASIC:** Supports mixed workloads and enables compaction to take place in silicon rather than consuming processing cycles, including inline deduplication that alleviates performance issues that bog down other storage architectures. The HPE 3PAR Gen5 ASIC supports mixed workloads with extremely high-performance levels so that transaction-intensive and throughput-intensive workloads run on the same storage resources without contention.
- **Adaptive read and write technology:** Matches host I/O size reads and writes to flash media at a granular level to avoid unnecessary data reads and writes to reduce latency, enhance backend performance, and extend flash media lifespan to lower the total cost of ownership (TCO) for storage.
- **Autonomic cache offload:** Reduces cache bottlenecks by automatically changing the frequency at which data is offloaded from cache to flash media based on utilization rate. This helps achieve consistently high performance levels as you scale up the workload to millions of IOPS.
- **Multi-tenant I/O processing:** Enables performance improvement for mixed workloads or virtual desktop infrastructure (VDI) deployments by breaking large I/O into smaller chunks so that small read requests don't get held up behind larger I/O requests, which helps ensure reduced latency.
- **Quality of Service (QoS) controls:** Reduces contention and certifies that performance is delivered where you need it to support multi-tenancy. This software lets you quickly and easily assign minimum goals for I/O per second, bandwidth, and latency to protect mission-critical applications in enterprise environments (see sidebar).
- **Adaptive Sparing** leverages the system's sparing approach to improve the performance and endurance of flash. Other architectures often reserve entire drives to use as "hot" spares—these drives are not used unless another drive in the system fails, which is expensive and inefficient. Instead, in the HPE 3PAR architecture, the system reserves a small amount of "spare" space in each drive. HPE 3PAR StoreServ's patented Adaptive Sparing technology takes the spare space and hands it back to the drive's firmware to increase the internal capacity used by the drive for housekeeping tasks. Adaptive Sparing allows the drive to consume all unused space on the drive to extend its internal housekeeping space. Adaptive Sparing technologies are so powerful they can increase SSD endurance while also increasing write performance. Adaptive Sparing is the foundation behind HPE 3PAR StoreServ's unconditional 5-year warranty on all SSDs.⁵

Boost all-flash SAN performance further

When replacing traditional HDD storage or hybrid arrays with all-flash arrays to serve high-performance workloads, it is critical to consider the role of your storage network and confirm that it is not acting as a bottleneck. For example, a typical online transaction processing (OLTP) workload can saturate 8 Gb host FC bandwidth without fully utilizing all of your compute or storage resources. For you to receive the anticipated returns on your all-flash investments, you may need to consider increasing your storage networking performance with Gen5 16 Gb FC technology or even Gen6 32 Gb FC.

HPE 3PAR StoreServ Storage support for 16 Gb FC offers a simple and immediate SAN performance solution. By replacing older 8 Gb FC SAN components with Gen5 16 Gb FC or Gen6 32 Gb FC you can significantly increase I/O bandwidth and IOPS with lower latency for latency-sensitive applications. With older 4 Gbps FC infrastructure end-of-support life (EOL) and 8 Gb FC infrastructure heading to EOL, now is the time to evaluate 16 Gb Gen5 technology or Gen6 32 Gb FC for your flash deployments.

⁵ Available on HPE 3PAR StoreServ 8000 and 20000 systems purchased after June 1, 2015

⁶ Based on HPE testing of backup and restore performance comparison between HPE RMC and traditional backup environments, 2016 and 2017

HPE 3PAR Flash Now: Maintain control of your data for less than the cost of outsourcing it to the public cloud

Are you evaluating the cloud but not sure you're ready to surrender your data? Are you looking to reduce storage costs but don't like the idea of ceding control and stomaching new security risks? Then it's time to look at new ways to plan for acquisition and consumption of your data storage.

HPE 3PAR Flash Now brings public cloud-like economics to your on-premises flash storage deployment.

With this program, you **get only the best of on-premises and cloud** with none of the drawbacks. Retaining total control and uncompromising security for the data you need to keep on-premises but benefit from converting OPEX to CAPEX and a host of other benefits that come with the program, such as non-disruptive, automated data migration and a built-in tech refresh options that keep you up-to-date on the latest flash and data protection technologies.

With HPE 3PAR Flash Now, you'll be up and running with your new all-flash HPE 3PAR StoreServ Storage before you ever pay HPE a cent for your new flash storage infrastructure and you'll only pay pennies per usable gigabyte per month. The program's built-in utility consumption model lets you scale your flash storage use up or down while only paying for what you consume. What's more, you can keep maintaining control of your data for less than the cost of outsourcing it to the public cloud.

Avoid downtime and consolidate with confidence

A unique suite of persistent and encryption technologies power HPE 3PAR StoreServ 8000 Storage in delivering high-availability and Tier-1 resiliency to performance-critical applications:

- **Persistent Cache:** Preserves service levels, so they are not impacted by unplanned component failures—a key requirement for the virtual data center.
- **Persistent Ports:** Allows non-disruptive upgrades to HPE 3PAR StoreServ 8000 Storage systems without relying on multipathing software and without initiating failover. This feature also automatically fails over a front-end controller node port that experiences physical connection loss due to a cable or switch failure in order to preserve service levels.
- **Persistent Checksum:** Ensures end-to-end data integrity, protecting against silent corruption from the host to the storage array.
- **Peer Persistence:** Delivers effortless resilience that comes with VMware vSphere® Metro Storage Cluster (vMSC) certification and support for Microsoft Windows Server® and Microsoft Windows® Hyper-V environments. With Peer Persistence, you can also federate storage across data centers without being constrained by physical boundaries. Automated failover and failback between two sites or data centers are transparent to hosts, which keeps your virtualized deployments seamlessly running even in the event of a disaster. With support for a third data center, the solution provides extreme data Protection. The customers get not only non-disruptive data mobility in case of local storage failure, but also a complete DR plan by replicating the same data to a third site. Peer Persistence configurations provide an excellent high availability solution combined with an efficient disaster recovery solution based on asynchronous periodic replication.
- **Data-at-Rest Encryption:** Protects your data from both internal and external security breaches. If your application or environment requires protection from unauthorized access of the data, then consider the HPE 3PAR StoreServ Data-at-Rest Encryption solution. HPE 3PAR StoreServ models are fully FIPS 140-2 compliant, support intelligent key management, and available with self-encrypting drives (SEDs), where data is encrypted as it is written to the drive. You get peace of mind in knowing that all user data contained on these drives is protected against unauthorized access, regardless of hardware theft, drive failure, or drive retirement. HPE 3PAR Data-at-Rest Encryption supports all of the advanced data services on HPE 3PAR StoreServ Storage.

Affordable, flexible disaster recovery

In order to meet service-level demands for modern IT and cloud environments, high availability and uncompromising data protection are necessary. With HPE 3PAR StoreServ 8000 Storage, you can dramatically reduce the cost of remote data replication and disaster recovery with highly efficient, multi-mode replication across all HPE 3PAR StoreServ models.

HPE 3PAR Remote Copy Software, including support for true asynchronous streaming, allows you to achieve low recovery time objectives (RTOs) and zero-data loss recovery point objectives (RPOs) with complete distance flexibility. In addition, since HPE 3PAR Remote Copy configuration is autonomic, set-up only requires one step so you can protect your data from the start.

Respond effortlessly to unpredictable and changing demands

The one thing we know about the future is that it is unpredictable. So how do you prepare for data growth and new business initiatives in such an environment? You need storage that gives you the power to master the unpredictable. Storage that is scalable and can grow with you. Storage that is adaptable, so it supports a variety of different applications and workloads without sacrificing performance. Storage that supports non-disruptive data mobility, so the right data is in the right place at the right time, and painful data migrations are a thing of the past. And you need it all for a price you can afford.

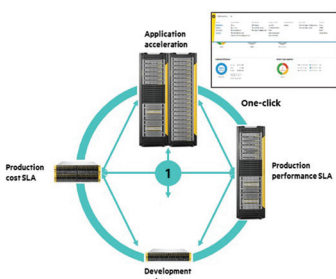


Figure 4. An elastic resource pool with one-click workload balancing

With HPE 3PAR 8000 StoreServ Storage, you get rich storage federation capabilities among all HPE 3PAR StoreServ Storage array models, such as bi-directional data mobility. With this capability, you get the agility and flexibility to run workloads at the right cost and service level with one-click workload rebalancing (Figure 4).

- Non-disruptively shift data between HPE 3PAR StoreServ 8000 Storage and any other HPE 3PAR StoreServ array without additional management layers, appliances, or overhead impact to host resources
- Map workloads to the right resources and establish tiers of storage across a data center for different SLAs
- Lower costs and manage capacity at a data center level by thinly provisioning volumes with the freedom to move data between systems non-disruptively

Refreshing your storage technology is effortless

With HPE 3PAR StoreServ Storage, you can refresh technology effortlessly by streamlining the movement of data from older third-party source systems and non-disruptively update storage without application impact. If you are looking to consolidate your HDS arrays, IBM XIV, EMC VMAX, EMC DMX4 CLARiiON CX4, DMX4 or VNX arrays, HPE 3PAR Online Import Software make it easy for you. Also, Online Import support will be available within SSMC for IBM XIV.

Get more out of your virtualization deployment

HPE 3PAR StoreServ Storage is built to deliver performance that exceeds even the most stringent application demands along with transformative levels of simplicity, agility, and efficiency. Integration with Microsoft System Center and VMware® vCenter™ gives you enhanced visibility into storage resources and precise insight into how VMs are mapped to datastores and system volumes. Support for VMware Virtual Volumes (VVols) enables granular VM-level storage control, disaster recovery, and QoS in environments with VMware vSphere.

Integration with VMware vSphere API for Array Integration (VAAI), VMware vStorage APIs for Storage Awareness (VASA), Microsoft Offload Data Transfer (ODX), and thin provisioning enable HPE 3PAR StoreServ Storage to improve virtual infrastructure performance, efficiency, and scalability. Low latency levels allow you to get more out of your VMware deployment, where extensive use of virtual memory pages to disk can limit VM consolidation on physical servers when paired with legacy storage.

If you are looking for virtually instant application-consistent backups for your VMware environment, look no further than rapid and granular backup and recovery with HPE StoreOnce Backup. With HPE StoreOnce Recovery Manager Central, you get fast, efficient, flat backup from HPE 3PAR StoreServ Storage to HPE StoreOnce Backup. This solution transforms traditional approaches to backup and recovery, giving you application-aware, storage-integrated data protection that bypasses traditional backup server-based processes.

Technical specifications

	HPE 3PAR StoreServ 8200 Converged Flash	HPE 3PAR StoreServ 8400 Converged Flash	HPE 3PAR StoreServ 8440 Converged Flash	HPE 3PAR StoreServ 8450 All-Flash
Controller nodes	2	2 or 4	2 or 4	2 or 4
Maximum total cache	832 GiB	1664 GiB	8384 GiB	384 GiB
Maximum on-node cache	64 GiB	128 GiB	384 GiB	384 GiB
Total flash cache	768 GiB	1536 GiB	8000 GiB	N/A
Maximum number of HDDs	240	576	960	N/A
Maximum number of SSDs	120	240	480	480
Maximum raw capacity	1000 TiB	2400 TiB	4000 TiB	3351 TiB
Maximum raw capacity (SSD only)	838 TiB	1676 TiB	3351 TiB	3351 TiB
Maximum usable file capacity	2.7 PiB	6 PiB	10.8 PiB	9.8 PiB
16 Gbps Fibre Channel host ports	4–12	4–24	4–24	4–24
10 Gbps iSCSI host ports	0–4	0–8	0–8	0–8
10 Gbps FCoE host ports	0–4	0–8	0–8	0–8
1 Gbps Ethernet Adapter	0–8	0–16	0–16	0–16
10 Gbps Ethernet Adapter	0–4	0–8	0–8	0–8
Built-in 1 Gbps ports	2	2–4	2–4	2–4

The complete HPE 3PAR software portfolio



Manage

StoreServ Management Console
Command Line Interface
System Reporter
Service Processor
File Persona
Smart SAN
HPE OneView integration
WSAPI, SMI-S, and SNMP
OpenStack integration
VMware integration
Docker containers support



Protect

Remote Copy
Peer Persistence
Cluster Extension
Recovery Manager Central
Data-at-Rest Encryption
Persistent Checksum
Persistent Cache
Persistent Ports
Virtual Domains
Virtual Lock and File Lock
VSS Provider



Optimize

Adaptive Sparing
Adaptive Flash Cache
Priority Optimization
Federation (Peer Motion, Online Import)
Adaptive Optimization
Express Protect
Adaptive Reads and Writes
Express Writes
Autonomic Cache Offload
Multi-tenant I/O processing
Mixed Workload Technology



Efficient

Zero Detect
Deduplication
Compression
Data Packing
Virtual Copy
Thin Technologies
Express Layout
Express Indexing
Express Scan

Predictive analytics powered by StoreFront Remote

Manage: Everything you need to get up and running quickly and efficiently.

Simplified management is offered by the **HPE 3PAR StoreServ Management Console (SSMC)**. The scriptable **HPE 3PAR Command Line Interface (CLI)** gives you powerful customization capabilities that are simple to configure and reduce the need for extra management tools. **HPE 3PAR System Reporter** helps track performance and capacity utilization trends for multiple HPE 3PAR StoreServ systems. Remote error detection along with support for diagnostics and maintenance activities is offered via **HPE 3PAR Service Processor**. Rich file protocols from SMB/CIFS to NFS and FTP, and a RESTful Object Access API for programmatic access to files are offered with **HPE 3PAR File Persona**. Built-in automated SAN configuration is offered with **HPE 3PAR Smart SAN**. **HPE OneView integration**, gives you a web-based interface that is common across enterprise servers, storage, and networking. Support for the **Storage Management Initiative Specification (SMI-S)** provides simplified storage management from within the Microsoft System Center Management framework. With **OpenStack integration**, over both iSCSI and Fibre Channel protocols, the flexibility and cost-effectiveness of a highly resilient cloud-based open source platform that meets the requirements of your mission-critical applications, is offered. HPE 3PAR StoreServ **integration with VMware vSphere** enables you to take advantage of architectural benefits such as wide striping, a Mesh-Active clustered controller design, mixed workload support, and hardware-assisted VMware vSphere APIs for Array Integration (VAAI) support. **Docker containers support** helps deliver enterprise-grade storage availability, resiliency, and performance for stateful containers.

Protect: Safeguard your most mission-critical of applications.

HPE 3PAR Remote Copy offers simple and cost-effective data protection for efficient multi-tenant disaster recovery. **HPE 3PAR Peer Persistence** ensures transparent autonomic failover over metropolitan distances. **HPE 3PAR Cluster Extension Software** enables automatic failover across data centers using Remote Copy Asynchronous mode. **HPE Recovery Manager Central** allows you to create, manage, and automate crash-consistent snapshots for any application and app-consistent snapshots for VMware vSphere, Microsoft SQL Server, Oracle, and SAP HANA. **HPE 3PAR StoreServ Data-at-Rest Encryption** protects data from both internal and external security breaches by securely encrypting all data as it is written to the drive. End-to-end data integrity, protection against silent corruption from the host to the storage array is offered via **HPE 3PAR Persistent Checksum**. **HPE 3PAR Persistent Cache** maintains service levels, so they are not impacted by unplanned component failures—a key requirement for the virtual data center. Non-disruptive upgrades to HPE 3PAR StoreServ 8000 Storage systems without relying on multipathing software and without initiating failover is initiated via **HPE 3PAR Persistent Ports**. **HPE 3PAR Virtual Domains and HPE 3PAR Virtual Lock Software** helps segregate access and deliver robust storage services for different applications and user groups with additional security attached to the retention of storage volumes. **HPE 3PAR File Lock** enables data preservation to meet the enterprise governance requirements.

Optimize: Make the best use of the available storage capacity.

HPE 3PAR Adaptive Sparing leverages the system's sparing approach to improve the performance and endurance of flash. Performance acceleration is assured by **HPE 3PAR Adaptive Flash Cache**, which reduces application response times. **HPE 3PAR Priority Optimization** assures service levels with QoS controls for mission-critical applications. **HPE 3PAR Peer Motion** enables load balancing at will, wherein movement of data and workloads between arrays does not impact, applications, users, or services. **HPE 3PAR Online Import** is included to enable migration from HPE EVA, EMC, HDS or IBM Storage systems. **HPE 3PAR Adaptive Optimization** improves storage utilization by enabling cost-optimized storage tiering. HPE 3PAR Express Protect enables backups to StoreOnce—all through the familiar RMC GUI. **HPE 3PAR Adaptive Reads and Writes** help to avoid unnecessary data reads and writes to reduce latency, enhance backend performance and extend flash media lifespan. HPE 3PAR Express Writes enhances write acceleration that helps optimize CPU utilization and depending on workload, delivers greater throughput. **HPE 3PAR Autonomic cache offload** helps reduce cache bottlenecks by automatically changing the frequency at which data is offloaded from cache to flash media based on utilization rate. **HPE 3PAR Multi-tenant I/O processing** enables performance improvement for mixed workloads or virtual desktop infrastructure (VDI) deployments by breaking large I/O into smaller chunks so that small read requests don't get held up behind larger I/O requests, ensuring reduced latency.

Efficient: Get maximum performance with minimum expenditure.

HPE 3PAR Zero Detect reduces the cost of storage by identifying and removing repeated data from incoming data streams. **HPE 3PAR Deduplication** helps reduce the amount of flash needed to store data by preventing the storage of duplicate data. **HPE 3PAR Compression** helps reduce the amount of flash needed to store data by reducing the data footprint. **HPE 3PAR Data Packing** helps improve storage efficiency and bandwidth by condensing multiple smaller data sets together. **HPE 3PAR Virtual Copy Software** protects and shares data affordably with rapid recovery using reservationless, non-duplicative, copy-on-write snapshots. **HPE 3PAR Thin Technologies**—including **HPE 3PAR Thin Provisioning, Thin Conversion, Thin Persistence, and Thin Copy Reclamation**—achieve data compaction by leveraging built-in hardware capabilities.

HPE 3PAR Express Layout, allows HPE 3PAR controller nodes to share access to SSDs in order to drive efficiency. **HPE 3PAR Express Indexing** helps deduplicate data inline and with a high degree of granularity. **HPE 3PAR Express Scan** helps remove redundant data inline and prevents wastage of CPU cycles.

HPE Hardware Installation

Provides basic hardware installation of HPE branded servers, storage devices, and networking options to assist you in bringing your new hardware into operation in a timely and professional manner.

HPE Installation and Startup Service

Provides installation and startup of HPE technology including HPE BladeSystem c-Class enclosure, HPE ProLiant and HPE Integrity server blades, storage blades, SAN switch blades, HPE Virtual Connect modules (Ethernet and FC), Ethernet network interconnects, and InfiniBand, as well as the installation of one supported operation system type (Windows or Linux®).

HPE Pointnext

HPE Pointnext provides a comprehensive portfolio including Advisory and Transformational, Professional, and Operational Services to help accelerate your digital transformation. From the onset of your transformation journey, Advisory and Transformational Services focus on designing the transformation and creating a solution road map. Professional Services specializes in creative configurations with flawless and on-time implementation, and on-budget execution. Finally, Operational Services provide innovative new approaches such as HPE Flexible Capacity and HPE Datacenter Care, to keep your business at peak performance. Hewlett Packard Enterprise has an eye on the future to make the complex simple.

HPE Foundation Care Support Service

HPE Foundation Care connects you to Hewlett Packard Enterprise 24x7 for assistance on resolving issues. This service includes available response times of next business day, 4-hour response or 6-hour to repair with answers to software questions within two hours. HPE is a leading manufacturer who makes this level of coverage available as a standard service offering for your most valuable servers. In addition, collaborative software support is included and provides troubleshooting assistance on industry-leading software running on your server. Simplify your support experience and make HPE your first call to help resolve hardware or software problems.

HPE Proactive Care Support Service


HPE Proactive Care gives customers an enhanced call experience. When your products are connected to HPE, we help you prevent problems and maintain IT stability by utilizing personalized proactive reports with recommendations and advice. This service includes available response times of next business day, 4-hour response or 6-hour to repair with answers to software questions within two hours. This service also includes collaborative software support for Independent Software Vendors (ISVs), such as Red Hat®, VMware, Microsoft, and others running on your HPE servers.

HPE Datacenter Care Service

HPE Datacenter Care helps improve IT stability and security, increase the value of IT, and enable agility and innovation. It is a structured framework of repeatable, tested, and globally available services building blocks. You can deploy, operate, and evolve your data center wherever you are on your IT journey. With HPE Datacenter Care, you benefit from a personalized relationship with HPE via a single point of accountability for HPE and others' products.

HPE Flexible Capacity

With Flexible Capacity, you get the speed, scalability, and economics of the public cloud in the privacy of your data center. Gain the advantages of the public cloud—consumption-based payment and rapid scalability without worrying about capacity constraints. Reduce the heavy lifting needed to operate a data center. And retain the advantages that IT provides the business such as control, security, and others. Deliver the right user experience, choose the right technology for the business, manage privacy and compliance, and manage the cost of IT. And, you have the option to use the public cloud when needed.



Make the right purchase decision. Click here to chat with our presales specialists.



Sign up for updates

Learn more at **HPE 3PAR StoreServ 8000**

© Copyright 2015–2017 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Microsoft, Windows, and Windows Server are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. Oracle is a registered trademark of Oracle and/or its affiliates. Red Hat is a registered trademark of Red Hat, Inc. in the United States and other countries. SAP HANA is a trademark or registered trademark of SAP SE in Germany and in several other countries. The OpenStack Word Mark is either a registered trademark/service mark or trademark/service mark of the OpenStack Foundation, in the United States and other countries and is used with the OpenStack Foundation's permission. We are not affiliated with, endorsed or sponsored by the OpenStack Foundation or the OpenStack community. Linux is the registered trademark of Linus Torvalds in the U.S. and other countries. VMware, VMware vSphere, and VMware vCenter are registered trademarks or trademarks of VMware, Inc. in the United States and/or other jurisdictions. All other third-party trademark(s) is/are property of their respective owner(s).