

Overview

HPE Synergy 480 Gen10 Plus Compute Module

HPE Synergy, the first platform built from the ground up for Composable Infrastructure, offers an experience that empowers IT to create and deliver new value instantly and continuously. It is a single infrastructure that reduces operational complexity for traditional workloads and increases operational velocity for the new breed of applications and services. Through a single interface, HPE Synergy composes physical and virtual compute, storage, and fabric pools into any configuration for any application. As an extensible platform, it easily enables a broad range of applications and operational models such as virtualization, hybrid cloud, and DevOps. With HPE Synergy, IT can become not just the internal service provider but the business partner to rapidly launch new applications that become the business.

HPE Synergy supports new two-socket compute modules which provide the performance, scalability, density optimization, storage simplicity, and configuration flexibility to power a variety of workloads, including business processing, IT infrastructure, web infrastructure, collaborative, and high-performance computing. The HPE Synergy 480 Gen10 Plus Compute Module delivers superior capacity, efficiency, and flexibility in a two-socket, half-height form factor to support demanding workloads. Powered by the latest Intel® Xeon® Scalable processors, HPE DDR4 Smart Memory supporting up to 4TB per processor, flexible storage controller options, three I/O connectors, and designed to create a pool of flexible compute capacity within a composable infrastructure the HPE Synergy 480 Gen10 Plus Compute Module is the ideal platform for general-purpose enterprise workload performance now and in the future.


Get the right balance of performance, flexibility, and density for your traditional or new style of business applications. The HPE Synergy 480 Gen10 Plus Compute Module delivers even more choice of performance, capacity and flexibility to meet your workload needs. Powered with newest Intel® Xeon® Scalable processors, HPE Smart Memory, more storage solutions and capacity, unique Smart Arrays and new GPU options the Synergy 480 Gen10 Plus Compute is ideal to fit any workload you have, now and in the future

HPE Synergy offers additional compute module options (that have individual QuickSpecs) including:

HPE Synergy 660 Gen10 (2-4-socket, general purpose)

- **Notes:** This product will not be updated and will continue through to EOL 3Q2023 with Synergy Intel Cascade Lake programs.
- This QuickSpecs document focuses on the HPE Synergy 480 Gen10 Plus Compute Module.
- **Notes:** The HPE Synergy Gen10 Plus compute modules installation involves a minimum upgrade requirement for component compatibility purposes. To ensure proper system functionality, you must update your system to Release Set Version 3.00.20170707 (or later) before installing and operating your compute module.
- **Go to:** <http://www.hpe.com/downloads/synergy>.

Overview

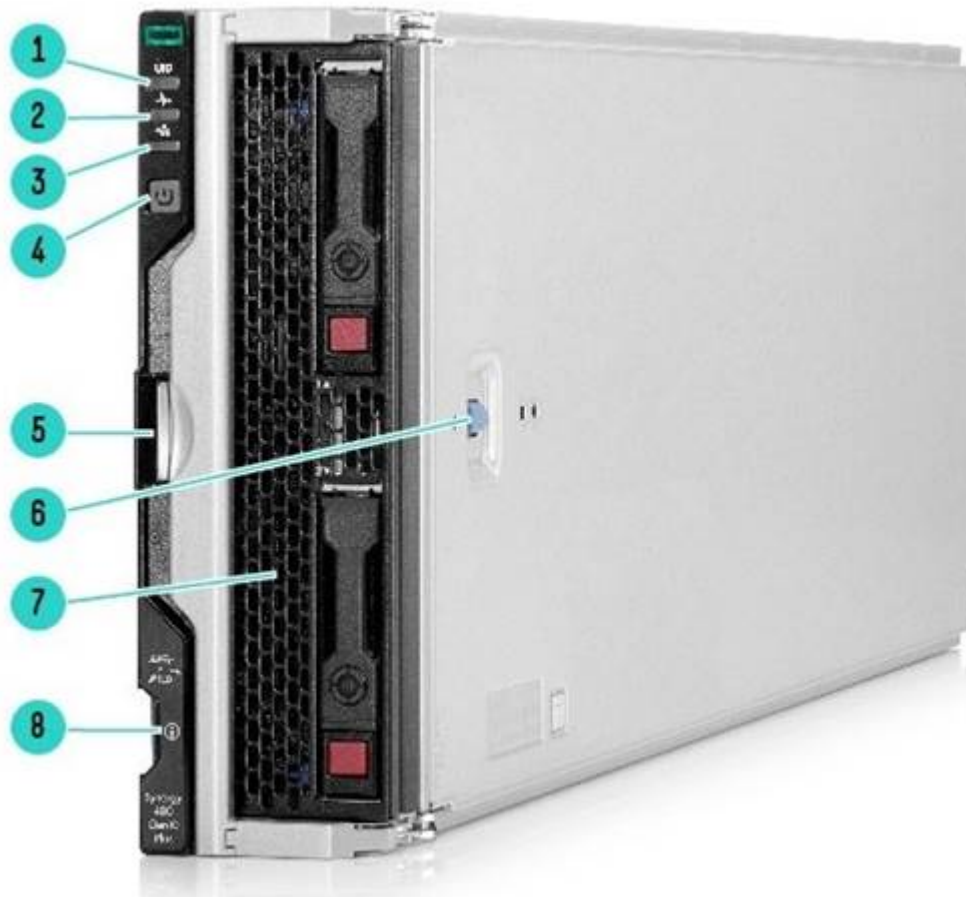

Front View - HPE Synergy 480 Gen10 Plus Compute Module


- | | |
|--|--|
| 1. UID LED | 5. Compute Module handle release latch |
| 2. Health Status LED | 6. Quick Access Panel |
| 3. Mezzanine NIC status LED | 7. Removable drive cage ¹ |
| 4. Power On/Stand by button and system power LED | 8. Pull Out Label ² |

Notes:

–¹Options for 2, 4 drive bays, drive less or single PCIe slot GPU options.

–²Tab used for ID information on product. External USB 3.0 connector & iLO USB connection (behind serial label pull tab)

Overview

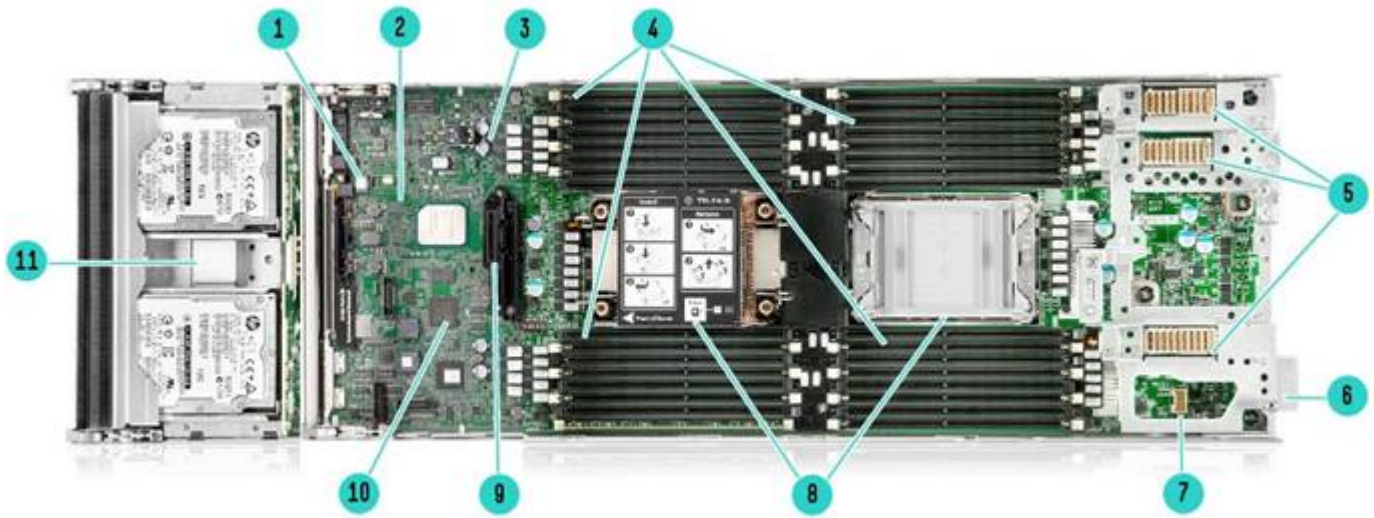

Synergy 480 Gen10 Plus Compute Module (Drive Cage removed)

- | | |
|--|--|
| 1. Single microSD Slot | 6. Compute Module Power and Management connector |
| 2. TPM connector ² | 7. Smart Array Energy Pack connection |
| 3. USB 3.0 ³ | 8. Up to two (2) Gen3 Intel® Xeon® Scalable Family processors |
| 4. Thirty Two (32) DDR4 DIMM memory slots ⁴ | 9. Connection point for Optional Drive Cage solutions ⁶ |
| 5. Mezzanine connectors ⁵ (3 x16 PCIe 4.0) | 10. iLO chipset ² |
| | 11. Selectable front cage options ¹ |

Notes:

- ¹2x Drive bays(SAS/SATA), 4x Drive Bays(4x NVMe or 2x NVMe + 2x SAS/SATA), Drive less or Single PCIe Cage for select GPU options.
- ²Under drive cage
- ³Boot port under drive cage (mSD or USB)
- ⁴16 per processor
- ⁵3 x16 PCIe 4.0
- ⁶Including Dual M.2 Boot Drive HW RAID1 Boot Solution. (HPE NS204i-d Gen10+ Boot Controller connects under drive cage)

What's New

- Synergy 480 Gen10 Plus designed to provide increased performance and capacity.
- New Optional Drive Cage options for 2, or 4 Drive and Drive-less for your needed SAN and VSAN workloads.
- HPE NS204i-d Gen10+ Boot Controller with two M.2 480GB drives included designed for VMware HW RAID Requirements - operates with most of the drive cages options (all delivered as Factory Installed or sold as customer installable options).
- New PCIe GPU Front Cage option for single GPU workloads, plus New GPU PCIe Expansion Modules for 2, 4 and 8 standard PCIe GPUs
- Intel® 3rd Generation of Xeon® Scalable Family of processors
- 32 Memory DIMMs for up to 16 per processor up to 4TB Max, 8GB to 256GB Capacities @ speeds up to 3200MT/s
- PCIe 4.0 throughout the module to provide the best performance for Boot, Storage and IO.
- Regional Certifications including Energy Star, EU Lot 9, and Top Runner - Japan Fully Compliant.

Overview

ErP Lot9 Quick Summary

The European Parliament (ErP) is responsible for setting the ecological standards for products that are imported into the EU. The European Parliament Commission Regulation 2019/424 (also known as the ErP Lot 9 regulation) are a new set of product standards that deal with servers and data storage devices and goes into effect on March 1, 2020. Products that are not compliant with Lot 9 requirements cannot be imported into the European Union after March 1, 2020. For details see Tech Specs section of this document. See Configure to Order section for details on configurable options.

SY480 Gen10 Plus meets Lot9 in all configurations

For additional information, please visit: <https://www.hpe.com/us/en/about/environment/msds-specs-more.html> .

Documents provided by HPE: Lot 9 Declarations, White paper, and FAQ.

Platform Information

Form Factor

- Single Slot Blade - Half-Height

Chassis Types

- Single Compute chassis for CTO
- 2 SFF Drive Cage Option(CTO/BTO), same as in use for Gen10
- 4 SFF NVMe Drive Cage solution with options for 2x NVMe and 2x SATA/SAS, (with new MicroChip Smart RAID P416ie-m controller).
- Drive Less Cage Option
- Front PCIe Enablement Kit

System Fans

- Come with Frame by default and not this product.

Synergy Gen10 Plus - Front Cage Options

With introduction of Gen10 Plus, Synergy has moved to a single base chassis with multiple selectable drive and controller option kits. These options include multiple **Front Cage options** for boot, storage, or single system GPUs.

Notes:

- The Front Cage options are offered as factory installed and BTO options offered for later field updates.
- One of the below Drive Chassis options is required to ship to any customer
- This Drive Cage solution along with it options are available as a BTO option for either Gen10 or Gen10 Plus Compute Field installations/updates.



HPE SY480 Gen10 Plus Standard 2Drive Kit

1. SAS/SATA or uFF

Overview

A two drive SAS/SATA Drive Cage Option for Boot and Store requirements.

Notes: This Drive Cage requires options of Essential RAID Controller(HBA): HPE Smart Array E208i-c SR Gen10 12G SAS Modular Controller(8 internal lanes/no cache), or Performance RAID Controller (Smart Array): HPE Smart Array P204i-c SR Gen10 12G SAS Modular Controller(4 internal lanes/1GB cache) or single HPE Synergy Compute Chipset SATA FIO Board Kit for SATA drive use only (this solution is non-compatible with the HPE NS204i-d Gen10 Plus M.2 HW RAID Boot Controller).



HPE SY480 Gen10 Plus Premium 4Drive Kit


1. NVMe, SAS/SATA or uFF
2. NVMe always

A four drive solution that has an option for 4x NVMe Direct Connect Drives, or a 2x NVMe(bottom two shown) and 2x SAS/SATA drive solution.(Top two shown)

Notes:

- May be set at factory to 4 NVMe drive solution with HPE SY480 Gen10+ 4SFF Direct Cbl Opt Kit included, or 2x NVMe (Direct Connect) and 2x SAS/SAS solution with HPE SY480 Gen10+ SlimSAS Cable Opt Kit to connect to MicroChip Smart RAID P416ie-m Gen10 Plus Mezz Controller.
- HPE 480 Gen10 Plus Premium 4Drive Kit - Scheduled for September Release

For more details check your local sales office or see more details below in this QuickSpecs

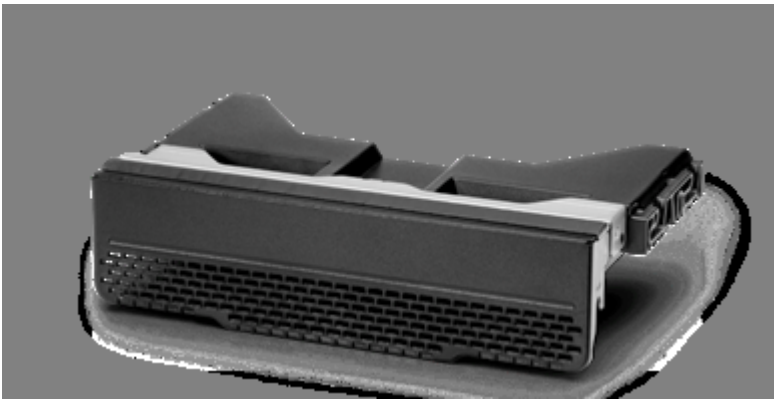

HPE Synergy 480 Gen10 Plus without Drive less Front Cage Kit

A Drive less solution is for when no onboard storage is needed for Boot from SAN solutions or with the new HPE NS204i-d Gen10 Plus M.2 Controller solution is used.

For more details look further down in this QuickSpecs.

Overview



HPE SY480 Gen10 Plus PCIe Slot Option Front Cage

A single PCIe Slot Option Front Cage for single purpose GPU.

For more details look further down in this Quick Spec, or check the HPE GPU options documents.



HPE NS204i-d Gen10 Plus M.2 Boot Controller

The NS204i-d Gen10 Plus M.2 Boot Controller is a redesign New HPE M.2 option is a HW RAID Solution - 2x 480GB M.2 NVMe Drives included with Option for Mirrored RAID.

Notes:

- May be used with any drive cage option above, except when HPE Synergy Compute Chipset SATA FIO Board Kit in 2 Drive Cage. May be selected as a CTO or BTO Option
- This option is a redesign for Synergy PCIe direct connect based on the HPE NS204i-p Gen10+ Boot Device PCIe card option for ProLiant Family

Overview

Notes:

– Boot Devices Advisory for USB/SD with VMware 7.0 U2 and beyond:

o Background:

- VMware; at 7.0 U1, made changes in the Boot/Store format to better manage IO growth. The format change of the ESX-OSDATA boot data partition was from FAT to a VMFS-L. The new format allows for faster IO to the scratch partition, allowing an overwhelming level of IO traffic to flow and some Hosts may become unresponsive or boot bank not found on boot devices like USB/SD cards.

o Issue:

- The host (USB/SD with ESXi) goes into an unresponsive mode due to "Bootbank cannot be found in the path" and the boot device is in an APD (All Paths Down) state. In some cases the Host goes to non-responsive state and shows disconnected from VCenter.

o Options for HPE Customers @ Next Update:

- When the customer decides to upgrade to VMware Next or beyond ESXi 7.0 U2c Update Release, VMware will deprecate any USB/SD drive and already recommends the customer use alternative High Endurance SSD's for "Boot & Store partitions."

o HPE Synergy recommends that customer move to alternative Boot & Store solutions as well, examples below:

- With any SY480 Gen10 move from USB/SD Boot & Store devices to HPE 2x Drive Cage solution(P36675-B21), with HPE Smart Array P204i-c SR Gen10 12G SAS Modular Controller(804424-B21) Smart Array or HPE Smart Array E208i-c SR Gen10 Ctrlr (823852-B21) and additional Drives.
 - With SY480 Gen10 Plus servers you have the options to move from USB/SD Boot & Store devices to an HPE NS204i-d SY Gen10 Plus NVMe PCIe3 M.2 OS Boot Device (w/ 2x M.2 NVMe 480GB Drives) and/or
 - HPE 2x Drive Cage solution (P36675-B21), with HPE Smart Array P204i-c SR Gen10 12G SAS Modular Controller (804424-B21) Smart Array and additional SSD Drives. Options for Gen10 Plus and Gen10.
-

Standard Features

Synergy Management

HPE Composer powered by OneView

Notes: [Read and learn more about OneView](#)

On Compute Management Chipset

HPE iLO 5 ASIC

Notes: [Read and learn more in the iLO QuickSpecs](#)

Processors

Synergy 480 Gen10 Plus is designed and consumes on Intel Xeon Scalable Family Generation 3 processors(x3xx)

Up to 2 of the following..

Notes:

- The 2nd digit of the processor model number "x3xx" is used to denote the processor generation (i.e. 3 = 3rd generation).
- This table covers the public Intel offering only.

For more information regarding Intel Xeon processors, please see the following:

<http://www.intel.com/xeon>.

Intel Xeon Processor		
Processor Suffix	Description	Offering
N	NFV/Networking Optimized	SKUs specifically designed for NFV and networking workloads, such as: L3 fwding, 5G UPF, OVS DPDK, VPP FIB router, VPP IPsec, web server/NGINX, vEPC, vBNG, and vCMTS. SKUs have higher base frequency with lower TDPs to enable best performance/Watt Up to 4. TB addressable memory per socket
P	High performance IaaS	Optimized for orchestration efficiency, IaaS higher frequency for VM markets
S	Max SGX Enclave	Supports Software Guard Extensions maximum enclave size (512GB)
V	High VM Density	Optimized for orchestration efficiency and high density, lower power VM environments
Y	Speed Select - Performance Profile	Intel® SST-PP (performance profile) provides the ability to set a guaranteed base frequency for a specific number of cores, and assign this performance profile to a particular application/workload to guarantee performance requirements. Also enables configuration of settings during runtime and provides additional frequency profile arrangement opportunities.
M		Optimized around AVX frequencies to deliver better performance/Watt around Media, AI and HPC workloads.

Notes:

- 4.0TB maximum RAM per socket.
- PCIe 4.0 lanes.

Standard Features

- 1.5 MB L3 cache/core, except on 6354 and 6346 processors (2.16 and 2.25 MB L3/core respectively).
- Intel SST-CP (Core Power)- Enables flexibility for workloads that benefit from higher base frequency on a subset of the processor's cores. While the max turbo frequency across the cores remain constant across the cores, a subset of the cores can be assigned as to run at a higher base frequency than specified, while the other cores run at lower base frequency.
- Intel SST-TF (Turbo Frequency)- Enables flexibility for workloads that benefit from higher turbo frequency on a subset of the processor's cores. While the base frequency remains constant across the cores, a subset of the cores can be assigned to run at a higher turbo frequency than specified, while the other cores run at lower turbo frequency.
- Intel SST-BF (Base Frequency)- Allows the configuration of a guaranteed higher base frequency, for a specific number of cores, to support those workloads and applications that are not optimized for turbo frequencies.
- Intel Speed select SST-BF, SST-TF, SST-CP supported on Gold and Platinum processors. Power Profile (SST-PP) only supported on Y processors.

3 rd Generation Intel® Xeon® Scalable Processor Family							
Intel Xeon Models	CPU Frequency (GHz)	Cores	L3 Cache (MB)	Power (Watts)	UPI (GT/s)	DDR4 (MT/s)	SGX Enclave size (GB)
Platinum 8380 Processor	2.3	40	60	270	3 @ 11.2	3200	512
Platinum 8368 Processor	2.4	38	57	270	3 @ 11.2	3200	512
Platinum 8362 Processor	2.8	32	48	265	3 @ 11.2	3200	512
Platinum 8360Y Processor	2.4 2.5 2.6	36 32 24	54	250 250 220	3 @ 11.2	3200	64
Platinum 8358P Processor ¹	2.6	32	48	240	3 @ 11.2	3200	8
Platinum 8358 Processor	2.6	32	48	250	3 @ 11.2	3200	64
Platinum 8352Y Processor	2.2 2.3 2.6	32 24 16	48	205 185 185	3 @ 11.2	3200	64
Platinum 8352V Processor ^{1,2}	2.1 2.0 2.0	36 32 24	54	195 180 155	3 @ 11.2	2933	8
Platinum 8352S Processor ²	2.2 2.3 2.6	32 24 16	48	205 185 185	3 @ 11.2	3200	512
Platinum 8352M Processor	2.3	32	48	185	3 @ 11.2	3200	512

Notes:

- 8-Channel DDR4 @ 3200 MT/s (lower DDR4 speed may be used in segment optimized processors (i.e. Cloud, NFV, etc).
- 2 socket capable, 3 UPI @ 11.2 GT/s.
- Advanced RAS (except 8358P), AVX-512 2 FMA, SGX 64GB, TME-MT 64 keys.
- Limited Support for all Optane 200 Series Memory
- ¹Deterministic base frequency rating only applicable to VM workloads. Other workloads may see throttling.
- ²Supports Intel® Speed Select Performance Profile (SST-P), even though not being a "Y" processor.

Standard Features

3rd Generation Intel® Xeon® Scalable Processor Family							
Intel Xeon Models	CPU Frequency (GHZ)	Cores	L3 Cache (MB)	Power (Watts)	UPI Lanes (GT/s)	DDR4 (MT/s)	SGX Enclave size (GB)
Gold 6354 Processor	3.0	18	39	205	3 @ 11.2	3200	64
Gold 6348 Processor	2.6	28	42	235	3 @ 11.2	3200	64
Gold 6346 Processor	3.1	16	36	205	3 @ 11.2	3200	64
Gold 6342 Processor	2.8	24	36	230	3 @ 11.2	3200	64
Gold 6338N Processor ¹	2.2	32	48	185	3 @ 11.2	2667	64
Gold 6338 Processor	2.0	32	48	205	3 @ 11.2	3200	64
Gold 6336Y Processor	2.4 ²	24 ²	36	1852	3 @ 11.2	3200	64
	2.9	12		150			
	3.1	8		150			
Gold 6334 Processor	3.6	8	18	165	3 @ 11.2	3200	64
Gold 6330N Processor ¹	2.2	28	42	165	3 @ 11.2	2667	64
Gold 6330 Processor	2.0	28	42	205	3 @ 11.2	2933	64
Gold 6326 Processor	2.9	16	24	185	3 @ 11.2	3200	64

Notes:

- 8-channel DDR4 @ 3200 MT/s (lower DDR4 speed may be used in segment optimized processors (i.e. NFV, etc).
- 2 sockets capable, 3 UPI @ 11.2 GT/s.

– Advanced RAS, AVX-512 2 FMA, SGX 64GB, TME-MT 64 keys.

– Limited Support for all Optane 200 Series Memory

– ¹Deterministic base frequency rating only applicable for NFV workloads. Other workloads may see throttling.

– ²Default Speed Select Performance Profile value.

3rd Generation Intel® Xeon® Scalable Processor Family							
Intel Xeon Models	CPU Frequency (GHz)	Cores	L3 Cache (MB)	Power (Watts)	UPI Lanes (GT/s)	DDR4 (MT/s)	SGX Enclave size (GB)
Gold 5320 Processor	2.2	26	39	185	3 @ 11.2	2933	64
Gold 5318Y Processor	2.1 ³	24 ³	36	165 ³	3 @ 11.2	2933	64
	1.9	24		150			
	2.0	22		150			
Gold 5318S Processor ¹	2.1 ³	24 ³	36	165 ³	3 @ 11.2	2933	512
	1.9	24		150			
	2.0	22		150			
Gold 5318N Processor ^{1,2}	2.1 ³	24 ³	36	150 ³	3 @ 11.2	2667	64
	2.0	20		135			
Gold 5317 Processor	3.0	12	18	150	3 @ 11.2	2933	64
Gold 5315Y Processor	3.2 ³	8 ³	12	140 ³	3 @ 11.2	2933	64
	3.2	6		125			
	3.4	4		115			

Notes:

Standard Features

- 8-channel DDR4 @ 2933 MT/s (lower DDR4 speed may be used in segment optimized processors (i.e. NFV, etc).
- 2 sockets capable, 3 UPI @ 11.2 GT/s.
- Advanced RAS, AVX-512 2 FMA, SGX 64GB, TME-MT 64 keys.
- Limited Support all Intel Optane 200 Series Memory
- ¹Supports Intel® Speed Select Performance Profile (SST-P), even though not being a "Y" processor.
- ²Deterministic base frequency rating only applicable for NFV workloads. Other workloads may see throttling.
- ³Default Speed Select Performance Profile value.

3rd Generation Intel® Xeon® Scalable Processor Family							
Intel Xeon Models	CPU Frequency (GHz)	Cores	L3 Cache (MB)	Power (Watts)	UPI Lanes	DDR4 (MT/s)	SGX Enclave size (GB)
Silver 4316 Processor	2.3	20	30	150	2 @ 10.4	2667	8
Silver 4314 Processor ¹	2.4	16	24	135	2 @ 10.4	2667	8
Silver 4310 Processor	2.1	12	18	120	2 @ 10.4	2667	8
Silver 4309Y Processor	2.8 ²	8 ²	12	105 ²	2 @ 10.4	2667	8
	2.6	8		95			
	2.3	8		85			

Notes:

- 8-channel DDR4 @ 2667 MT/s.
- 2 sockets capable, 2 UPI @ 10.4 GT/s.
- Standard RAS, AVX-512 2 FMA, SGX 8GB, TME-MT 64 keys.
- ¹Does not support Intel Optane 200 Series Memory (working future resolution)
- ²Default Speed Select Performance Profile value

Chipset

Intel C621A Chipset

Notes: For more information regarding Intel® chipsets, please see the following URL:
<https://www.intel.com/content/www/us/en/products/chipsets/server-chipsets.html>

System Management Chipset

HPE iLO 5 ASIC

Notes: Read and learn more in the [iLO QuickSpecs](#).

Memory

Standard Features

Type	HPE DDR4 SmartMemory	Registered (RDIMM), Load Reduced (LRDIMM)
DDR4 DIMM Slots Available	32	16 DIMM slots per processor, 8 channels per processor, 2 DDR4 DIMMs per channel
Maximum capacity (LDIMM)	8.0 TB	32 x 256 GB LRDIMM @ 3200 MT/s
Maximum capacity (RDIMM)	2.0 TB	32 x 64 GB RDIMM @ 3200 MT/s
Maximum capacity (Optane & DDR4 Memory)	12.0 TB	16 x 512 GB Intel Persistent Memory 200 Series for HPE plus 16 x 256GB HPE DDR\$ Memory

Notes:

- All processors support up to 4TB memory per socket.
- Mixing of RDIMM and LRDIMM memory is not supported.
- To realize the performance memory capabilities listed in this document, HPE DDR4 SmartMemory is required.
- For additional information, please see the [HPE DDR4 Smart Memory QuickSpecs](#).
- Intel Persistent Memory 200 series only supported on Gold and Platinum Processors.
- For General Server Memory and Persistent Memory Population Rules and Guidelines for Gen10 Plus see details here: <http://www.hpe.com/docs/memory-population-rules>

Memory Protection

Memory RAS Technologies

HPE Fast Fault Memory

Notes: For information please refer to:

[Memory RAS technologies for HPE ProLiant/Synergy/Blade Gen10 servers with Intel Xeon Scalable processors technical white paper](#)

Advanced ECC

Advanced ECC uses single device data correction to detect and correct single and all multibit error that occurs within a single DRAM chip.

Online Spare

Memory online spare mode detects a rank that is degrading and switches operation to the spare rank.

Notes: For more information see our [Memory RAS feature technical whitepaper](#).

Standard Features

Memory

One of the following depending on model

The following memory supports Intel® Xeon® Scalable Family processors 3rd generation (Models x3xx)

- HPE 8GB (1x8GB) Single Rank x8 DDR4-3200 CAS-22-22-22 Registered Smart Memory Kit
- HPE 16GB (1x16GB) Single Rank x4 DDR4-3200 CAS-22-22-22 Registered Smart Memory Kit
- HPE 16GB (1x16GB) Dual Rank x8 DDR4-3200 CAS-22-22-22 Registered Smart Memory Kit
- HPE 32GB (1x32GB) Dual Rank x4 DDR4-3200 CAS-22-22-22 Registered Smart Memory Kit
- HPE 32GB (1Rx4) Dual Rank x4 DDR4-3200 CAS-22-22-22 Registered Smart Memory Kit
- HPE 64GB (1x64GB) Dual Rank x4 DDR4-3200 CAS-22-22-22 Registered Smart Memory Kit
- HPE 128GB (1x128GB) Quad Rank x4 DDR4-3200 CAS-22-22-22 LRDIMM Smart Memory Kit
- HPE 256GB (1x256GB) Octal Rank x4 DDR4-3200 CAS-26-22-22 3DS LRDIMM Smart Memory Kit

Notes: Important: Empty memory slots require DIMM Slot Blanks for improved thermal control. (HPE DDR-4 DIMM Blanks Kit, P07818-B21)

HPE memory from previous generation servers (DDR3) is not compatible with this compute module. HPE DDR4 Smart Memory is required to realize the memory performance improvements and enhanced functionality listed in this document for Gen10. Please see Memory Speed Tables for memory speed changes based on processors selected.

For additional information, please see the [HPE DDR4 Smart Memory QuickSpecs](#).

Notes:

- The 128 GB LRDIMM may not be mixed with other DIMM capacities/types.
- LRDIMM and RDIMM are distinct memory technologies and cannot be mixed within a compute module.

Memory Protection

- **Advanced ECC**
Advanced ECC uses single device data correction to detect and correct single and all multibit error that occurs within a single DRAM chip.
- **Online Spare**
Memory online spare mode detects a rank that is degrading and switches operation to the spare rank.
- **Online Mode**
Memory Online Spare Mode (Rank Spare Mode)

Notes:

- For details on the HPE Server Memory Options RAS feature, visit: <http://www.hpe.com/docs/memory-ras-feature>
- For additional information, please see the [HPE Smart Memory QuickSpecs](#).

– LRDIMM and RDIMM are distinct memory technologies and cannot be mixed within a compute module.

– For the latest information on [Memory Speed](#).

If you want to know more about the memory, reference the [RAS feature whitepaper](#).

Intel Optane 200 Series Memory for HPE

Optane or Persistent Memory provides a unique combination of affordable larger capacity and support for data persistence. With innovative technology offering distinctive operating modes, it adapts to your needs across workloads.

- Boost Performance with Data Persistence
- PMem gives you access to more data in memory enabling you to process large amounts of data faster. Unlike DRAM, data remains in PMem allowing you to retain data even when powered off - helping protect your systems from data loss.
- Greater Memory Capacity
- Optane™ PMem enables you to affordably increase your memory capacity per socket, extract value from larger data sets and increase the utility of each server.

Standard Features

- Flexible Configuration with Two Modes
- Operational mode in Optane™ Persistent Memory provides flexible configuration of Memory Mode.

Hardware

Hardware Encryption. Intel® Optane™ persistent memory incorporates hardware encryption. With AES 256-bit encryption, it helps protect data at rest from cyberattacks with minimal impact on performance.

Options to choose from are

- Intel Optane 128GB persistent memory 200 Series for HPE
- Intel Optane 256GB persistent memory 200 Series for HPE
- Intel Optane 512GB persistent memory 200 Series for HPE

Notes:

- A maximum of 8 HPE Persistent Memory Kits per socket are supported on the following 3rd Generation Intel Xeon Scalable Processor series (Platinum 83xx, Gold 63xx/53xx and Silver 4314).
- Supported on quantities of 1, 2, 4 or 8 per socket.
- Not supported with HPE 48VDC Power Supply
- Not supported with 4 Drive Cage option

For additional information regarding HPE Persistent Memory Population Rules and Guidelines for Gen10 Plus visit: <http://www.hpe.com/docs/memory-population-rules>.

System requirements

Notes: Hewlett Packard Enterprise recommends that you implement best practice configurations for high availability (HA) such as clustered configurations.

The following hardware components are required for a complete Synergy Solution:

- HPE SY480 Gen10 Plus with Third -generation Intel Xeon Scalable processors
- HPE DDR4 Standard Memory RDIMMs or LRDIMMs
- Boot and Storage solutions
- Network and IO Mezzanine
- Synergy 12000 Frame
 - Composer/OneView
 - Network and IO InterConnect Modules

Supported firmware versions:

- Latest System ROM version
- Server Platform Services (SPS) Firmware latest version
- HPE iLO Firmware latest version
- HPE Innovation Engine Firmware latest version.

Operating Systems and Virtualization Software Support

- Microsoft Windows Server
- Microsoft Hyper-V Server
- Red Hat Enterprise Linux
- SUSE Linux Enterprise Server
- VMware ESXi
- VMware vSphere

Notes: Operating System support may change. To get the most updated information, please go to the HPE OS Support Matrix at: <http://www.hpe.com/info/ossupport>

Standard Features

Client OS

With GPU Options Only

- Windows & Enterprise Client OS
- Red Hat Enterprise Linux Desktop/Workstation
- SLES Desktop (64 bit - includes XEN &KVM)

Notes: For Operating Systems tested with the GPU options, please see the Graphics Adapter QuickSpecs for details <https://h20195.www2.hpe.com/v2/getdocument.aspx?docname=a00016718enw>

Mezzanine Connectors (PCIe 4.0)

Three (3) I/O expansion mezzanine connectors:

- **Mezzanine 1 -- x16 PCIe 4.0 Type D**

– Supports Type C and Type D mezzanine cards

Notes: This mezzanine connector supports dual-port mezzanine cards: one port is routed to interconnect module bay 1 and the other to bay 4.

- **Mezzanine 2 -- x16 PCIe 4.0**

– Supports Type C and Type D mezzanine cards

Notes:

– This mezzanine connector supports dual-port mezzanine cards: one port is routed to interconnect module bay 2 and the other to bay 5.

– A second processor must be installed (in processor slot 2) to have access to mezzanine connector 2.

- **Mezzanine 3 -- x16 PCIe 4.0**

– Supports Type C mezzanine cards

Notes: This mezzanine connector supports dual-port mezzanine cards: one port is routed to interconnect module bay 3 and the other to bay 6.

Network & Storage Adapters or Mezzanine options include:

- HPE Synergy 4820C 10/20/25Gb CNA Converged Network Adapter
- HPE Synergy 6820C 25/50Gb CNA Converged Network Adapter
- HPE Synergy 5330C 32G Fibre Channel Host Bus Adapters
- HPE Synergy 5830C 32G Fibre Channel Host Bus Adapters

Notes: Please refer to the Fabric/Network Options Quick Specs for more details.

HPE Compute Module ROM

HPE ROM (read only memory) is now digitally signed using the HPE Corporate Signing Service. As part of the Secure Start, this signature is verified before the flash process starts, reducing accidental programming and preventing malicious efforts to corrupt system ROM.

HPE ROM provides for essential initialization and validation of hardware components before control is passed to the customer-installed operating system. The ROM also provides the capability of booting from various fixed media (HDD, CD-ROM) and removable media (USB), to continue operation to the operating system.

HPE ROM performs very early configuration of the video controller, to allow monitoring of initialization progress via an attached monitor. If configuration or hardware errors are discovered during this early phase of hardware initialization, suitable messages are now displayed on the connected monitor. Additionally, these configuration or hardware errors are logged to the Integrated Management Log (IML) to assist in diagnosis.

Standard Features

HPE Synergy Compute ROM is used to configure the following:

- Processor and chipset status registers
- System memory, memory map, and memory initialization
- System hardware configuration (integrated PCI devices and optional PCIe Mezzanine cards).
- Customer-specific BIOS configuration using the UEFI System Utilities.

Notes: For further information, please refer to the https://support.hpe.com/hpsc/doc/public/display?docId=a00016407en_us_en

Storage Drive cages and Controllers

One of the following depending on model

Drive Cage Options

HPE SY480 Gen10 Plus Standard 2Drive Kit

- Supports 2 SFF SAS or SATA Drives and/or up to 2 of the uFF Dual Drive options.
- Requires one E208i-c HBA or P204i-c HPE Smart Array controllers and either one of below:

– Gen10 SATA Board Kit (872955-B21) or

– NS204i-d Gen10 Plus M.2 Boot Controller option

Notes: NS204i-d Gen10 Plus M.2 option works with either controller above, except HPE Synergy FIO Gen10 SATA Board Kit (872955-B21).

HPE SY480 Gen10 Plus Premium 4Drive Kit

- Supports 4x SFF NVMe (requires P29009-B21, HPE SY480 Gen10+ 4SFF Direct Connect Cable Option Kit)
- Supports 2x2 Drive Options. 2x NVMe and 2x SAS/SATA Drives (requires P29010-B21, HPE SY480 Gen10 Plus SlimSAS Cable Option Kit + P38721-B21, MicroChip Smart RAID P416ie-m x16 Lanes 2GB Cache SAS 12G Controller for HPE for connection)
- Works with HPE NS204i-d Gen10+ Boot Controller for HPE (does not work with HPE Synergy FIO Gen10 SATA Board Kit, 872955-B21).

HPE SY480 Gen10 Plus Drive Less Kit

- Designed for the Stateless or No Drive solution where customer boots from SAN or alternate boot & store devices such and the new HPE NS204i-d Gen10+ M.2 Boot Controller.
- Designed for those use cases where you need a single GPU.

Notes: can be used with with HPE NS204i-d Gen10+ M.2 Boot Controller

Software RAID Solutions

HPE Smart Array S100i SR Gen10 SW RAID

Notes:

– HPE Smart Array S100i SR Gen10 SW RAID is off by default and can be enabled RBSU.

– For legacy support select Legacy mode settings part, 758959-B22.

Hardware RAID solutions

NVMe Boot Devices - HW RAID

- HPE NS204i-d Gen10 Plus Boot Controller for HPE

Notes: Direct PCIe connection below drive cages and comes complete with 2x M.2 NVMe 480GB Drives ready for Boot.

Essential RAID Controller

- HPE Smart Array E208i-c SR Gen10 12G SAS Modular Controller (8 internal lanes/no cache)
-

Standard Features

Performance RAID Controller

- HPE Smart Array P204i-c SR Gen10 12G SAS Modular Controller (4 internal lanes/1GB cache)
- HPE MicroChip Smart RAID P416ie-m SR Gen10 12G SAS Mezzanine Controller (8 internal 8 external lanes/2GB cache for use with with Synergy D3940 Storage Modules, as well as, 4 Drive front cage for SAS/SATA drives)

Premium Backplane CTO Compute Module

- CTO offers a Premium Backplane Compute Module for use with up to 4 NVMe drives in front drive cage. Or, supports 2x NVMe drives and 2 SAS drives with MicroChip Smart RAID P416ie-m (P38721-B21) with specific SAS cable connections allowing MicroChip Smart RAID P416ie-m (P38721-B21) to manage 2x SATA or SAS drives in both front drive cage as well as any drives on the Synergy D3940 Storage Module)

Notes: For more details on HPE Smart Array Controller solutions please see their [QuickSpecs](#)

Maximum Internal Storage		
Drive	Capacity	Configuration
Hot Plug SFF SAS SSD	30.6 TB	2 x 15.3 TB (with standard front SFF drive cage)
Hot Plug SFF SATA SSD	15.36 TB	2 x 7.68 TB (with standard front SFF drive cage)
Hot Plug SFF NVMe SSD	61.44TB	4 x 15.36TB (with Premium front SFF drive cage)

Interfaces

- One (1) internal USB 3.0 connector for USB flash media drive keys
Notes: The above options are intended for integrated hypervisor virtualization environments.
- One (1) internal microSD connection for boot.
- External USB 3.0 Port for updates to Server Code.
- One (1) external USB 3.0 connector for USB flash media drive keys
- One external iLO Service Port

Frames

HPE Synergy 12000 Frame, is the base for all Synergy products and supports:

- Up to 12 half-height, 6 full-height single-wide, or 3 full-height double-wide Compute Modules (mixing allowed)
- Up to 5 half-height double-wide HPE Synergy D3940 Storage Modules (mixing with compute modules in any to any ratio allowed)
- One HPE Synergy 12000 Frame will support up to twelve (12) HPE Synergy 480 Gen10 Plus Compute Modules

Industry Standard Compliance

- Microsoft® Logo certifications
- WOL enabled on some adaptors
- PXE support enabled
- USB 3.0 Compliant; iLO USB 2.0 Compliant
- TPM 2.0 Support(RBSU support for TPM 1.2)
- IEEE (specific IEEE standards depending on Ethernet adapter card(s) installed)
- Advanced Encryption Standard (AES)
- Triple Data Encryption Standard (3DES)

Standard Features

- SNMP v3
- SSL 2.0
- DMTF Systems Management Architecture for Server Hardware Command Line Protocol (SMASH CLP)

- Active Directory v1.0
- PCIe 3.0 Compliant
- UEFI (Unified Extensible Firmware Interface Forum)
- Redfish API (iLO5)
- Energy Star Compliant
- Top Runner - Japan Compliant
- ErP Lot9 Compliant (see Technical Specifications see [HPE Environmental Declarations website](#) for HPE Lot9 Declarations, a White Paper, FAQs and products list of verified products.

Notes: See requirements at end of this document or in OCA for valid configurations to meet ErP Lot9 requirements.

Graphics (iLO)

Integrated Matrox G200eH2 video standard with 16 MB of Video RAM

- 1280 x 1024 (32 bpp)
- 1920 x 1200 (16 bpp)

HPE iLO 5 on system management memory

- 32 MB Flash
 - 512 MB with ECC (224 MB after ECC and video)
-

HPE Server UEFI/Legacy ROM

Unified Extensible Firmware Interface (UEFI) is an industry standard that provides better manageability and more secured configuration than the legacy ROM while interacting with your server at boot time. HPE ProLiant Gen10 servers have a UEFI Class 2 implementation and support both UEFI Mode (default) and Legacy BIOS Mode.

Notes: The UEFI System Utilities tool is analogous to the HPE ROM-Based Setup Utility (RBSU) of legacy BIOS. For more information, please visit <https://support.hpe.com/hpsc/doc/public/display?docId=c04398276> http://itdoc.hitachi.co.jp/manuals/ha8000v/hard/Gen10/UEFI/881334-004_en.pdf

UEFI enables numerous new capabilities specific to HPE Synergy Compute Modules such as:

- Secure Boot and Secure Start enable for enhanced security
- Operating system specific functionality
- Support for > 2.2 TB (using GPT) boot drives
- USB 3.0 Stack
- Embedded UEFI Shell
- Mass Configuration Deployment Tool using iLO RESTful API that is Redfish API Conformant.
- PXE boot support for IPv6 networks
- Workload Profiles for simple performance optimization

UEFI Boot Mode only:

- TPM 2.0 Support
- NVMe Boot Support
- Platform Trust Technology (PTT) can be enabled.
- iSCSI Software Initiator Support.
- HTTP/HTTPs Boot support as a PXE alternative.
- Boot support for option cards that only support a UEFI option ROM

Notes:

Standard Features

- For UEFI Boot Mode, boot environment and OS image installations should be configured properly to support UEFI.
 - UEFI FIO Setting (758959-B22) can be selected to configure the system in Legacy mode in the factory for your HPE Synergy Gen10 Plus Server.
-

Embedded Management

HPE Synergy Composer powered by HPE OneView

HPE Synergy integrates HPE OneView to deliver 'Composable infrastructure' with a view of resources. This flexible and scalable solution provides IT managers with the architecture to implement their Software-Defined data center (SDDC) -- and to address the changing business needs and the challenges of today's enterprise data centers.

HPE Integrated Lights-Out (HPE iLO)

Silicon Root of Trust. Protect, detect, recover with iLO. Monitor your servers for ongoing management, service alerting, reporting and remote management with HPE iLO. Learn more at <http://www.hpe.com/info/ilo>.

UEFI

Configure and boot your servers securely with industry standard Unified Extensible Firmware Interface (UEFI). Learn more at [UEFI System Utilities \(hpe.com\)](http://www.hpe.com/info/uefi)

iLO RESTful API

iLO RESTful API is Redfish API conformance and offers simplified server management automation such as configuration and maintenance tasks based on modern industry standards. Learn more at <http://www.hpe.com/info/restfulapi>.

Security

Newest forms of security based on iLO 5 features.

- Secure Start, with hardware root of trust.
- HPE hardware designed logic in iLO chip validates iLO firmware burned in chip.
- iLO then validates system/compute ROM firmware for digital signature.
- iLO completes the chain of trust.
- ROM validates option ROMs and OS Bootloader via UEFI Secure Boot.

Standard security features

- Power-on password
 - Administrator's password
 - Keyboard password (QuickLock)
 - HPE iLO Management On System Management Chipset with SSL encryption, Secure Shell version 2, Advanced Encryption Standard (AES) and Triple Data Encryption Standard (3DES) on browser, CLP and XML scripting interface, AES and RC4 encryption of video
 - External USB port enable/disable
 - Network server mode
 - Serial interface control
 - TPM (Trusted Platform Module) 1.2 or 2.0 option
 - Advanced Encryption Standard (AES)
 - Intel® Advanced Encryption Standard-New Instructions (AES-NI)
-

Standard Features

About Trusted Platform Module

Trusted Platform Module (TPM) is a separate processor that monitors the system state. TPM is a passive component needing to be updated and not able to lock down any component in the system except access to its own memory. It also provides some cryptographic operations - among them: creating RSA keypairs, and working with them.

The first verification of signatures happens by code on the CPU, which can be intercepted and replaced. Emulating a "properly" booted system is possible by sending the right values to the TPM.

The bootblock, the part of the firmware that contains the first instructions executed by the CPU, comes first and anchors the root of trust. But if you can't trust the bootblock to send a truthful state into the TPM, this is a vulnerability.

About HPE Silicon Root of Trust

As soon as the server is powered on and the iLO firmware comes alive, it looks into the silicon for the immutable fingerprint that verifies all the firmware code is valid and uncompromised. Over a million lines of firmware code run before the operating system starts, making it vital to confirm that all server essential firmware is free from malware or compromised code.

During operation of the server, HPE has a new technology that conducts run-time firmware validation that checks the firmware stored in the server. At any point, if compromised code or malware is inserted in any of the critical firmware, an iLO audit log alert is created to notify the customer that a compromised has occurred. It is achieved by storing iLO 5 and UEFI firmware in non-volatile Flash memory which is thoroughly scanned at regular user determined intervals. The contents of the firmware stored in memory must be exactly right, down to the individual bit, or else it is flagged as compromised. See the iLO 5 QuickSpecs for recovery processes.

Warranty

This product is covered by a global limited warranty and supported by HPE Services and a worldwide network of HPE Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HPE Pointnext operational services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

Notes: Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have Hewlett Packard Enterprise replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at: <http://www.hpe.com/services/support>.

Optional Features

Server Management

HPE OneView Advanced

HPE OneView brings a new level of automation to infrastructure management by taking a template driven approach to provisioning, updating, and integrating compute, storage, and networking infrastructure. It provides full-featured licenses which can be purchased for managing Gen9, Gen10 and Gen10 Plus servers.

HPE iLO Advanced (standard with Synergy Compute)

HPE iLO Advanced licenses offer smart remote functionality without compromise. The license includes the full integrated remote console, virtual keyboard, video, and mouse (KVM), multi-user collaboration, console record and replay, and GUI-based and scripted virtual media and virtual folders. You can also activate the enhanced security and power management functionality

HPE iLO Advanced Premium (optional)

Security Edition for iLO 5 includes iLO Advanced License plus high-end security modes, unique security capabilities, like Automatic FW recovery; Runtime FW verification, and Secure erase.

HPE Synergy 480 Gen10 Plus Graphics Accelerator Options Overview

HPE Synergy graphics accelerator options are paired with the HPE Synergy 480 Gen10 Plus Compute Module to provide a wide variety of deployment options, operating environments, and remote access methods. The HPE Synergy 480 Gen10 Plus graphics accelerator options deliver data center deployments of GPU-enabled servers optimized for high-density graphics accelerated VDI (virtual Workstation), virtual applications, and compute deployments such as deep learning, inferencing, and HPC workloads.

HPE Synergy 480 Gen10 Plus Graphics Options Detail

HPE Synergy 480 Gen10 Plus graphics accelerators are offered and supported in four different configurations:


- HPE Synergy 480 Gen10 Plus Front PCIe GPU Enablement Kit
 - Front Cage Single PCIe SLot
 - Supports PCIe Gen3 x8 small form factor cards
 - Low Profile small form factor cards
 - HPE available/supported cards include:
 - NVIDIA T4
- HPE Synergy 480 Gen10 Plus 8-Slot PCIe Expansion Module
 - Double wide configuration with Compute Module (occupies two Synergy frame slots)
 - Supports up to eight PCIe Gen3 x8.
 - HPE available/supported cards include:
 - NVIDIA T4
- HPE Synergy 480 Gen10 Plus 2-Slot PCIe Expansion Module
 - Double wide configuration with Compute Module (occupies two Synergy frame slots)
 - Supports up to two PCIe Gen4 x16 double-wide full-length cards
 - HPE available/supported cards include:

Optional Features

- o NVIDIA A40
- HPE Synergy 480 Gen10 Plus 4-Slot PCIe Expansion Module
 - Double wide configuration with Compute Module (occupies two Synergy frame slots)
 - Supports up to four PCIe Gen4 x8 single-wide full-length cards
 - HPE available/supported cards include:
 - o NVIDIA A10
 - o NVIDIA A40



HPE Synergy 480 Compute GPU Expansion Options

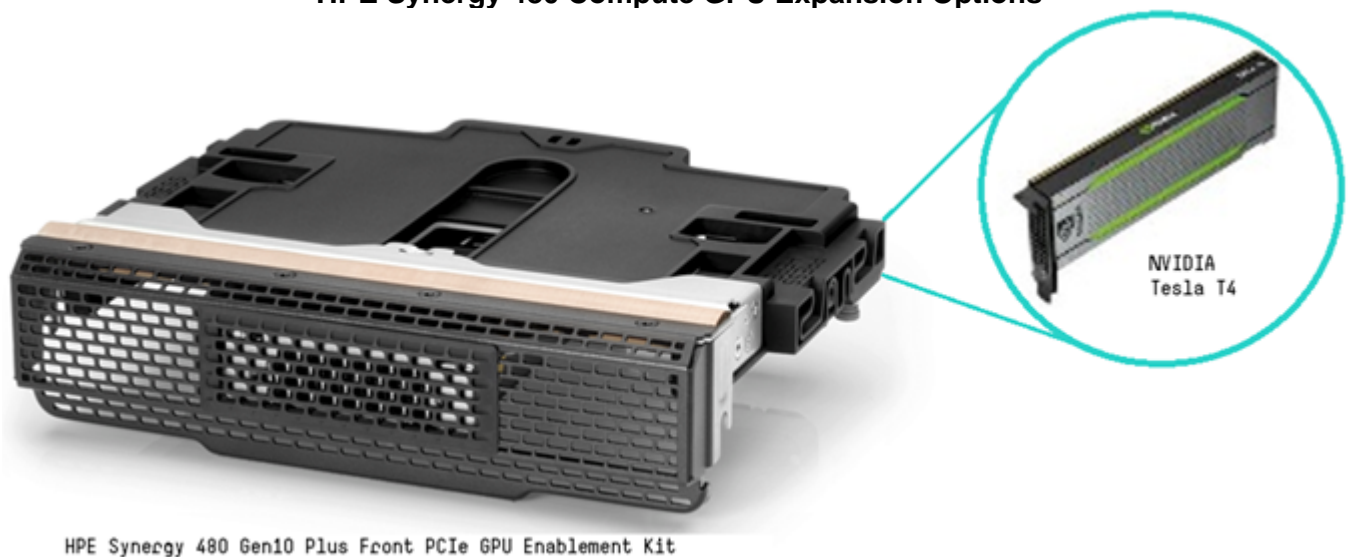

HPE Synergy 480 Front PCIe Accelerator Enablement Kit

GPU Enablement Modules	GPU's Available	Size
HPE Synergy 480 Gen10 Plus 2-Slot PCIe Module	Nvidia A40	2x Full Size, Double Wide PCIe GPU Slot

Optional Features

HPE Synergy 480 Gen10 Plus 4-Slot PCIe Module	Nvidia A10	4x Full Size, Single Wide PCIe GPU Slot
HPE Synergy 480 Gen10 Plus 8-Slot PCIe Module	Nvidia Tesla T4	4x Full Size, Single Wide PCIe GPU Slot
HPE Synergy 480 Gen10 Plus Front PCIe GPU Kit	Nvidia Tesla T4	1x SFF, Half Size, Single Wide PCIe GPU Slot

Fibre Channel Support

Up to two (2) optional Fibre Channel mezzanine HBAs are supported on the HPE Synergy 480 Gen10.

- HPE Synergy 5330C 32G Fibre Channel Host Bus Adapters
- HPE Synergy 5830C 32G Fibre Channel Host Bus Adapters

Compatible SAN

HPE Synergy 480 Gen10 Plus Compute Modules are optimized for HPE MSA, Nimble, Primera, and Alletra.

HPE Virtual Connect

HPE Synergy composable fabric delivers high performance and composability for the delivery of applications and services. The composable fabric is based on primary/satellite architecture.

The HPE Virtual Connect SE 100Gb F32 Module or Virtual Connect SE 40Gb F8 Module, primary modules, based on composable fabric is designed for Composable Infrastructure. Its disaggregated, rack-scale design uses a primary/satellite architecture to consolidate data center network connections, reduce hardware and scales network bandwidth across multiple HPE Synergy Frames.

The primary module contains intelligent networking capabilities that extend connectivity to satellite frames through Interconnect Link Modules. This eliminates top of rack switch need and substantially reduces cost. The reduction in components also simplifies fabric management at scale while consuming fewer ports at the data center aggregation layer.

The HPE VC SE 100Gb F32 Module or HPE VC SE 40 Gb F8 module eliminate up to 95% of network sprawl at the compute module edge with one device that converges traffic inside frames and directly connects to external LANs. Each redundant pair of Virtual Connect modules provide eight adjustable downlink connections (six Ethernet and two Fibre Channel, or eight Ethernet) to dual-port 10 Gb and in case of 20 Gb Converged Network Adapters 16 adjustable downlinks connections 14 Ethernet and two Fibre Channel) on each compute module. Up to six uplinks using QSFP+ interfaces are available for connection to upstream Ethernet switches. Including splitter cables up to 24 uplinks are available for connection to upstream Ethernet and Fibre Channel. The HPE VC SE 100 Gb F32 or VC SE 40 Gb F8 module avoid the confusion of traditional and other converged network solutions by eliminating the need for multiple Ethernet and Fibre Channel switches, extension modules, cables and software licenses. Also, Virtual Connect wire-once connection management is built-in enabling compute modules adds, moves and replacement in minutes instead of days or weeks. The Primary/Satellite disaggregated architecture removes fixed of ratios of interconnects in every frame and allows extending networking resources pool for Virtual Connect to satellite frames.

For more information on Virtual Connect and converged network options, see [VC SE 40Gb F8 Module](#) or [HPE Virtual Connect SE 100Gb F32 Module for Synergy](#) for more details.

Optional Features

One Config Simple (SCE)

SCE is a guided self-service tool to help sales and non-technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE.

Service and Support

HPE Pointnext - Service and Support

Get the most from your HPE Products. Get the expertise you need at every step of your IT journey with **HPE Pointnext Services**. We help you lower your risks and overall costs using automation and methodologies that have been tested and refined by HPE experts through thousands of deployments globally. HPE Pointnext **Advisory Services**, focus on your business outcomes and goals, partnering with you to design your transformation and build a roadmap tuned to your unique challenges. Our **Professional** and **Operational Services** can be leveraged to speed up time-to-production, boost performance and accelerate your business. HPE Pointnext specializes in flawless and on-time implementation, on-budget execution, and creative configurations that get the most out of software and hardware alike.

Consume IT on your terms

HPE GreenLake brings the cloud experience directly to your apps and data wherever they are—the edge, colocations, or your data center. It delivers cloud services for on-premises IT infrastructure specifically tailored to your most demanding workloads. With a pay-per-use, scalable, point-and-click self-service experience that is managed for you, HPE GreenLake accelerates digital transformation in a distributed, edge-to-cloud world..

- Get faster time to market
- Save on TCO, align costs to business
- Scale quickly, meet unpredictable demand
- Simplify IT operations across your data centers and clouds

Managed services to run your IT operations

HPE GreenLake Management Services provides services that monitor, operate, and optimize your infrastructure and applications, delivered consistently and globally to give you unified control and let you focus on innovation.

Free up resources with Operational Services from HPE Pointnext Services

HPE delivers services for IT by using proven best practices as well as automation and methodologies that have been tested and refined by HPE experts and artificial intelligence through thousands of deployments globally. Choose from the recommended services for customers purchasing from Hewlett Packard Enterprise or an authorized reseller. Services are quoted using Hewlett Packard Enterprise order configuration tools.

HPE Pointnext Tech Care

HPE Pointnext Tech Care is the new operational service experience for HPE products. Tech Care goes beyond traditional support by providing access to product specific experts, an AI driven digital experience, and general technical guidance to not only reduce risk but constantly search for ways to do things better. HPE Pointnext Tech Care has been reimagined from the ground up to support a customer-centric, AI driven, and digitally enabled customer experience to move your business forward. HPE Pointnext Tech Care is available in three response levels. Basic, which provides 9x5 business hour availability and a 2 hour response time. Essential which provides a 15 minute response time 24x7 for most enterprise level customers, and Critical which includes a 6 hour repair commitment where available and outage management response for severity 1 incidents.

<https://www.hpe.com/services/techcare>

HPE Pointnext Complete Care

HPE Pointnext Complete Care is a modular, edge-to-cloud IT environment service that provides a holistic approach to optimizing your entire IT environment and achieving agreed upon IT outcomes and business goals through a personalized and customer-centric experience. All delivered by an assigned team of HPE Pointnext Services experts. HPE Pointnext Complete Care provides:

- A complete coverage approach -- edge to cloud
- An assigned HPE team

Service and Support

- Modular and fully personalized engagement
- Enhanced Incident Management experience with priority access
- Digitally enabled and AI driven customer experience

<https://www.hpe.com/services/complecare>

HPE Education Services

Keep your IT staff trained making sure they have the right skills to deliver on your business outcomes. Book on a class today and learn how to get the most from your technology investment. [HPE Support](#)

HPE Support Center

The HPE Support Center is a personalized online support portal with access to information, tools and experts to support HPE business products. Submit support cases online, chat with HPE experts, access support resources or collaborate with peers. Learn more <http://www.hpe.com/support/hpesc>

HPE's Support Center Mobile App* allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalized IT support anywhere, anytime.

HPE Insight Remote Support and HPE Support Center are available at no additional cost with a HPE warranty, HPE Support Service or HPE contractual support agreement.

Notes: *HPE Support Center Mobile App is subject to local availability. For more information: <http://www.hpe.com/services>

Parts and Materials

Hewlett Packard Enterprise will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product QuickSpecs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by Hewlett Packard Enterprise due to malfunction.

For more information

- www.hpe.com/services
- <https://www.hpe.com/us/en/services/operational.html>

To learn more on HPE Storage Services, please contact your Hewlett Packard Enterprise sales representative or Hewlett Packard Enterprise Authorized Channel Partner. Contact information for a representative in your area can be found at "Contact HPE" <https://www.hpe.com/us/en/contact-hpe.html>

HPE Support Services are sold by HPE and Hewlett Packard Enterprise Authorized Service Partners:

- Services for customers purchasing from HPE or an enterprise reseller are quoted using HPE order configuration tools.
 - Customers purchasing from a commercial reseller can find HPE Support Services at <https://ssc.hpe.com/portal/site/ssc/>
-

Configuration Information

Factory Integrated Models (CTO - Configure-To-Order Process)

This section lists some of the steps required to configure a Factory Integrated Model (configure-to-order or CTO compute module). To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an Hewlett Packard Enterprise approved configurator. Contact your local sales representative for information on CTO product offerings and requirements.

Notes:

- Not all models are available in all regions. Check with your local country Hewlett Packard Enterprise offices for availability.
- Configure-to-order compute modules must start with a CTO Compute Module.
- FIO indicates that this option is only available as a factory installable option.
- All Factory Integrated Models will be populated with sufficient drive blanks based on the number of initial drives ordered with the server.
- The Factory integrated w/o drive bay model ships with a grill blank in place of the drive cage and drive backplane.

CTO Compute Module	HPE Synergy 480 Gen10 Plus CTO Compute Module
SKU Number	P22139-B21
TAA SKU ¹	P22139-B22
Processor	Up to 2 Selectable Intel Xeon Scalable Family Processors Generation 3 below
DIMM Slots	Up to 32 DIMM slots(16 per processor-) selectable below
Storage	Optional, not included in above SKUs: selectable 2 Drive, 4 Drive Direct Connect or no Drive cage options below.
Storage Controllers	Optional, not included in above SKUs: HPE NS204i-d SY Gen10+ Boot Controller(with 2x M.2 480GB M.2 Drives included) Front Drive Cage Controller Options: Software RAID - S100i Chipset SATA, Essential RAID - E208i-c, Performance RAID-P204i-c, Direct Connect for 4 Drive NVMe option and MicroChip Smart RAID P416ie-m SATA/SAS Mezzanine option for split 4 Drive option(2x NVMe and 2x SAS/SATA) and D3940 Storage Module (cables selectable)
Drives supported	Optional, not included in above SKUs:: SAS/SATA/NVMe/M.2/ uFF
IO Expansion/ Mezzanine slots	3x 16 PCIe 3.0 Slots for Mezzanine Options
Network	Optional, not included in above SKUs:: (HPE Synergy HPE Synergy 4820c 10/20/25 CNA, HPE Synergy 5330C 32G Fibre Channel Host Bus Adapters, HPE Synergy 5830C 32G Fibre Channel Host Bus Adapters
Graphic Processing Units	Optional Mezzanine and PCI Module solutions
Security	iLO 5
USB and MicroSD	1 Internal USB 3.0, 1 Internal microSD
Management	OneView 3.1 and iLO 5 Advanced (standard)

Notes:

- CTO SKUs are designed for specific use case fits.
- This information applies to factory CTO configurations, Field upgrades may differ depending field configurations.
- Backplane in the chassis description refers to the type of controller backplane in the Drive Cage modules.
- 2Drive Standard Backplane CTO Chassis is designed for flexible use of the Compute Module for most workloads. This SKU may use the SATA Board Option, or Smart Array options. This SKU may also use the Mezzanine MicroChip Smart RAID P416ie-m for connection to the HPE D3940 Storage Module. Links to local front drive only come with the 4x Drive

Configuration Information

Cage Module.

- The Drive-Less CTO option is intended for stateless on SAN/NAS boot use cases and will supports the MicroChip Smart RAID P416ie-m x16 Lanes 2GB Cache SAS 12G Controller for HPE mezzanine Smart Array for Synergy D3940 Storage Modules. Additional, this model supports adding the HPE NS204i-d SY Gen10+ Boot Controller for dual M.2 drive HW RAID options. This SKU may also use the Mezzanine MicroChip Smart RAID P416ie-m for connection to the HPE D3940 Storage Module (no connection to the M.2 Module).
- The 4 Drive Premium Backplane CTO option supports 4 NVMe drives Direct Connect to the Front Drive cage. This option may be converted to a 2x2 drive option with 2x SATA/SAS drives may be optionally supported in the Front Drive Cage through SAS Cable connection to new MicroChip Smart RAID P416ie-m x16 Lanes 2GB Cache SAS 12G Controller for HPE which may also connect with the D3940 Storage Module.
- Optional NS204i-d Gen10+ Boot Controller is a Direct Connect to PCIe from the processor and contains 2 M.2 480GB capacity drive included for Hardware RAID Boots. This option resides below the front drive cages and allows for dual configurations with most drive cage options.
- ¹HPE offers multiple Trade Agreement Act (TAA) compliant configurations to meet the needs of US Federal Government customers. These products are either manufactured or substantially transformed in a designated country.

Step 1: Base Configuration

HPE Synergy 480 Gen10 Plus CTO Compute Module	P22139-B21
HPE Synergy 480 Gen10 Plus TAA CTO Compute Module	P22139-B22

Step 2: Choose your Boot, Drive Cage and Controller Options

Option 1: Front Drive Cage	
HPE SY480 Gen10 Plus Standard 2Drive Kit.	P36675-B21
Optional Controllers for above Drive Cage:	
HPE Synergy Gen10 SATA FIO Board Kit (not supported with HPE NS204i-d M.2 Boot Controller)	872955-B21
HPE Smart Array E208i-c SR Gen10 (8 Internal Lanes/No Cache) 12G SAS Modular Controller	823852-B21
HPE Smart Array P204i-c SR Gen10 (4 Internal Lanes/1GB Cache) 12G SAS Modular Controller	804424-B21
Option 2: Front Drive Cage	
HPE SY480 Gen10 Plus Premium 4 Drive Kit.	P36677-B21
Options comes stand include a cable for a 4 Drive NVMe Direct Connect solution or a 2x NVMe and 2x SAS/SATA solution	
HPE SY480 Gen10+ 4SFF Direct Cable Option Kit	P29009-B21
Notes: (Required for a 4 NVMe SFF Direct Connect solution - 2x cable & 2x backplane)	
HPE SY480 Gen10+ SlimSAS Cable Option Kit	P29010-B21
Notes: (Required for 2x SAS/SATA Drives with 2x NVMe Direct Backplane connection)	
SlimSAS Cable requires:	
Microchip SmartRAID P416ie-m x16 Lanes 2GB Cache SAS 12G Controller for HPE	P38721-B21
Notes: (Also works with D3940 Storage Drive if installed in Frame)	
HPE Synergy 480 Gen10 Plus without Drive Front Cage Kit	P36676-B21
Notes: (Drive less)	

Configuration Information

HPE NS204i-d Gen10+ Boot Controller

P21410-B21

Notes:

- (M.2 HW RAID Controller)
- Installs below any Drive Cage option and can be used with any of the Drive Cage options above.
- Cannot be used with HPE Synergy Gen10 SATA FIO Board Kit, 872955-B21.

Step 3: Choose Required Options

Please select up to two matching processors.

Notes:

- Mixing of 2 different processor models is not supported.
- CTO server includes appropriate heatsinks with your selection of 1 or 2 processors.
- For Single processors DIMM blanks kit (P07818-B21) recommended with processors to enhance cooling.

Processor Option Kits

3rd Generation Intel® Xeon®-Platinum

Notes:

- All SKUs below ship with appropriate heatsinks.
- 3200 MT/S maximum memory speed unless otherwise noted.
- 64GB SGX Enclave unless otherwise noted.

Intel Xeon-Platinum 8380 2.3GHz 40-core 270W Processor for HPE P36941-B21

Intel Xeon-Platinum 8368 2.4GHz 38-core 270W Processor for HPE P36940-B21

Notes: 512GB SGX Enclave.

Intel Xeon-Platinum 8360Y 2.4GHz 36-core 250W Processor for HPE P36939-B21

Notes: 36/32/24 cores would result in 2.4/2.5/2.6 GHz operating points at 250W/250W/220W TDPs

Intel Xeon-Platinum 8358P 2.6GHz 32-core 240W Processor for HPE P37598-B21

Notes: 8GB SGX Enclave.

Intel Xeon-Platinum 8358 2.6GHz 32-core 250W Processor for HPE P36938-B21

Intel Xeon-Platinum 8352Y 2.2GHz 32-core 205W Processor for HPE P36929-B21

Notes: 32/24/16 cores would result in 2.2/2.3/2.6 GHz operating points at 205W/185W/185W TDPs.

Intel Xeon-Platinum 8352V 2.1GHz 36-core 195W Processor for HPE P37599-B21

Notes:

- Supports Intel® Speed Select Performance Profile (SST-P), even though not being a "Y" processor.
- 36/32/24 cores would result in 2.1/2.0/2.0 GHz operating points at 195W/180W/155W TDPs.
- 3200 MT/s max. memory speed.
- 8GB SGX Enclave.

Intel Xeon-Platinum 8352S 2.2GHz 32-core 205W Processor for HPE P37613-B21

Notes:

Configuration Information

- Supports Intel® Speed Select Performance Profile (SST-P), even though not being a "Y" processor.
- 32/24/16 cores would result in 2.2/2.3/2.6 GHz operating points 205W/185W/185W TDPs.
- 512GB SGX Enclave.

3rd Generation Intel® Xeon®-Gold

Notes:

- All SKUs below ship with appropriate heatsinks.
- 3200 MT/s maximum memory speed unless otherwise noted.
- 64GB SGX Enclave unless otherwise noted.

Intel Xeon-Gold 6354 3.0GHz 18-core 205W Processor for HPE	P36935-B21
Intel Xeon-Gold 6348 2.6GHz 28-core 235W Processor for HPE	P36937-B21
Intel Xeon-Gold 6346 3.1GHz 16-core 205W Processor for HPE	P36934-B21
Intel Xeon-Gold 6342 2.8GHz 24-core 230W Processor for HPE	P36936-B21
Intel Xeon-Gold 6338N 2.2GHz 32-core 185W Processor for HPE	P37603-B21

Notes: 2677 MT/s max. memory speed.

Intel Xeon-Gold 6338 2.0GHz 32-core 205W Processor for HPE	P36928-B21
Intel Xeon-Gold 6336Y 2.4GHz 24-core 185W Processor for HPE	P36926-B21

Notes: 24/12/8 cores would result in 2.4/2.9/3.1 GHz operating points at 185W/150W/150W TDPs.

Intel Xeon-Gold 6334 3.6GHz 8-core 165W Processor for HPE	P36933-B21
Intel Xeon-Gold 6330N 2.2GHz 28-core 165W Processor for HPE	P37604-B21

Notes: 2667 MT/s max. memory speed.

Intel Xeon-Gold 6330 2.0GHz 28-core 205W Processor for HPE	P36927-B21
--	------------

Notes: 2933 MT/s max. memory speed.

Intel Xeon-Gold 6326 2.9GHz 16-core 185W Processor for HPE	P36932-B21
Intel Xeon-Gold 5320 2.2GHz 26-core 185W Processor for HPE	P36925-B21

Notes: 2933 MT/s max. memory speed.

Intel Xeon-Gold 5318Y 2.1GHz 24-core 165W Processor for HPE	P36924-B21
---	------------

Notes:

- 24/24/22 cores would result in 2.1/1.9/2.0 GHz operating points at 165W/150W/150W TDPs.

- 2933 MT/s max. memory speed.

Intel Xeon-Gold 5318S 2.1GHz 24-core 165W Processor for HPE	P37612-B21
---	------------

Notes:

- Supports Intel® Speed Select Performance Profile (SST-P), even though not being a "Y" processor.

- 24/20 cores would result in 2.1/2.0 GHz operating points at 150W/135W TDPs.

- 2933 MT/s max. memory speed.

Intel Xeon-Gold 5318N 2.1GHz 24-core 150W Processor for HPE	P37605-B21
---	------------

Notes:

- Supports Intel® Speed Select Performance Profile (SST-P), even though not being a "Y" processor.

- 24/24/22 cores would result in 2.1/1.9/2.0 GHz operating points at 165W/150W/150W TDPs.

Configuration Information

– 2667 MT/s max. memory speed.

Intel Xeon-Gold 5317 3.0GHz 12-core 150W Processor for HPE

P36931-B21

Notes: 2933 MT/s max. memory speed.

Intel Xeon-Gold 5315Y 3.2GHz 8-core 140W Processor for HPE

P36930-B21

Notes:

– 8/6/4 cores would result in 3.2/3.2/3.4 GHz operating points at 140W/125W/115W TDPs.

– 2933 MT/s max. memory speed.

3rd Generation Intel Xeon-Silver

Notes:

– All SKUs below ship with processor and appropriate heatsinks.

– 2666 MT/S maximum memory speed.

– 8GB SGX Enclave unless otherwise noted.

Intel Xeon-Silver 4316 2.3GHz 20-core 150W Processor for HPE

P36923-B21

Intel Xeon-Silver 4314 2.4GHz 16-core 135W Processor for HPE

P36922-B21

Notes: Intel Optane 200 Series persistent memory not supported with 43xx Series except 4314 processor.

Intel Xeon-Silver 4310 2.1GHz 12-core 120W Processor for HPE

P36921-B21

Intel Xeon-Silver 4309Y 2.8GHz 8-core 105W Processor for HPE

P36920-B21

Notes: 8/8/8 cores would result in 2.8/2.6/2.3 GHz operating points at 105W/95W/85W TDPs.

Step 4: Choose Memory Options

Please select one or more memory DIMMs from below.

For new Gen10 Plus memory population rule whitepaper and optimal memory performance guidelines, please go to:

<http://www.hpe.com/docs/memory-population-rules>

For Gen10 Plus memory speed table, please go to: <https://www.hpe.com/docs/memory-speed-table>

For memory Reliability, Accessibility, Serviceability (RAS) features whitepaper like Gen10 Plus Fast Fault Tolerance and legacy mirrored memory feature etc. please go to: <http://www.hpe.com/docs/memory-ras-feature>.

Notes:

– The maximum memory speed and capacity is a function of the memory type, memory configuration, and processor model.

– Quantity of memory DIMMs selected per socket must be 1, 2, 4, 6, 8, 12 or 16.

– For additional information, please see the [HPE DDR4 Smart Memory QuickSpecs](#)

Registered DIMMs (RDIMMs)

Configuration Information

HPE 8GB (1x8GB) Single Rank x8 DDR4-3200 CAS-22-22-22 Registered Smart Memory Kit	P07525-B21
HPE 16GB (1x16GB) Dual Rank x8 DDR4-3200 CAS-22-22-22 Registered Smart Memory Kit	P06031-B21
HPE 16GB (1x16GB) Single Rank x4 DDR4-3200 CAS-22-22-22 Registered Smart Memory Kit	P06029-B21
HPE 32GB (1x32GB) Dual Rank x4 DDR4-3200 CAS-22-22-22 Registered Smart Memory Kit	P06033-B21
HPE 32GB (1x32GB) Single Rank x4 DDR4-3200 CAS-22-22-22 Registered Smart Memory Kit	P40007-B21
HPE 64GB (1x64GB) Dual Rank x4 DDR4-3200 CAS-22-22-22 Registered Smart Memory Kit	P06035-B21

Load Reduced DIMMs (LRDIMMs)

Notes: Mixing of 3DS and non-3DS DIMMs not allowed.

HPE 128GB (1x128GB) Quad Rank x4 DDR4-3200 CAS-22-22-22 Load Reduced Smart Memory Kit	P06037-B21
HPE Synergy 256GB (1x256GB) Octal Rank x4 DDR4-3200 CAS-26-22-22 Load Reduced 3DS Smart Memory Kit	P45867-B21
HPE DDR4 DIMM Blank Kit	P07818-B21

Notes:

- Important: Empty memory slots require DIMM Slot Blanks for improved thermal control. (HPE DDR-4 DIMM Blanks Kit, P07818-B21)
- HPE memory from previous generation servers (DDR3) is not compatible with this compute module. HPE Smart Memory is required to realize the memory performance improvements and enhanced functionality listed in this document for SY480 Gen10 Plus. For additional information, please see the [HPE Smart Memory QuickSpecs](#).
- LRDIMM and RDIMM are distinct memory technologies and cannot be mixed within a compute module.
- For the latest information on [Memory Speed](#).
- If you want to know more about the memory, reference the [RAS feature whitepaper](#).
- See [Server Memory and Persistent Memory Population Rules](#) for details.

[Server Memory and Persistent Memory Population Rules for HPE Gen10 Plus servers with 3rd Gen Intel Xeon Scalable Processors technical white paper](#)

Intel Optane 200 Series - HPE Persistent Memory dimm options (*availability in September*)

Intel Optane 128GB persistent memory 200 Series for HPE	P23532-B21
Intel Optane 256GB persistent memory 200 Series for HPE	P23535-B21
Intel Optane 512GB persistent memory 200 Series for HPE	P23538-B21

For additional information regarding HPE Persistent Memory Population Rules and Guidelines for Gen10 Plus visit: <http://www.hpe.com/docs/memory-population-rules>

Step 5: Choose Networking Adapters

Notes: Only one or more of the following from each list unless otherwise noted

HPE Synergy 4820C 10/20/25Gb Converged Network Adapter	876449-B21
HPE Synergy 6820C 25/50Gb Converged Network Adapter	P02054-B21

Configuration Information

Notes: Networking adapters must have matched Interconnect Modules or Interconnect Links matched in the corresponding ICM slot on the rear of the Synergy 12000 Frame. See Specifications Section below for Mezzanine to ICM Best Practices and matching requirements.

Step 6: Additional Factory Integratable Options

HPE Storage Controllers

HPE FIO Enable Smart Array SW RAID 784308-B21

HPE Synergy Compute Chipset SATA FIO Board Kit 872955-B21

Notes: HPE Synergy Compute Chipset SATA FIO Board Kit cannot be used with HPE NS204i-d Gen10 Plus Boot Controller.

HPE NS204i-d Gen10 Plus NVMe PCIe3 x4 M.2 OS Boot Device P21410-B21

Notes: HPE NS204i-d Gen10 Plus Boot Controller cannot be used with HPE Synergy Compute Chipset SATA FIO Board Kit

HPE Smart Array E208i-c SR Gen10 (8 Internal Lanes/No Cache) 12G SAS Modular Controller 823852-B21

HPE Smart Array P204i-c SR Gen10 (4 Internal Lanes/1GB Cache) 12G SAS Modular Controller 804424-B21

HPE 96W Smart Storage Lithium-ion Battery with 260mm Cable Kit P01367-B21

HPE Smart Storage Hybrid Capacitor with 260mm Cable Kit P02381-B21

Microchip SmartRAID P416ie-m x16 Lanes 2GB Cache SAS 12G Controller for HPE P38721-B21

Notes: New MicroChip Smart RAID P416ie-m manages the drives in the HPE D3940 Synergy Storage Module(40 Frame shared drives) amd is for SATA/SAS drive use with Front 4 Drive Premium Cage module (2x local drives). For more information on the 4 Drive Premium Cage with SAS Cable defined, see the Drive Cage sections of documents above.

HPE I/O Expansion Options

HPE Synergy 6820C 25/50Gb Converged Network Adapter P02054-B21

HPE Synergy 4820C 10/20/25Gb Converged Network Adapter 876449-B21

HPE Synergy 5330C 32Gb Fibre Channel Host Bus Adapter 870828-B21

HPE Synergy 5830C 32Gb Fibre Channel Host Bus Adapter 777456-B21

Notes: See Specifications sections below for Best Practices and requirements for options placement in correct mezzanine slots that match with Interconnect model slotting for correct operations.

Step 7: Choose additional options for Factory Integration from Additional Options sections below or the following:

- HPE Synergy 12000 Frame QuickSpecs
<https://www.hpe.com/h20195/v2/GetHtml.aspx?docname=c04815113>
- HPE Synergy Interconnect and Mezzanine Components QuickSpecs
<https://www.hpe.com/h20195/v2/GetHtml.aspx?docname=c04815110>
<https://www.hpe.com/h20195/v2/GetHtml.aspx?docname=c04815110>
- HPE Synergy D3940 Storage Module QuickSpecs
<https://www.hpe.com/h20195/v2/GetHtml.aspx?docname=c04815141>

Step 8: Choose from Pointnext Services for HPE Synergy

HPE Synergy Operational Services

HPE 5Y Tech Care Essential Service HU4A6A5

HPE 5Y Tech Care Critical Service HU4A3A5

Configuration Information

HPE 5Y Complete Care Addon Essential Service	HU4D5A5
HPE 5Y Complete Care Addon Critical Service	HU4D2A5

Additional Options

Additional Options Available

Notes: wDMR, Defective Media Retention; cDMR, Comprehensive Defective Media Retention

HPE 3Y Tech Care Basic Service	HU4B2A3
HPE 3Y Tech Care Basic with Defective Media Retention Service	HU4B3A3
HPE 3Y Tech Care Basic with Comprehensive Defective Material Retention Service	HU4B4A3
HPE 3Y Complete Care Addon Basic Service	HU4D8A3
HPE 3Y Complete Care Addon Basic with Defective Media Retention Service	HU4D9A3
HPE 3Y Complete Care Addon Basic with Comprehensive Defective Material Retention Service	HU4E0A3
HPE 3Y Tech Care Essential Service	HU4A6A3
HPE 3Y Tech Care Essential with Defective Media Retention Service	HU4A7A3
HPE 3Y Tech Care Essential with Comprehensive Defective Material Retention Service	HU4A8A3
HPE 3Y Complete Care Addon Essential Service	HU4D5A3
HPE 3Y Complete Care Addon Essential with Defective Media Retention Service	HU4D6A3
HPE 3Y Complete Care Addon Essential with Comprehensive Defective Material Retention Service	HU4D7A3
HPE 3Y Tech Care Critical Service	HU4A3A3
HPE 3Y Tech Care Critical with Defective Media Retention Service	HU4A4A3
HPE 3Y Tech Care Critical with Comprehensive Defective Material Retention Service	HU4A5A3
HPE 3Y Complete Care Addon Critical Service	HU4D2A3
HPE 3Y Complete Care Addon Critical with Defective Media Retention Service	HU4D3A3
HPE 3Y Complete Care Addon Critical with Comprehensive Defective Material Retention Service	HU4D4A3
HPE 4Y Tech Care Basic Service	HU4B2A4
HPE 4Y Tech Care Basic with Defective Media Retention Service	HU4B3A4
HPE 4Y Tech Care Basic with Comprehensive Defective Material Retention Service	HU4B4A4
HPE 4Y Complete Care Addon Basic Service	HU4D8A4
HPE 4Y Complete Care Addon Basic with Defective Media Retention Service	HU4D9A4
HPE 4Y Complete Care Addon Basic with Comprehensive Defective Material Retention Service	HU4E0A4
HPE 4Y Tech Care Essential Service	HU4A6A4
HPE 4Y Tech Care Essential with Defective Media Retention Service	HU4A7A4
HPE 4Y Tech Care Essential with Comprehensive Defective Material Retention Service	HU4A8A4
HPE 4Y Complete Care Addon Essential Service	HU4D5A4
HPE 4Y Complete Care Addon Essential with Defective Media Retention Service	HU4D6A4
HPE 4Y Complete Care Addon Essential with Comprehensive Defective Material Retention Service	HU4D7A4
HPE 4Y Tech Care Critical Service	HU4A3A4
HPE 4Y Tech Care Critical with Defective Media Retention Service	HU4A4A4
HPE 4Y Tech Care Critical with Comprehensive Defective Material Retention Service	HU4A5A4
HPE 4Y Complete Care Addon Critical Service	HU4D2A4
HPE 4Y Complete Care Addon Critical with Defective Media Retention Service	HU4D3A4
HPE 4Y Complete Care Addon Critical with Comprehensive Defective Material Retention Service	HU4D4A4
HPE 5Y Tech Care Basic Service	HU4B2A5
HPE 5Y Tech Care Basic with Defective Media Retention Service	HU4B3A5
HPE 5Y Tech Care Basic with Comprehensive Defective Material Retention Service	HU4B4A5

Additional Options

HPE 5Y Complete Care Addon Basic Service	HU4D8A5
HPE 5Y Complete Care Addon Basic with Defective Media Retention Service	HU4D9A5
HPE 5Y Complete Care Addon Basic with Comprehensive Defective Material Retention Service	HU4E0A5
HPE 5Y Tech Care Essential Service	HU4A6A5
HPE 5Y Tech Care Essential with Defective Media Retention Service	HU4A7A5
HPE 5Y Tech Care Essential with Comprehensive Defective Material Retention Service	HU4A8A5
HPE 5Y Complete Care Addon Essential Service	HU4D5A5
HPE 5Y Complete Care Addon Essential with Defective Media Retention Service	HU4D6A5
HPE 5Y Complete Care Addon Essential with Comprehensive Defective Material Retention Service	HU4D7A5
HPE 5Y Tech Care Critical Service	HU4A3A5
HPE 5Y Tech Care Critical with Defective Media Retention Service	HU4A4A5
HPE 5Y Tech Care Critical with Comprehensive Defective Material Retention Service	HU4A5A5
HPE 5Y Complete Care Addon Critical Service	HU4D2A5
HPE 5Y Complete Care Addon Critical with Defective Media Retention Services	HU4D3A5
HPE 5Y Complete Care Addon Critical with Comprehensive Defective Material Retention Service	HU4D4A5

HPE Drives

Notes:

- The HPE Synergy 480 Gen10 Plus Compute Module supports the HPE hot-plug small form factor (SFF) Smart Drive carrier for enhanced management and reduced maintenance errors. HPE drives from generation G7 servers and before are not compatible with the HPE Synergy 480 Gen10 drive bays.
- The mixing of standard SAS drives with SAS SSD is supported within the compute module, but limits the RAID configuration to two separate RAID 0 volumes. Mixing of other drives types is not supported.
- HPE drives have either a one year or three year warranty; refer to the specific drive QuickSpecs for details. [HPE Hard Disk Drives](#) or [HPE Solid State Drives](#)
- The drive options are not required when configuring a drive-less model.

HPE Synergy 480 Gen10 Plus Compute Module support all small form factor (SFF) SAS and SATA HDDs and SSDs currently certified in HPE Smart Carriers. Any exceptions to this qualification will be listed on this page by drive description and part number.

SATA Drives (listed by capacity)

HPE 1TB SATA 6G Business Critical 7.2K SFF SC 1-year Warranty HDD	655710-B21
HPE 2TB SATA 6G Business Critical 7.2K SFF SC 1-year Warranty 512e HDD	765455-B21
HPE 7.68TB SATA 6G Very Read Optimized SFF SC 5210 SSD	P23493-B21
HPE Dual 480GB SATA 6G Read Intensive M.2 to SFF SCM Multi Vendor SSD	P47819-B21
HPE 240GB SATA 6G Read Intensive SFF SC Multi Vendor SSD	P18420-B21
HPE 480GB SATA 6G Read Intensive SFF SC Multi Vendor SSD	P18422-B21
HPE 480GB SATA 6G Read Intensive SFF SC PM893 SSD	P47810-B21
HPE 960GB SATA 6G Read Intensive SFF SC Multi Vendor SSD	P18424-B21
HPE 960GB SATA 6G Read Intensive SFF SC PM893 SSD	P47811-B21
HPE 1.92TB SATA 6G Read Intensive SFF SC Multi Vendor SSD	P18426-B21
HPE 1.9TB SATA 6G Read Intensive SFF SC PM893 SSD	P47812-B21
HPE 1.92TB SATA 6G Read Intensive SFF SC S4520 SSD	P47319-B21
HPE 3.84TB SATA 6G Read Intensive SFF SC Multi Vendor SSD	P18428-B21

Additional Options

HPE 3.84TB SATA 6G Read Intensive SFF SC PM893 SSD	P47813-B21
HPE 3.84TB SATA 6G Read Intensive SFF SC S4520 SSD	P47321-B21
HPE 7.68TB SATA 6G Read Intensive SFF SC Multi Vendor SSD	P18430-B21
HPE 480GB SATA 6G Mixed Use SFF SC Multi Vendor SSD	P18432-B21
HPE 480GB SATA 6G Mixed Use SFF SC PM897 SSD	P47814-B21
HPE 480GB SATA 6G Mixed Use SFF SC S4620 SSD	P47323-B21
HPE 960GB SATA 6G Mixed Use SFF SC Multi Vendor SSD	P18434-B21
HPE 960GB SATA 6G Mixed Use SFF SC PM897 SSD	P47815-B21
HPE 1.92TB SATA 6G Mixed Use SFF SC Multi Vendor SSD	P18436-B21
HPE 1.92TB SATA 6G Mixed Use SFF SC PM897 SSD	P47816-B21
HPE 1.92TB SATA 6G Mixed Use SFF SC S4620 SSD	P47325-B21
HPE 3.84TB SATA 6G Mixed Use SFF SC Multi Vendor SSD	P18438-B21
HPE 3.84TB SATA 6G Mixed Use SFF SC S4620 SSD	P47326-B21

SAS Drives (listed by Capacity)

HPE 1TB SAS 12G Business Critical 7.2K SFF SC 1-year Warranty HDD	832514-B21
HPE 2TB SAS 12G Business Critical 7.2K SFF SC 1-year Warranty 512e HDD	765466-B21
HPE 2.4TB SAS 12G Mission Critical 10K SFF SC 3-year Warranty 512e Multi Vendor HDD	881457-B21
HPE 300GB SAS 12G Mission Critical 10K SFF SC 3-year Warranty Multi Vendor HDD	872475-B21
HPE 600GB SAS 12G Mission Critical 10K SFF SC 3-year Warranty Multi Vendor HDD	872477-B21
HPE 1.2TB SAS 12G Mission Critical 10K SFF SC 3-year Warranty Multi Vendor HDD	872479-B21
HPE 1.8TB SAS 12G Mission Critical 10K SFF SC 3-year Warranty 512e Multi Vendor HDD	872481-B21
HPE 300GB SAS 12G Mission Critical 15K SFF SC 3-year Warranty Multi Vendor HDD	870753-B21
HPE 600GB SAS 12G Mission Critical 15K SFF SC 3-year Warranty Multi Vendor HDD	870757-B21
HPE 900GB SAS 12G Mission Critical 15K SFF SC 3-year Warranty Multi Vendor HDD	870759-B21
HPE 960GB SAS 12G Read Intensive SFF SC Multi Vendor SSD	P49028-B21
HPE 960GB SAS 12G Read Intensive SFF SC Value SAS Multi Vendor SSD	P36997-B21
HPE 1.92TB SAS 12G Read Intensive SFF SC Value SAS Multi Vendor SSD	P36999-B21
HPE 1.92TB SAS 12G Read Intensive SFF SC Multi Vendor SSD	P49030-B21
HPE 3.84TB SAS 12G Read Intensive SFF SC Multi Vendor SSD	P49034-B21
HPE 3.84TB SAS 12G Read Intensive SFF SC Value SAS Multi Vendor SSD	P37001-B21
HPE 7.68TB SAS 12G Read Intensive SFF SC Multi Vendor SSD	P49039-B21
HPE 7.68TB SAS 12G Read Intensive SFF SC Value SAS Multi Vendor SSD	P37003-B21
HPE 15.36TB SAS 12G Read Intensive SFF SC Multi Vendor SSD	P49044-B21
HPE 800GB SAS 12G Mixed Use SFF SC Multi Vendor SSD	P49046-B21
HPE 960GB SAS 12G Mixed Use SFF SC Value SAS Multi Vendor SSD	P37005-B21
HPE 1.6TB SAS 12G Mixed Use SFF SC Multi Vendor SSD	P49048-B21
HPE 1.92TB SAS 12G Mixed Use SFF SC Value SAS Multi Vendor SSD	P37011-B21
HPE 3.2TB SAS 12G Mixed Use SFF SC Multi Vendor SSD	P49052-B21
HPE 3.84TB SAS 12G Mixed Use SFF SC Value SAS Multi Vendor SSD	P37017-B21
HPE 6.4TB SAS 12G Mixed Use SFF SC Multi Vendor SSD	P49056-B21
HPE 400GB SAS 12G Write Intensive SFF SC PM6 SSD	P26295-B21

Additional Options

HPE 800GB SAS 12G Write Intensive SFF SC PM6 SSD	P26372-B21
HPE 1.6TB SAS 12G Write Intensive SFF SC PM6 SSD	P26376-B21

NVMe Drives (listed by Capacity)

HPE 1.9TB NVMe Gen4 Mainstream Performance Read Intensive SFF SC U.3 Static Multi Vendor SSD	P47841-B21
HPE 3.84TB NVMe Gen4 Mainstream Performance Read Intensive SFF SC U.3 Static Multi Vendor SSD	P47842-B21
HPE 15.36TB NVMe Gen4 High Performance Read Intensive SFF SC U.3 PM1733 SSD	P26109-B21
HPE 3.2TB NVMe Gen4 Mainstream Performance Mixed Use SFF SC U.3 Static Multi Vendor SSD	P47835-B21
HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF SC U.3 PM1733 SSD	P26104-B21
HPE 7.68TB NVMe Gen4 Mainstream Performance Read Intensive SFF SC U.3 Static Multi Vendor SSD	P47843-B21
HPE 800GB NVMe Gen4 High Performance Mixed Use SFF SC U.3 PM1735 SSD	P26543-B21
HPE 1.6TB NVMe Gen4 Mainstream Performance Mixed Use SFF SC U.3 Static Multi Vendor SSD	P47834-B21
HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF SC U.3 PM1735 SSD	P26124-B21
HPE 6.4TB NVMe Gen4 Mainstream Performance Mixed Use SFF SC U.3 Static Multi Vendor SSD	P47836-B21

SSD SED Drives (listed by Capacity)

HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF SC Self-encrypting FIPS U.3 CM6 SSD	P44584-B21
HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF SC Self-encrypting FIPS U.3 CM6 SSD	P44568-B21
HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF SC Self-encrypting FIPS U.3 CM6 SSD	P44576-B21
HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF SC Self-encrypting FIPS U.3 CM6 SSD	P44592-B21

M.2 Drive Options

HPE NS204i-d Gen10 Plus NVMe PCIe3 x4 M.2 OS Boot Device	P21410-B21
--	------------

Drive Qualification Exceptions:

At this time there are no exceptions to list.

HPE Security

HPE Trusted Platform Module 2.0 Gen10 Plus Black Rivets Kit	P13771-B21
HPE Gen10 TPM 1.2 FIO Setting	872108-B21
HPE iLO Common Password FIO Setting	P08040-B21

Additional Options

Notes:

- The TPM (Trusted Platform Module) is a microcontroller chip that can securely store artifacts used to authenticate the server platform. These artifacts can include passwords, certificates and encryption keys. Windows® BitLocker™ Drive Encryption (BitLocker) is a data protection feature available in Windows Server® 2012. BitLocker leverages the enhanced security capabilities of a Trusted Platform Module (TPM) version 1.2. The TPM works with BitLocker to help protect user data and to ensure that a server running Windows Server 2012 has not been tampered with while the system was offline.
- For more information about [TPM](#).
- HPE Synergy OS pre-installed units will come with the partition required for TPM deployment.
- The TPM key is unique to every TPM deployed server and must be retained. Misplacing or losing the key could result in data loss.

HPE Networking Mezzanine CNA's

Notes:

- The compute module requires a minimum of one (1) mezzanine network adapter.
- Mezzanine network adapters can be installed in any mezzanine connector. Hewlett Packard Enterprise best practice is to install the first network adapter in mezzanine connector 3 to facilitate installation of Type C and D mezzanines in mezzanine connectors 1 or 2

HPE Synergy 4820C 10/20/25Gb Converged Network Adapter	876449-B21
HPE Synergy 6820C 25/50Gb Converged Network Adapter	P02054-B21

HPE Fibre Channel

HPE Synergy 5330C 32Gb Fibre Channel Host Bus Adapter	870828-B21
HPE Synergy 5830C 32Gb Fibre Channel Host Bus Adapter	777456-B21

HPE Storage Controllers

HPE Synergy Compute Chipset SATA FIO Board Kit	872955-B21
HPE Smart Array P204i-c SR Gen10 (4 Internal Lanes/1GB Cache) 12G SAS Modular Controller	804424-B21
Microchip SmartRAID P416ie-m x16 Lanes 2GB Cache SAS 12G Controller for HPE	P38721-B21
HPE Synergy 480 Gen10 Plus 4x for 2x Split Drive SlimSAS Cable Kit	P29010-B21
HPE Synergy 480 Gen10 Plus x4 NVMe Direct Attach Cable Kit	P29009-B21
HPE FIO Enable Smart Array SW RAID	784308-B21
HPE 96W Smart Storage Lithium-ion Battery with 260mm Cable Kit	P01367-B21
HPE Smart Storage Hybrid Capacitor with 260mm Cable Kit	P02381-B21
HPE Smart Array E208i-c SR Gen10 (8 Internal Lanes/No Cache) 12G SAS Modular Controller	823852-B21
HPE NS204i-d Gen10 Plus NVMe PCIe3 x4 M.2 OS Boot Device	P21410-B21

Notes:

- Contains 2x M.2 NVMe 480GB Drives
- HPE Smart Array S100i SR Gen10 SW RAID is off by default and can be enabled RBSU.
- HPE NS204i-d Gen10Plus Boot Controller (includes 2x 480GB M.2 22110 SSDs - does not work with SY480 Gen10). For use with SY480 Gen Plus product only.
- Premium Backplane Modules, CTO offers a Premium Backplane Compute Module for use with 4 NVMe drives in front drive cage. Also, supports MicroChip Smart RAID P416ie-m SAS Controller for HPE with HPE SY480 Gen10+ SlimSAS Cable

Additional Options

Opt Kit (P29010-B21) connections allowing it to manage 2x SATA/SAS drives and with Backplane Direct Connect support 2x NVMe drives in front drive cage. The MicroChip Smart RAID P416ie-m also supports/manages the HPE D3940 Storage Module.

GPU Expansion PCIe Modules

HPE Synergy 480 2-slot PCIe Expansion Module	P14256-B21
HPE Synergy 480 4-slot PCIe Expansion Module	P14257-B21
HPE Synergy 480 8-slot PCIe Expansion Module	P14258-B21
HPE Synergy Front PCIe GPU Enablement Kit	P15825-B21

PCIe Expansion Module GPU Options for HPE Synergy 480 Gen10 Plus Compute Module

GPU Option	SKU	Cable Kit	Availability
HPE NVIDIA A40	R7E31C	P25493-B21	v
HPE NVIDIA Tesla T4 16GB	R0W29C	N/A	v
HPE NVIDIA A10 24GB	R7G40C	P25497-B21	v

v - Currently available*

X - No longer available*

Notes: *Please check the latest availability information of the cards from your account manager

PCIe Expansion Module Cable Kit Options for Synergy 480 Gen10 Plus Compute Module

Cable Kit Option

HPE Synergy 1x 8-pin 2-pack GPU Cable*	P25493-B21
HPE Synergy 2x 8-pin 0.14m 2-pack Cable	P25497-B21

Notes: *Compatible Expansion Modules are required to add these cards on Synergy (See Expansion Modules section above). If the Expansion Modules have already been purchased, compatible Cable kits may need to be purchased for adding the new GPUs.

Third Party Solutions

Ormuco Cloud Solution(Service Provider)

Ormuco is a turnkey, white label private and/or public cloud solution powered by HPE Rack and/or Synergy infrastructure. The solution is installed and operated by Ormuco in the enterprise or service provider data center and offers fully-featured Openstack/Docker based cloud with value add services in IaaS/PaaS. It offers a multilingual, sophisticated hybrid management end-user and administration portal.

Solution - see <http://www.Ormuco.com>

HPE internal Sales/Presales material can be found on the WW Service Provider Sales Portal SKUs.

Ormuco Installation	
Name	Description
ORM-INS-ENT	Enterprise Customer Site
ORM-INS-SP	Service Provider Customer Site

Notes: HPE should be entitled to a 15% discount on list

Additional Options

Ormuco Software License and Support	
Name	List price per server / month
ORM-SW-SP	\$2,200.00 USD
ORM-SW-ENT	\$1,400.00 USD

Notes: To request a quotation or place an order for the Ormuco SKUs send an email to HILS@hpe.com for WW engagement.

Memory

Memory Subsystem Architecture

Each processor socket contains eight memory channels that support two DIMMs each for a total of 16 DIMM per installed processor or a grand total of thirty two (32) DIMMs for the compute module with 2 processors..

Memory Population Rules and Guidelines

- A minimum of one DIMM is required per processor.
- Install DIMMs only if the corresponding processor is installed.
- If only one processor is installed in a two processor system, only half of the DIMM slots are available.
- DIMM sizes can be mixed in channel. To maximize performance, it is recommended to balance the total memory capacity between all installed processors and to load the channels similarly whenever possible.
- LRDIMM and RDIMMs are all distinct memory technologies and cannot be mixed within a compute module.
- DIMMs of different speeds may be mixed in any order; the compute module will select a common optimal speed.
- The maximum memory speed is a function of the memory type, memory configuration, and processor model.
- The maximum memory capacity is a function of the memory type and number of installed processors.
- HPE memory from previous generation servers is not compatible with the HPE Synergy 480 Gen10 Plus Compute Module.

To realize the performance memory capabilities listed in this document, HPE Smart Memory is required. For additional information, please see the [HPE DDR4 Smart Memory QuickSpecs](#)

Synergy 480 Gen10 Compute Module Memory Tables

Memory Speed Table for Memory used with Intel Scalable Family Gen3 Processors					
	Register DIMM (RDIMM)				
HPE SKU P/N	P07525-B21	P06029-B21	P06031-B21	P40007-B21	P06033-B21
SKU Description	HPE 8GB 1Rx8 PC4-3200AA-R Memory Kit	HPE 16GB 1Rx4 PC4-3200AA-R Memory Kit	HPE 16GB 2Rx8 PC4-3200AA-R Memory Kit	HPE 32GB 1Rx4 PC4-3200AA-R Memory Kit	HPE 32GB 2Rx4 PC4-3200AA-R Memory Kit
DIMM Rank - >	Single Rank (1R)	Single Rank (1R)	Dual Rank (2R)	Single Rank	Dual Rank (2R)
DIMM Capacity ->	8GB	16GB	16GB	32GB	32GB
Voltage	1.2V	1.2V	1.2V	1.2V	1.2V
DRAM depth [bit]	1G	2G	1G	4G	2G
DRAM Width [bit]	x8	x4	x8	x4	x4
DRAM Density	8Gb	8Gb	8Gb	16Gb	8Gb
CAS Latency	22-22-22	22-22-22	22-22-22	22-22-22	22-22-22
DIMM Native Speed (MT/s)	3200	3200	3200	3200	3200
Max Capacity GB	256	512	512	1024	1024

Memory

Register DIMM (RDIMM)					
HPE Server Memory speed (MT/s): Intel® Xeon® Platinum/Gold 83xx/63xx processors					
1 DIMM Per Channel	3200	3200	3200	3200	3200
2 DIMM Per Channel (HPE)	3200	3200	3200	3200	3200
HPE Server Memory speed (MT/s): Intel Xeon Gold 53xx processors					
1 DIMM Per Channel	2933	2933	2933	2933	2933
2 DIMM Per Channel	2933	2933	2933	2933	2933
HPE Server Memory speed (MT/s): Intel Xeon Silver 43xx processors					
1 DIMM Per Channel	2666	2666	2666	2666	2666
2 DIMM Per Channel	2666	2666	2666	2666	2666

Memory Speed Table for Memory used with Intel Scalable Family Gen3 Processors			
	Register DIMM (RDIMM)	LRDIMM	LRDIMM
HPE SKU P/N	P06035-B21	P06037-B21	P45867-B21 Sept Availability
SKU Description	HPE 64GB 2Rx4 PC4-3200AA-R Memory Kit	HPE 128GB 4Rx4 PC4-3200AA-LRDIMM Memory Kit	HPE SY 256GB 8Rx4 PC4-3200AA-LRDIMM 3DS Memory
DIMM Rank ->	Dual Rank (2R)	Quad Rank (4R)	Octal Rank (8R)
DIMM Capacity ->	64GB	128GB	256GB
Voltage	1.2V	1.2V	1.2V
DRAM depth [bit]	4G	4G	4G
DRAM Width [bit]	X4	x4	X4
DRAM Density	16Gb	16Gb	16Gb
CAS Latency	22-22-22	22-22-22	22-22-22
DIMM Native Speed (MT/s)	3200	3200	3200
Max Capacity GB	2048	4096	8192
HPE Server Memory speed (MT/s): Intel® Xeon® Platinum/Gold 83xx/63xx processors			
1 DIMM Per Channel	3200	3200	3200
2 DIMM Per Channel (HPE)	3200	3200	3200
HPE Server Memory speed (MT/s): Intel Xeon Gold 53xx processors			
1 DIMM Per Channel	2933	2933	2933

Memory


2 DIMM Per Channel	2933	2933	2933
HPE Server Memory speed (MT/s): Intel Xeon Silver 43xx processors			
1 DIMM Per Channel	2666	2666	2666
2 DIMM Per Channel	2666	2666	2666

Notes:

- The maximum memory speed is a function of the memory type, memory configuration, and processor model.
- The information contained herein is subject to change without notice. HPE Confidential. Not for customer viewing. Do not distribute.

Memory Population Rules and Guidelines

Drawing showing SY480 Plus system board layout for processors and memory.

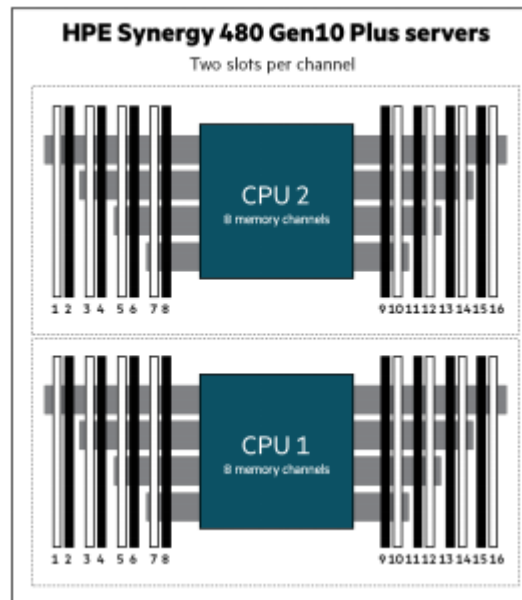

Memory

Population guidelines for HPE Smart Memory DIMMs in HPE Synergy 480 Gen10 Plus Compute Modules

HPE Synergy 480 Gen10 Plus Compute Modules have twelve DIMM slots per CPU.

Table: Population guidelines for HPE Smart Memory DIMMs in HPE Synergy 480 Gen10 Plus Compute Modules

HPE Synergy 480 Gen10 Plus servers per CPU DIMM population order																	
CPU 1																	
1 DIMM																14	
2 DIMMs			3													14	
4 DIMMs			3				7			10						14	
6 DIMMs	1		3				7			10						14	16
8 DIMMs	1		3		5		7			10		12				14	16
12 DIMMs*	1	2	3	4			7	8	9	10			13	14	15	16	
12 DIMMs**	1		3	4	5		7	8	9	10		12	13	14			16
16 DIMMs	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	
CPU 2																	
1 DIMM			3														
2 DIMMs			3													14	
4 DIMMs			3				7			10						14	
6 DIMMs	1		3				7			10						14	16
8 DIMMs	1		3		5		7			10		12				14	16
12 DIMMs*	1	2	3	4			7	8	9	10			13	14	15	16	
12 DIMMs**	1		3	4	5		7	8	9	10		12	13	14			16
16 DIMMs	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	

Notes:

– *Supported for 6-way interleave.

– **Unbalanced: Supported for SNC 2, 2-/4-/8-way interleave.

– Cells without entries represent configurations not supported, and if populated, the server may result in non-optimal memory performance or other unexpected behavior.

For more information or additional DIMM configurations go to:

<https://h20195.www2.hpe.com/v2/getdocument.aspx?docname=a00017079enw>

Population Guidelines for HPE Smart Memory DIMMs.

For data-intensive workloads where latency and capacity are key considerations, HPE Synergy servers deliver faster data access at a reasonable price point when equipped with HPE Persistent Memory 128, 256, or 512 GB modules featuring Intel Optane 200 Persistent Memory. This new persistent memory offering, based on phase-change memory technology, must be included alongside HPE Smart Memory DIMMs. DIMMs and HPE Persistent Memory modules are installed in specific configurations based on the workload requirements of the server. Supported configurations are optimized for persistent memory capacity, volatile memory capacity, and performance.

- Persistent memory capacity-the available capacity is equal to the HPE Persistent Memory capacity.

Volatile memory capacity

- App Direct (1 LM) mode-the volatile capacity is equal to the DIMM capacity.
- Memory (2 LM) mode-the volatile capacity is some or all of the HPE Persistent Memory capacity.

Memory

Performance

- Uses all channels to efficiently utilize processor resources.
- Memory (2 LM) mode-more regular DIMMs provide a better cache ratio.

HPE Synergy 480 Gen10 Plus servers per CPU DIMM population order																	
CPU 1																	
Mode	DDR4+ PMem	Slot 1	Slot 2	Slot 3	Slot 4	Slot 5	Slot 6	Slot 7	Slot 8	Slot 9	Slot 10	Slot 11	Slot 12	Slot 13	Slot 14	Slot 15	Slot 16
AD, MM	4+4	D		P		D		P			P		D		P		D
AD	6+1	D		D				D			D		P		D		D
AD	8+1	D		D		D		D			D		D	P	D		D
AD, MM	8+4	D		D	P	D		D	P	P	D		D	P	D		D
AD, MM	8+8	D	P	D	P	D	P	D	P	P	D	P	D	P	D	P	D
AD	12+2	P		D	D	D	D	D	D	D	D	D	D	D	D		P
CPU 2																	
Mode	DDR4+ PMem	Slot 1	Slot 2	Slot 3	Slot 4	Slot 5	Slot 6	Slot 7	Slot 8	Slot 9	Slot 10	Slot 11	Slot 12	Slot 13	Slot 14	Slot 15	Slot 16
AD, MM	4+4	D		P		D		P			P		D		P		D
AD	6+1	D		D		P		D			D				D		D
AD	8+1	D		D	P	D		D			D		D		D		D
AD, MM	8+4	D		D	P	D		D	P	P	D		D	P	D		D
AD, MM	8+8	D	P	D	P	D	P	D	P	P	D	P	D	P	D	P	D
AD	12+2	P		D	D	D	D	D	D	D	D	D	D	D	D		P

Notes:

– Persistent Memory (P)


– DIMMs (D)

– App Direct mode (AD)

– Memory mode (MM)

– P07525-B21 - HPE 8GB 1Rx8 3200 RDIMM does not support pairing with Intel Optane PMem 200 series for HPE

Internal Fabric Routing

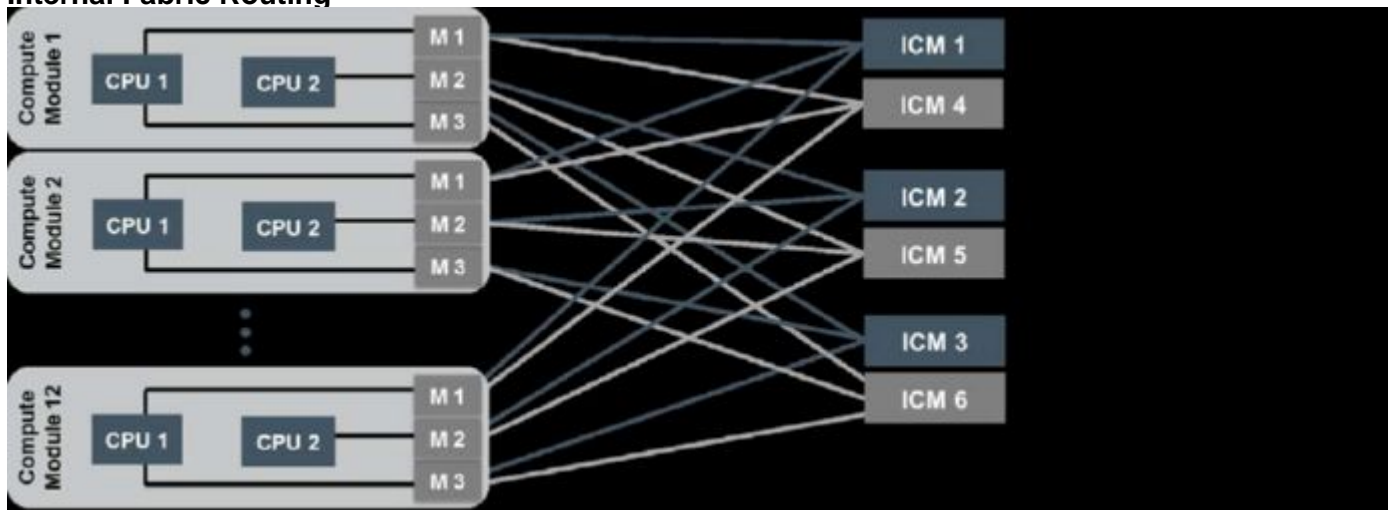

Memory

Energy Efficiency

Target Fiscal Year is set to be FY2021 for server-type computers	
Manufacture Name	Hewlett Packard Enterprise Company
Product Name	HPE Synergy 480 Gen 10 Plus
HDD Information	HPE / EH000900JWCPN
CPU Model Information	Intel / Silver 4309Y
Number of Memory DIMMs	16
Memory DIMM Size (GB)	8
Processor Type	X86
Number of CPU Sockets	2
Category	B (2)
SERT Efficiency Score	22.4
Target	11.9

Technical Specifications

System Unit

Dimensions (H x W x D)

With Bezel

- 6.35 x 21.4 x 60.0 cm
- 2.5 x 8.43 x 23.62 in

Weight (approximate)

- 8.16 kg / 18 lb
Maximum: all processors, 24 DIMMs, drives, mezzanine cards, and one flash cache battery installed
- 6.57 kg / 14.5 lb
Minimum: one processor and 1 DIMM installed

Power Specifications

For power specifications including input requirements, BTU rating, and power supply output, please see the HPE Synergy Frame QuickSpecs.

To review typical system power ratings use the HPE Power Advisor which is available via the online tool located at <http://www.hpe.com/info/hpepoweradvisor>.

System Inlet Temperature

- Operating: 10°C to 35°C (50°F to 95°F)
 - The upper limit may be limited by the type and number of options installed.
 - System performance may be reduced if operating with a fan fault.
- Non-operating: -30C to 60C (-22F to 140F).
- Standard Operating Temperature 10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 20°C/hr (36°F/hr). The upper limit and rate of change may be limited by the type and number of options installed.

System performance during standard operating support may be reduced if operating with a fan fault or above 30°C (86°F).

- Extended Ambient Operating Temperature For approved hardware configurations, the supported system inlet range is extended to be: 5° to 10°C (41° to 50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: <http://www.hpe.com/servers/ashrae> For approved hardware configurations, the supported system inlet range is extended to be: 40° to 45°C (104° to 113°F) at sea level with an altitude derating of 1.0°C per every 125 m (1.8°F per every 410 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: <http://www.hpe.com/servers/ashrae>

System performance may be reduced if operating in the extended ambient operating range or with a fan fault.

- Non-operating -30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr)

Extended Ambient Operating Support

Qualifications for extended ambient configurations are detailed at: <https://www.hpe.com/servers/ASHRAE>

Technical Specifications

Relative Humidity (non-condensing)

- Operating: 10% to 90% @ 28C (82.4F)
 - Non-operating: 5% to 95% @ 38.7C (101.7F)
-

Acoustic Noise

For acoustic noise specifications, please see the HPE Synergy 12000 Frame QuickSpecs.

Notes:

- For technical information on the controllers for this product, visit the [HPE Smart Array E208i-c SR Gen10 \(8 Internal Lanes/No Cache\) 12G SAS Modular Controller QuickSpecs](#).
 - For technical information on the controllers for this product, visit the [HPE Smart Array P204i-c SR Gen10 \(4 Internal Lanes/1GB Cache\) 12G SAS Modular Controller QuickSpecs](#).
 - For technical information on the controllers for this product, visit the [MicroChip Smart RAID P416ie-m x16 Lanes 2GB](#)
 - [Cache SAS 12G Controller for HPE Mezzanine Controller QuickSpecs](#).
-

Network Options QuickSpecs/Details:

- For information on the HPE Smart Array S100i SR Gen10 Controller please refer to their [QuickSpecs](#).
 - For information on the HPE Smart Array E208i-c SR Gen10 Controller please refer to their [QuickSpecs](#).
 - For information on the HPE Smart Array P204i-c SR Gen10 Controller please refer to their [QuickSpecs](#).
 - For information on the MicroChip Smart RAID P416ie-m x16 Lanes 2GB Cache SAS 12G Controller for HPE please refer to their [QuickSpecs](#)
 - Support for Network Partitioning (NPAR) when using Pass-thru modules.
http://h20195.www2.hpe.com/v2/redirect.aspx?/products/quickspecs/15418_div/15418_div.PDF
-

ErP Lot9

The European Parliament (ErP) is responsible for setting the ecological standards for products that are imported into the EU. The European Parliament Commission Regulation 2019/424 (also known as the ErP Lot 9 regulation) are a new set of product standards that deal with servers and data storage devices and goes into effect on March 1, 2020. Products that are not compliant with Lot 9 requirements cannot be imported into the European Union after March 1, 2020. For details see Tech Specs section of this document. See Configure to Order section for details on configurable options.

For additional information, please visit: <https://www.hpe.com/us/en/about/environment/msds-specs-more.html> .

Documents provided by HPE: Lot 9 Declarations, White paper, and FAQ.

Environment-friendly Products and Approach - End-of-life Management and Recycling

Hewlett Packard Enterprise offers [End-of-life product return, Trade-in, and Recycling programs](#), in many geographic areas, for our products. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.



Technical Specifications

Summary of Changes

Date	Version History	Action	Description of Change
08-Aug-2022	Version 9	Changed	Additional Options section was updated
20-Jun-2022	Version 8	Changed	Overview, Standard Features and Configuration Information sections were updated SKU - R9H23C was added Obsolete SKU - P19896-B21 was removed and replaced
02-May-2022	Version 7	Changed	Standard Features and Additional Options sections were updated Obsolete SKUs were removed
21-Feb-2022	Version 6	Changed	Additional Options section was updated Obsolete SKUs were removed
06-Dec-2021	Version 5	Changed	Overview and Additional Options sections were updated Obsolete SKU was removed
01-Nov-2021	Version 4	Changed	Service and Support Pointnext Tech Care and Complete Care information updated Obsolete SKUs were removed
07-Sep-2021	Version 3	Changed	Updated from SFG Overview, Standard Features, Optional Features, Services and Support, Configuration Information, Additional Options, Memory, Technical Specifications, sections were updated Service and Support Pointnext Tech Care information added
02-Aug-2021	Version 2	Changed	Overview, Standard Features, Configuration Information, Additional Options, Memory sections were updated. Service and Support Pointnext information added
06-Jul-2021	Version 1	Created	New QuickSpecs

Copyright

Make the right purchase decision. Contact our presales specialists.

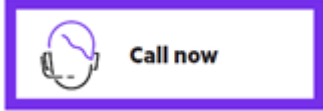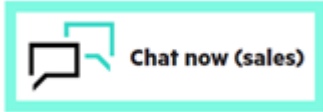

© Copyright 2022 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Intel® and Xeon® are registered trademarks of Intel Corporation in the U.S. and other countries.

Microsoft®, Windows®, and Windows Server® are U.S. registered trademarks of the Microsoft group of companies.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less

a50002575enw - 16730 - Worldwide - V9 - 08-August-2022

